


Geberit Silent-PP dvostruka ugaona račva 87,5°



Primer slike

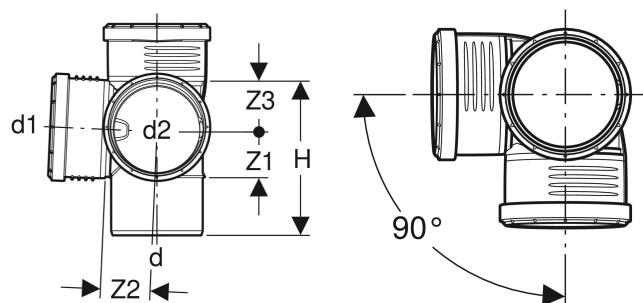

NAMENE

- Za odvođenje otpadnih voda unutar zgrada

PREDNOSTI

- Optimalna zvučna izolacija
- Zaptivka od EPDM

TEHNIČKI PODACI

Temperatura pri montaži	-10 – +40 °C
Materijal proizvoda	PP-MD
Linearno istezanje	0.08 mm/(m·K)

Br. art.	DN	d, ø mm	d1, ø mm	d2, ø mm	arc °	H cm	Z1 cm	Z2 cm	Z3 cm
390.459.14.1	90 / 90 / 90	90	90	90	87.5	15.7	4.6	5	5
390.559.14.1	100 / 100 / 100	110	110	110	87.5	18.6	5.6	6	6.1
390.662.14.1	125 / 100 / 100	125	110	110	87.5	21.3	6.6	7.8	7.3