

KVL-1 3p M10-M10

Fuse switch disconnecter



ETI Code:	001690872
Type of Installation:	Base plate mounting
Type description:	KVL
Size:	NH1
Rated current:	250 A
Number of poles:	3
Rated AC voltage:	690 V
Rated DC voltage:	440 V
Utilization category:	AC-23B, DC-22B
Type (Legacy):	KVL

[Online product page](#) 

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Version as safety switch	Yes
Suitable for floor mounting	Yes
Rated permanent current I _n	250 A
Suitable for fuses	NH1
Type of control element	Cover grip
Type of electrical connection of main circuit	Screw connection
Number of poles	3
Version as main switch	Yes

Logistics


Product

Net depth	116.3 mm
Net weight of the product	2.03 kg
Net width	183.5 mm
Net height	305.8 mm
Stock unit of measure	pcs



Transport Packaging

Transport packaging weight	1.937 kg
Transport packaging volume	9.375 dm³
Transport packaging quantity	1 pcs
Customs tariff	85363090
Transport Packaging Dimensions Height	192 mm
Transport Packaging Dimensions Width	313 mm
Transport Packaging Dimensions Depth	156 mm
EAN code for a transport packaging	3838895822844
Pallet quantity	72 pcs

Dimension

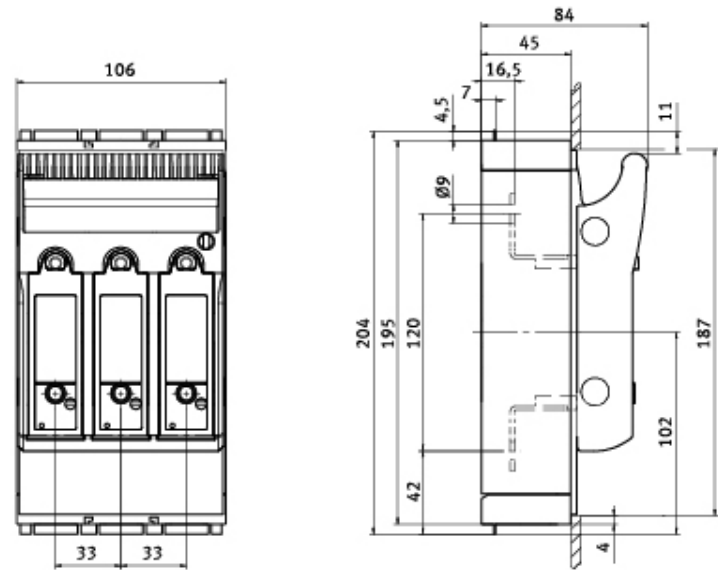

KVL-00 3p M8-M8
KVL-00 3p BC95-BC95
KVL-00 3p M8-M8 LED
KVL-00 3p BC95-BC95 LED

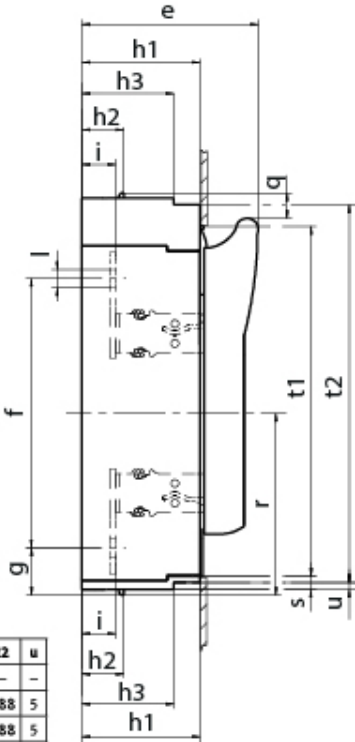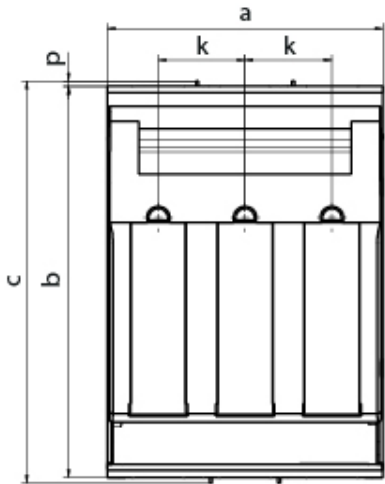

	a	b	c	e	f	g	h1	h2	h3	i	k	l	p	q	r	s	t1	t2	u
KVL-1 3p M10-M10 (LED)	184	298	306	117	185	46	70	32	-	25	58	Ø10,5	4	19	138	5	272	-	-
KVL-2 3p M10-M10 (LED)	210	298	306	134	205	36	90	32	70	26	66	Ø14	4	19	138	10	268	288	5
KVL-3 3p M10-M10 (LED)	250	298	306	143	205	36	90	32	70	26	82	Ø14	4	19	138	10	268	288	5