

# KVL-2 3p M10-M10

Fuse switch disconnecter



|                       |                     |
|-----------------------|---------------------|
| ETI Code:             | 001690873           |
| Type of Installation: | Base plate mounting |
| Type description:     | KVL                 |
| Size:                 | NH2                 |
| Rated current:        | 400 A               |
| Number of poles:      | 3                   |
| Rated AC voltage:     | 690 V               |
| Rated DC voltage:     | 440 V               |
| Utilization category: | AC-23B, DC-22B      |
| Type (Legacy):        | KVL                 |

[Online product page](#) 

## Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

## ETIM

|                                               |                         |
|-----------------------------------------------|-------------------------|
| Version as safety switch                      | <b>Yes</b>              |
| Suitable for floor mounting                   | <b>Yes</b>              |
| Rated permanent current I <sub>n</sub>        | <b>400 A</b>            |
| Suitable for fuses                            | <b>NH2</b>              |
| Type of control element                       | <b>Cover grip</b>       |
| Type of electrical connection of main circuit | <b>Screw connection</b> |
| Number of poles                               | <b>3</b>                |
| Version as main switch                        | <b>Yes</b>              |

## Logistics


### Product

|                           |                 |
|---------------------------|-----------------|
| Net depth                 | <b>134 mm</b>   |
| Net weight of the product | <b>3.42 kg</b>  |
| Net width                 | <b>209.5 mm</b> |
| Net height                | <b>306 mm</b>   |
| Stock unit of measure     | <b>pcs</b>      |



### Transport Packaging

|                                       |                              |
|---------------------------------------|------------------------------|
| Transport packaging weight            | <b>3.456 kg</b>              |
| Transport packaging volume            | <b>11.629 dm<sup>3</sup></b> |
| Transport packaging quantity          | <b>1 pcs</b>                 |
| Customs tariff                        | <b>85363090</b>              |
| Transport Packaging Dimensions Height | <b>216 mm</b>                |
| Transport Packaging Dimensions Width  | <b>313 mm</b>                |
| Transport Packaging Dimensions Depth  | <b>172 mm</b>                |
| EAN code for a transport packaging    | <b>3838895822851</b>         |
| Pallet quantity                       | <b>48 pcs</b>                |

Dimension

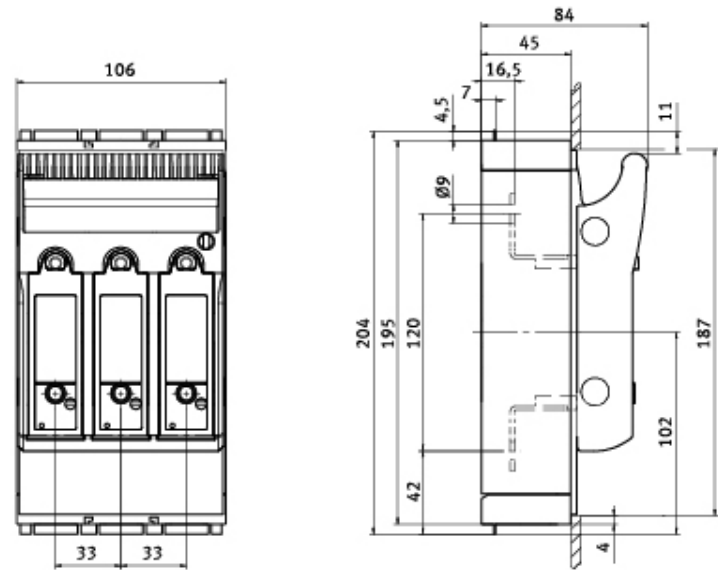

|                         |
|-------------------------|
| KVL-00 3p M8-M8         |
| KVL-00 3p BC95-BC95     |
| KVL-00 3p M8-M8 LED     |
| KVL-00 3p BC95-BC95 LED |

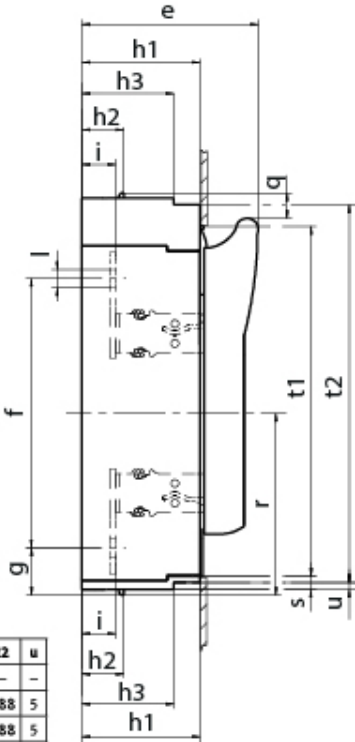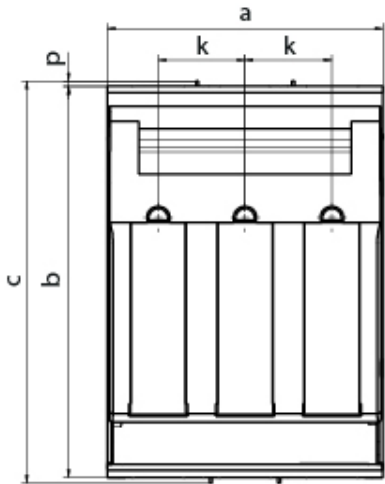

|                        | a   | b   | c   | e   | f   | g  | h1 | h2 | h3 | i  | k  | l     | p | q  | r   | s  | t1  | t2  | u |
|------------------------|-----|-----|-----|-----|-----|----|----|----|----|----|----|-------|---|----|-----|----|-----|-----|---|
| KVL-1 3p M10-M10 (LED) | 184 | 298 | 306 | 117 | 185 | 46 | 70 | 32 | -  | 25 | 58 | Ø10,5 | 4 | 19 | 138 | 5  | 272 | -   | - |
| KVL-2 3p M10-M10 (LED) | 210 | 298 | 306 | 134 | 205 | 36 | 90 | 32 | 70 | 26 | 66 | Ø14   | 4 | 19 | 138 | 10 | 268 | 288 | 5 |
| KVL-3 3p M10-M10 (LED) | 250 | 298 | 306 | 143 | 205 | 36 | 90 | 32 | 70 | 26 | 82 | Ø14   | 4 | 19 | 138 | 10 | 268 | 288 | 5 |