

HVL 4a 3P 2xM12 1600

Fuse switch disconnecter



ETI Code:	001692630
Type of Installation:	Base plate mounting
Type description:	HVL
Size:	NH4a
Rated current:	1600 A
Number of poles:	3
Rated AC voltage:	690 V
Utilization category:	AC-22B
Type (Legacy):	HVL

[Online product page](#) 

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated permanent current Iu	1,600 A
Suitable for fuses	NH4a
Degree of protection (IP), front side	Other
Number of poles	3

Logistics


Product

Net depth	223 mm
Net weight of the product	16.077 kg
Net width	331 mm
Net height	354.5 mm
Stock unit of measure	pcs

Transport Packaging

Transport packaging weight	16.628 kg
Transport packaging volume	27.382 dm³
Transport packaging quantity	1 pcs
Customs tariff	85365080
Transport Packaging Dimensions Height	359 mm
Transport Packaging Dimensions Width	336 mm
Transport Packaging Dimensions Depth	227 mm
EAN code for a transport packaging	4029155170976
Pallet quantity	24 pcs

Dimension

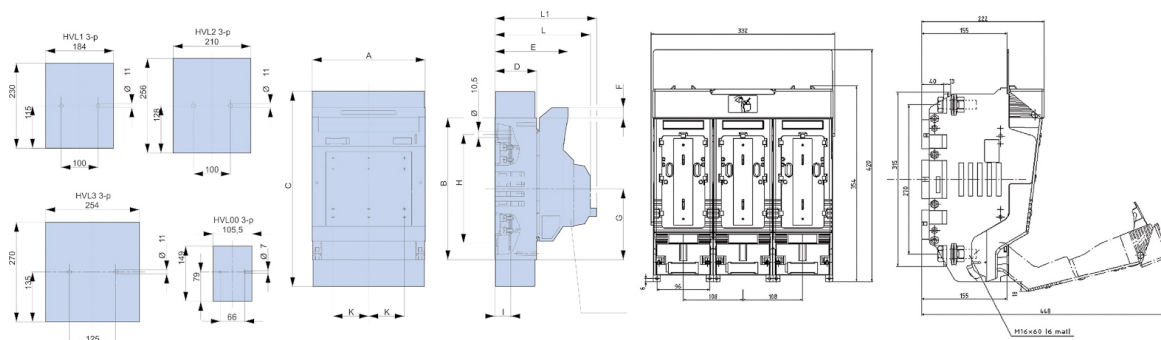

HVL 4a - 3p

Typ	A	B	C	D	E	F	G	H	I	K	L	L1
HVL00 3-p	105,5	149	220	45	86	20,5	74,5	120	17	33	116	126
HVL1 3-p	184	230	317	68	119	16,5	115	177	25	58	149	159
HVL2 3-p	210	256	397	81	133	16,5	128	205	25	66	163	173
HVL3 3-p	254	270	430	96	147	9	135	220,5	30,5	82	177	187

HVL 00,1,2,3 - 3p