

D02 gG 20A/400V

Fuse link



ETI Code:	002212001
Catalogue Group:	D0 low voltage Fuses
Fuse type:	D0
Product group:	D0 low voltage Fuses
Type description:	D0
Type (Legacy):	D0
Size:	D02
Time-Current Characteristic:	gG
Rated AC voltage:	400 V
Rated DC voltage:	250 V
Rated current:	20 A
Power dissipation:	2.7 W
Breaking capacity AC:	50 kA
Breaking capacity DC:	8 kA
Prearcing joule integral (A2s):	740
Operating joule integral (A2s):	1,800
Indicator:	Top fuse status indicator
Standards:	DIN EN 60269-1, DIN EN 60269-3
Application:	For cable protection

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Colour code	Blue
Construction size	D02
Rated voltage	400 V
Rated current	20 A

Logistics

Product

Net depth	15.9 mm
Net weight of the product	12 g
Net width	15.9 mm
Net height	35.7 mm
Stock unit of measure	pcs
EAN code for a single product	5904722906082


Basic Packaging

EAN code for a basic packaging	3838895000532
Basic packaging weight	0.128 kg
Basic Packaging Dimensions Depth	0.032 m
Basic Packaging Dimensions Height	0.04 m
Basic packaging volume	0 m ³
Basic Packaging Dimensions Width	0.081 m
Basic packaging quantity	10 pcs


Transport Packaging

Transport packaging weight	6.58 kg
Transport packaging volume	0.006 m ³
Transport packaging quantity	500 pcs
Customs tariff	85361050
Transport Packaging Dimensions Height	0.178 m
Transport Packaging Dimensions Width	0.21 m
Transport Packaging Dimensions Depth	0.17 m
EAN code for a transport packaging	3838895162490
Pallet quantity	40,000 pcs


I/t characteristic

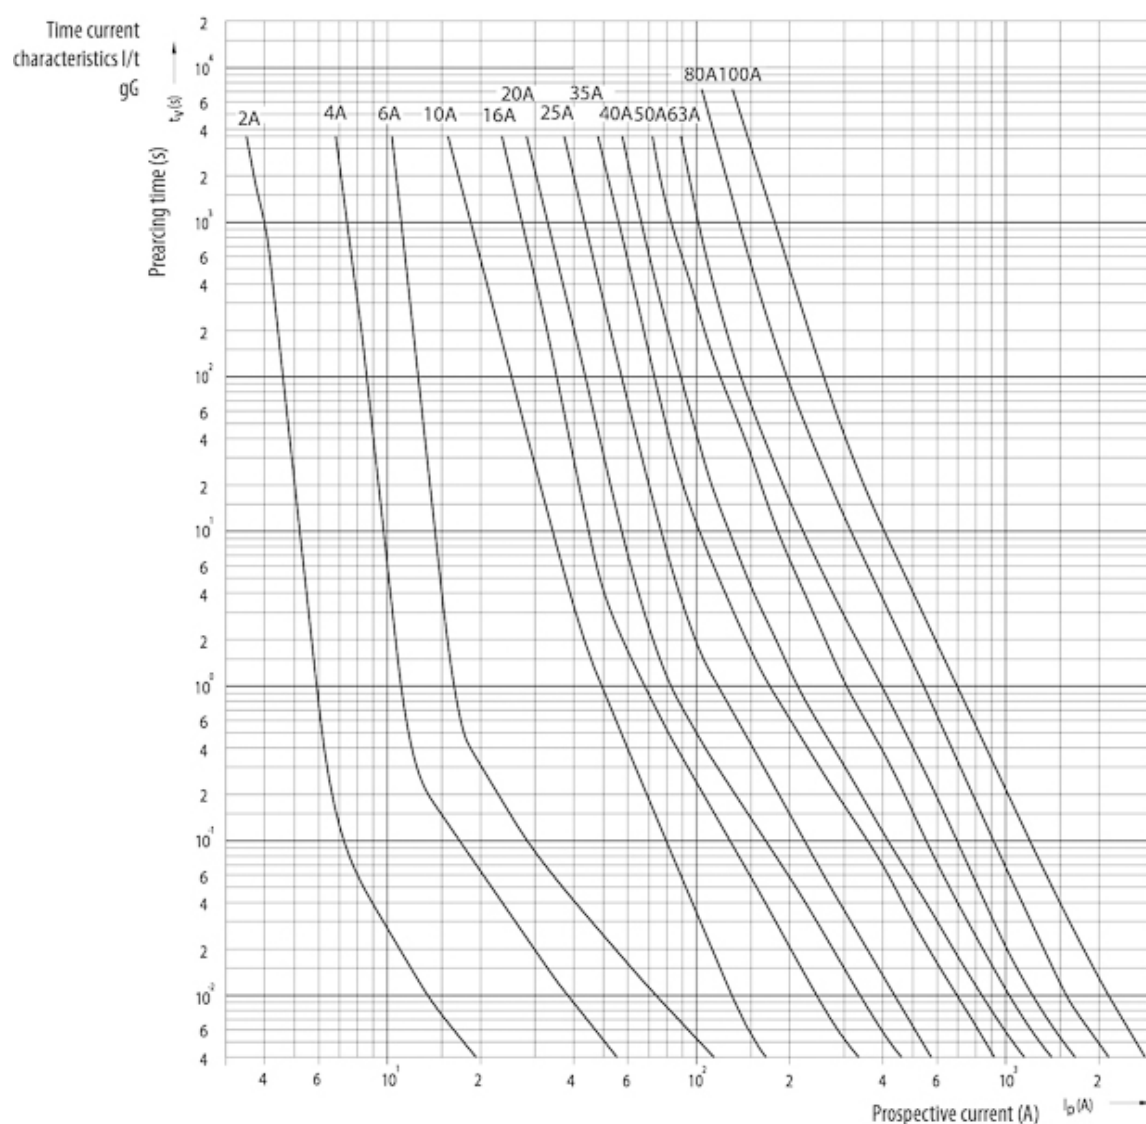

CutOff

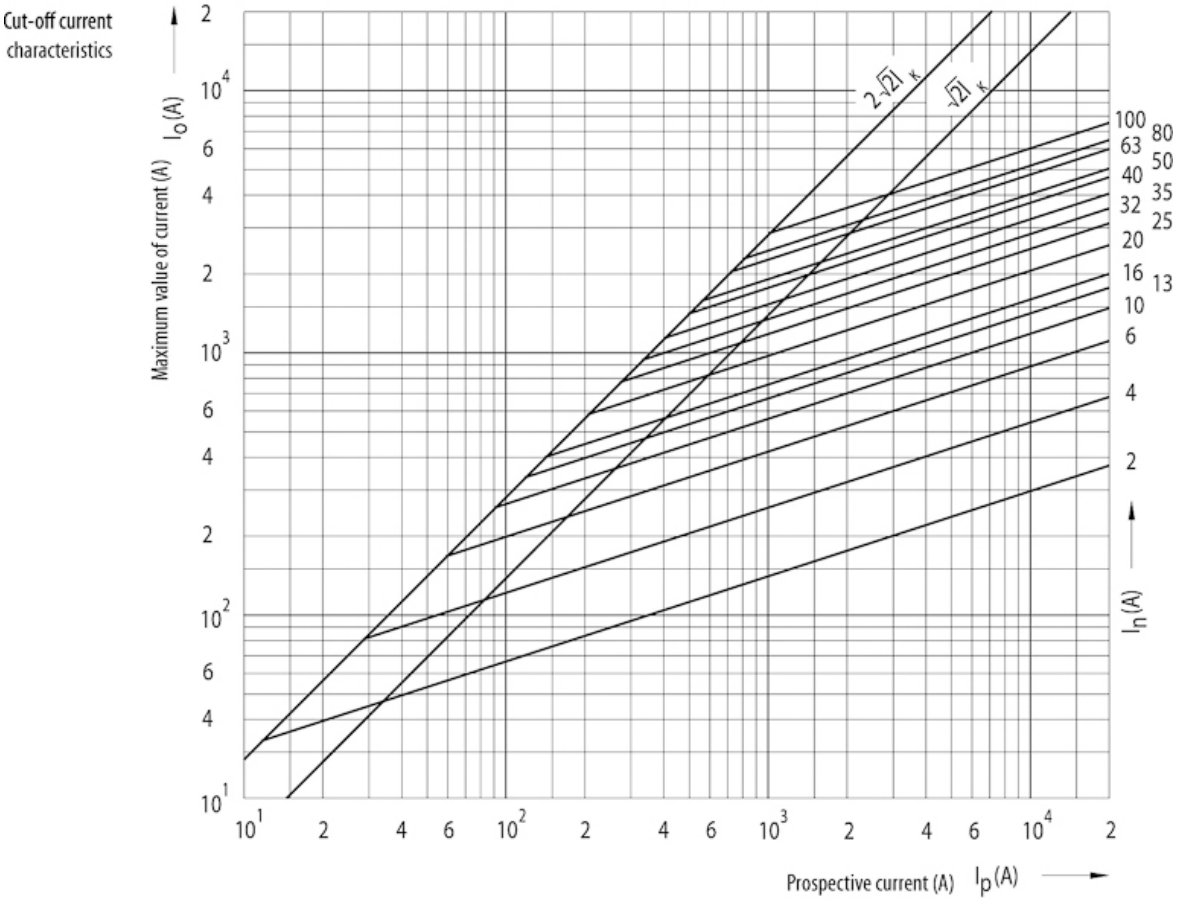

Dimension

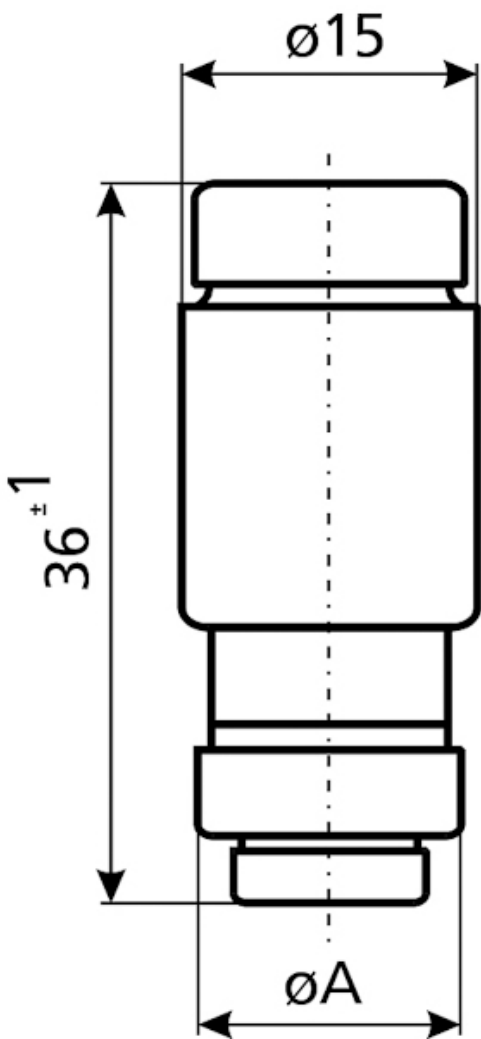

I_n [A]	$\varnothing A$
20	10,9
25	12,1
32	13,3
35	13,3
40	13,3
50	14,5
63	15,9

Energy characteristic

Melting energy
characteristics I^2t

