

# DI DZ 16A/500V

## Fuse link



|                              |                                |
|------------------------------|--------------------------------|
| ETI Code:                    | 002311105                      |
| Catalogue Group:             | D Low voltage Fuses            |
| Application:                 | For cable protection           |
| Product group:               | D Low voltage Fuses            |
| Type description:            | D                              |
| Type (Legacy):               | D                              |
| Size:                        | DI                             |
| Time-Current Characteristic: | DZ                             |
| Rated AC voltage:            | 500 V                          |
| Rated DC voltage:            | 250 V                          |
| Rated current:               | 16 A                           |
| Power dissipation:           | 3.7 W                          |
| Breaking capacity AC:        | 50 kA                          |
| Breaking capacity DC:        | 8 kA                           |
| Fuse type:                   | D                              |
| Indicator:                   | Top fuse status indicator      |
| Standards:                   | DIN EN 60269-1, DIN EN 60269-3 |

[Online product page](#)

## Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



EPLAN FILE

## ETIM

|                        |                 |
|------------------------|-----------------|
| Colour code            | <b>Grey</b>     |
| Release characteristic | <b>Fast (F)</b> |
| Construction size      | <b>DI</b>       |
| Rated voltage          | <b>500 V</b>    |
| Rated current          | <b>16 A</b>     |
| Utilization category   | <b>Other</b>    |

## Logistics

### Product

|                               |                      |
|-------------------------------|----------------------|
| Net depth                     | <b>50 mm</b>         |
| Net weight of the product     | <b>13 g</b>          |
| Net width                     | <b>13 mm</b>         |
| Net height                    | <b>13 mm</b>         |
| Stock unit of measure         | <b>pcs</b>           |
| EAN code for a single product | <b>5904722904835</b> |


### Basic Packaging

|                                   |                      |
|-----------------------------------|----------------------|
| EAN code for a basic packaging    | <b>3838895279389</b> |
| Basic packaging weight            | <b>0.136 kg</b>      |
| Basic Packaging Dimensions Depth  | <b>0.028 m</b>       |
| Basic Packaging Dimensions Height | <b>0.053 m</b>       |
| Basic packaging volume            | <b>0 m³</b>          |
| Basic Packaging Dimensions Width  | <b>0.068 m</b>       |
| Basic packaging quantity          | <b>10 pcs</b>        |

### Transport Packaging


|                                       |                      |
|---------------------------------------|----------------------|
| Transport packaging weight            | <b>6.98 kg</b>       |
| Transport packaging volume            | <b>0.006 m³</b>      |
| Transport packaging quantity          | <b>500 pcs</b>       |
| Customs tariff                        | <b>85361050</b>      |
| Transport Packaging Dimensions Height | <b>0.178 m</b>       |
| Transport Packaging Dimensions Width  | <b>0.21 m</b>        |
| Transport Packaging Dimensions Depth  | <b>0.17 m</b>        |
| EAN code for a transport packaging    | <b>3838895279396</b> |
| Pallet quantity                       | <b>60,000 pcs</b>    |

Dimension

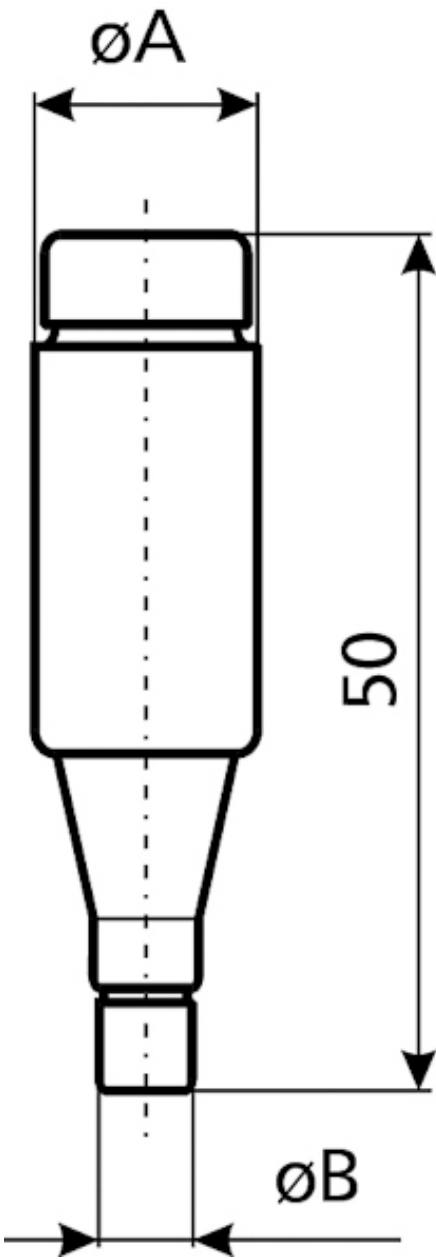


| [A] | $\varnothing A$ | $\varnothing B$ |
|-----|-----------------|-----------------|
| 2   | 13,2            | 6               |
| 4   | 13,2            | 6               |
| 6   | 13,2            | 6               |
| 10  | 13,2            | 8               |
| 16  | 13,2            | 10              |
| 20  | 13,2            | 12              |
| 25  | 13,2            | 14              |

## Energy characteristic

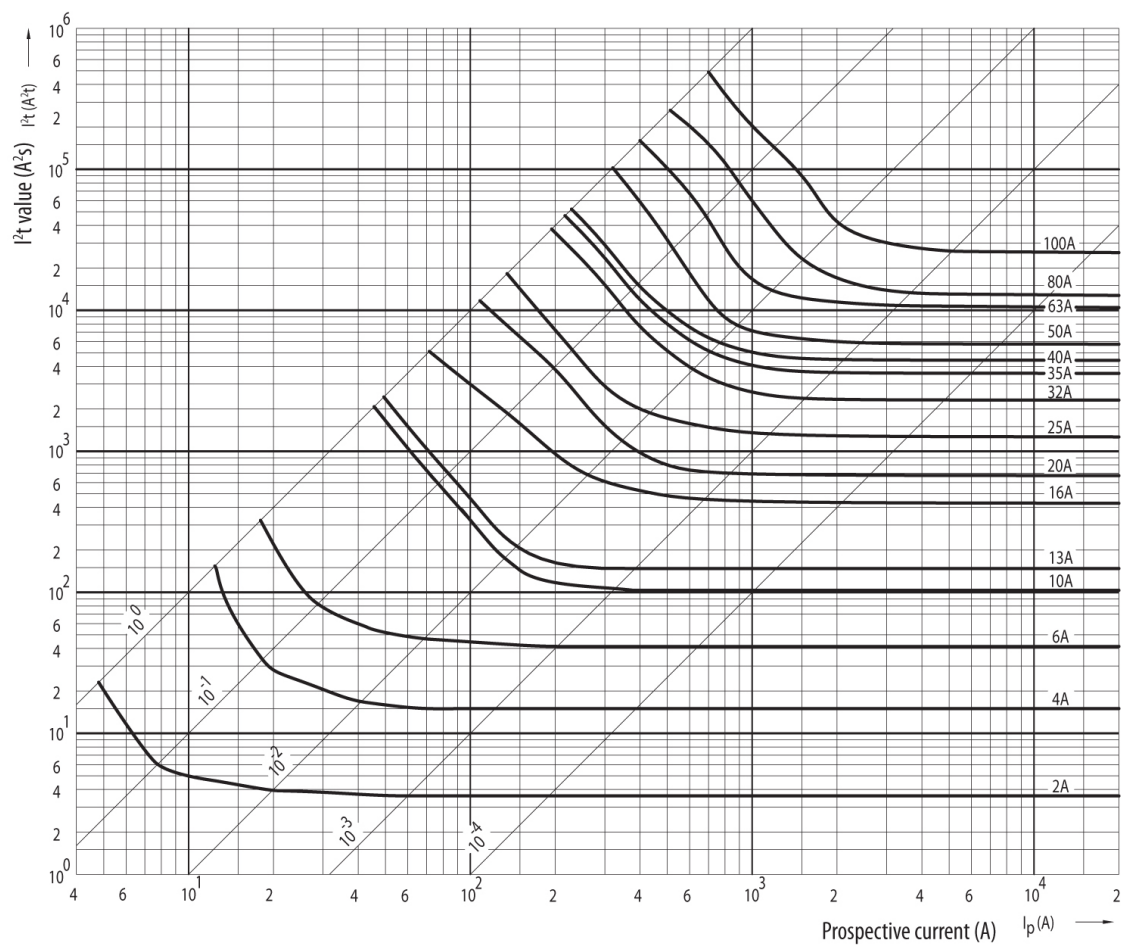

I/t characteristic

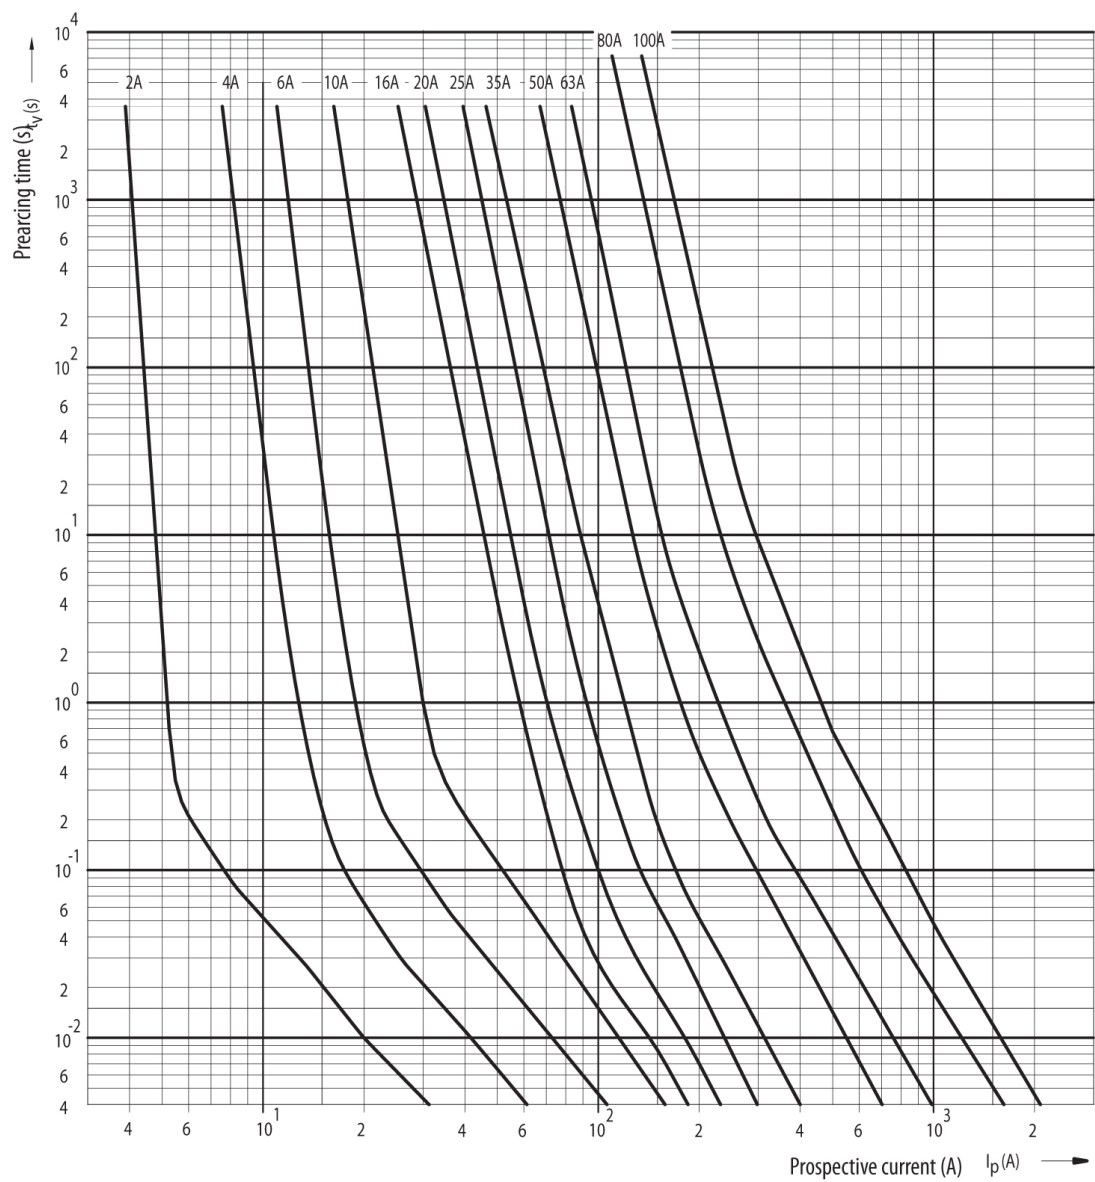

CutOff

