

DI gG 10A/500V

Fuse link



ETI Code:	002311404
Catalogue Group:	D Low voltage Fuses
Application:	For cable protection
Product group:	D Low voltage Fuses
Type description:	D
Type (Legacy):	D
Size:	DI
Time-Current Characteristic:	gG
Rated AC voltage:	500 V
Rated DC voltage:	250 V
Rated current:	10 A
Power dissipation:	1.6 W
Breaking capacity AC:	50 kA
Breaking capacity DC:	8 kA
Fuse type:	D
Indicator:	Top fuse status indicator
Standards:	DIN EN 60269-1, DIN EN 60269-3

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



CERTIFICATE



2D FILE



EPLAN FILE

ETIM

Colour code

Red

Release characteristic

Time-lag (T)

Construction size

DI

Rated voltage

500 V

Rated current

10 A

Utilization category

gG (cable protection/equipment protection)

Logistics

Product

Net depth	50 mm
Net weight of the product	13 g
Net width	13 mm
Net height	13 mm
Stock unit of measure	pcs
EAN code for a single product	5904722904750


Basic Packaging

EAN code for a basic packaging	3838895279488
Basic packaging weight	0.136 kg
Basic Packaging Dimensions Depth	0.028 m
Basic Packaging Dimensions Height	0.053 m
Basic packaging volume	0 m ³
Basic Packaging Dimensions Width	0.068 m
Basic packaging quantity	10 pcs


Transport Packaging

Transport packaging weight	6.98 kg
Transport packaging volume	0.006 m ³
Transport packaging quantity	500 pcs
Customs tariff	85361010
Transport Packaging Dimensions Height	0.178 m
Transport Packaging Dimensions Width	0.21 m
Transport Packaging Dimensions Depth	0.17 m
EAN code for a transport packaging	3838895279495
Pallet quantity	60,000 pcs


Energy characteristic

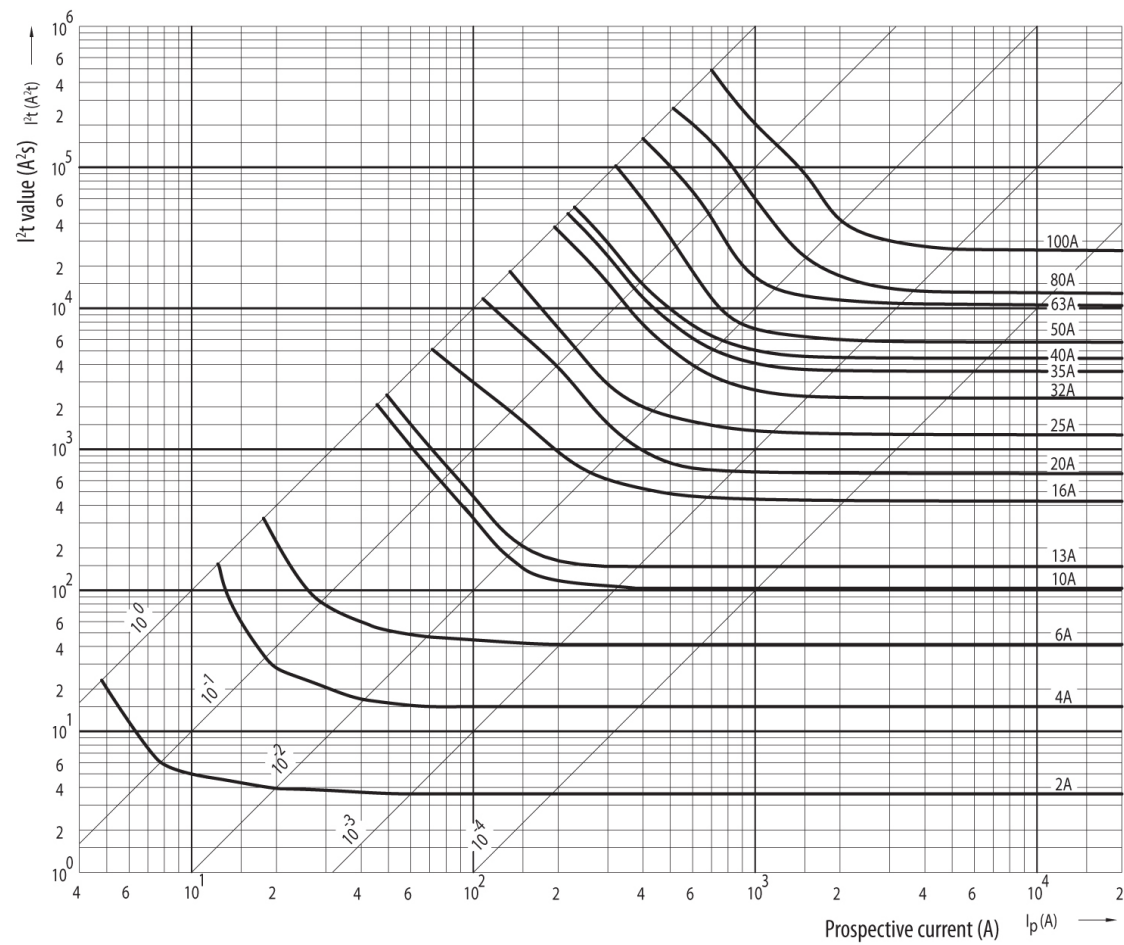


I/t characteristic

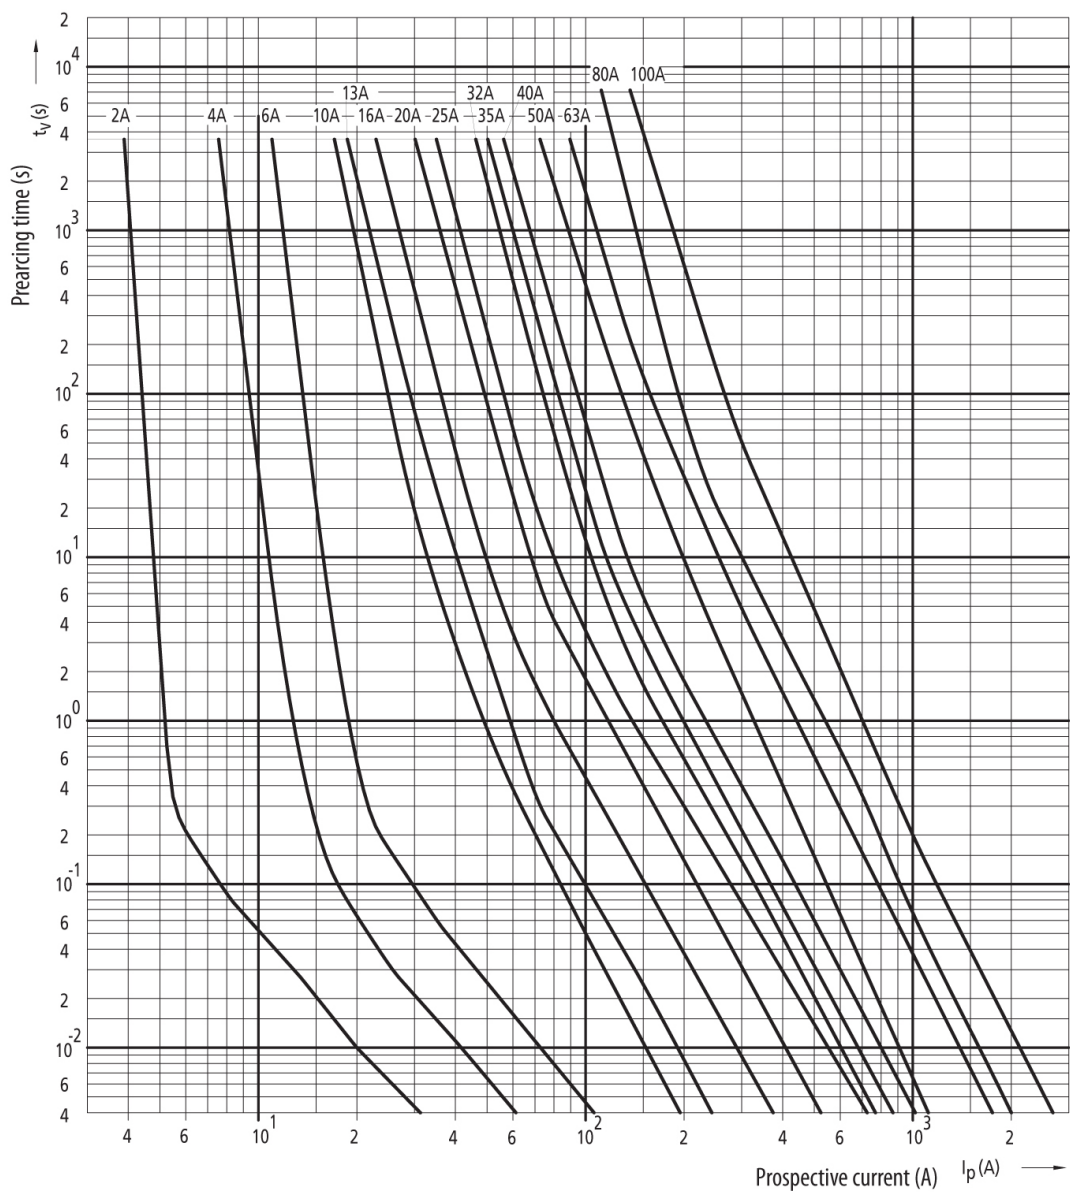

CutOff

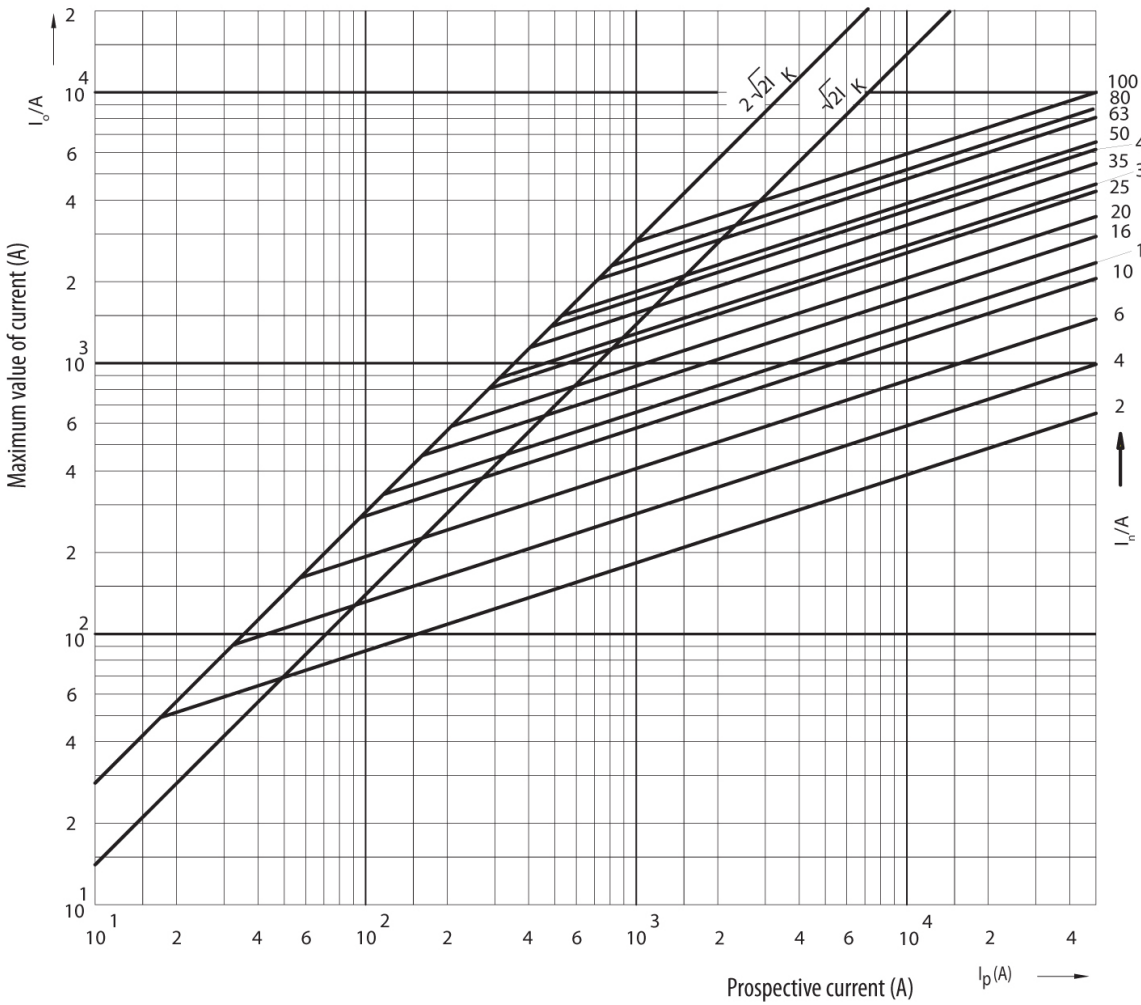

Dimension

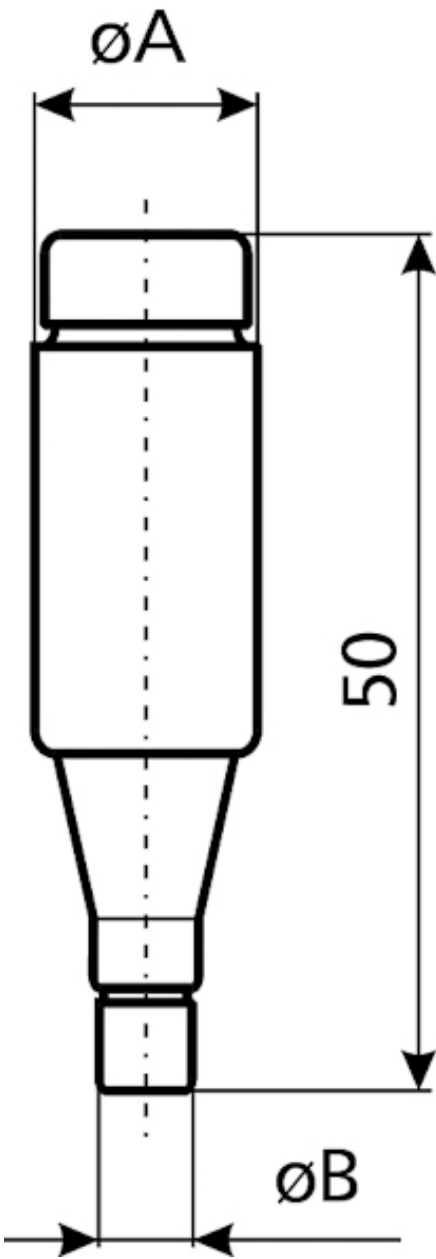

[A]	$\varnothing A$	$\varnothing B$
2	13,2	6
4	13,2	6
6	13,2	6
10	13,2	8
16	13,2	10
20	13,2	12
25	13,2	14