

SOU-1/230V+senzor

Twilight switch



ETI Code:	002470011
Type (Legacy):	Twilight switch SOU-1 + sensor
Type of Installation:	TH 35
Rated AC voltage:	230 V
Rated DC voltage:	230 V
Catalogue Group:	Twilight and staircase switches
Depth:	68 mm
Rated Frequency:	50 Hz
IP rating:	IP20
Type description:	Twilight switch SOU-1 + sensor
Catalogue Subgroup:	Twilight switch & Twilight switch sensor
Function:	Monitoring and Control relays
Supply Voltage:	230 V
Luminous flux:	1-50000 lx
Number of contacts:	1
Rated current:	16 A
Maximum load capacity at AC1:	4,000 VA
Voltage type:	AC
Category:	Twilight and staircase switches
Type of contacts:	1xCO
No. of CO contacts:	1

Online product page [🔗](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE



OM_ETIPRODUCT_DOCUMENTS_DESCRIPTION

ETIM

Built-in depth	68 mm
Max. conductor length light sensor	50 m
Adjustment range brightness value(Min)	1 lx
Degree of protection (IP)	IP20
Mounting method	DIN rail
Rated frequency(Min)	50 Hz
Rated frequency(Max)	50 Hz
Rated switch current	16 A
Protection class light sensor	II
Mounting method light sensor	Wall surface mounted
Rated voltage	230 V
Degree of protection (IP) light sensor	IP65
Max. incandescent lamp load	1,000 W
Adjustment range brightness value(Max)	50,000 lx
Push button input	Yes
Width in number of modular spacings	1

Logistics



Product

Net depth	64.09 mm
Net weight of the product	0.063 kg
Net width	17.5 mm
Net height	91.3 mm
Stock unit of measure	pcs

Transport Packaging

Transport packaging weight	0.103 kg
Transport packaging volume	0.462 dm³
Transport packaging quantity	1 pcs
Customs tariff	85364900
Transport Packaging Dimensions Height	78 mm
Transport Packaging Dimensions Width	97 mm
Transport Packaging Dimensions Depth	61 mm
EAN code for a transport packaging	8594030338360
Pallet quantity	1,920 pcs

Symbol connection

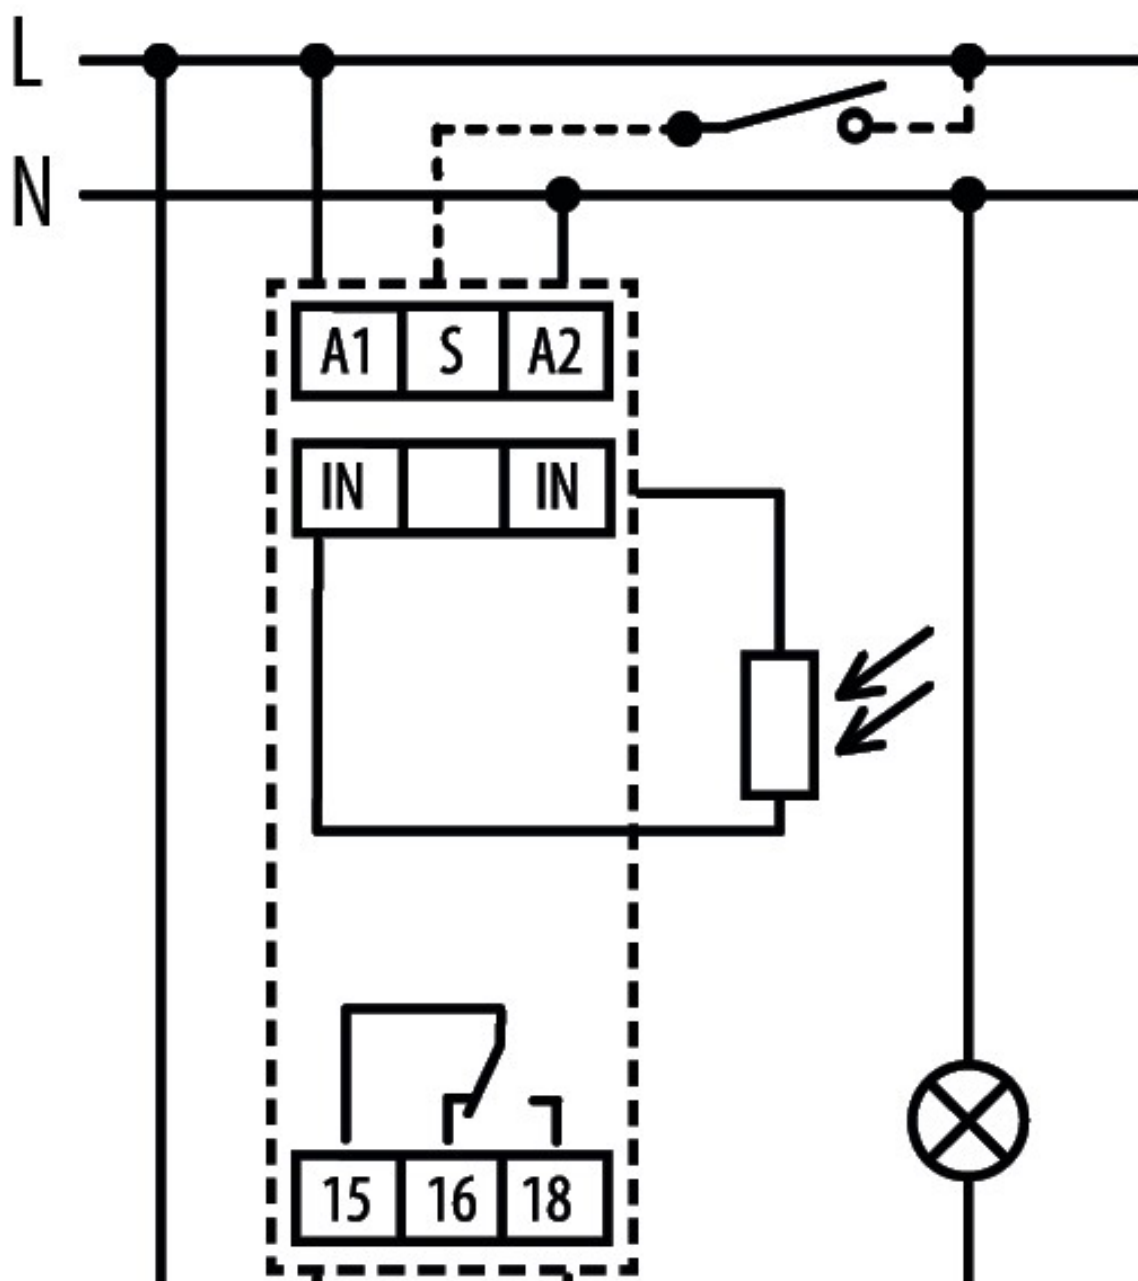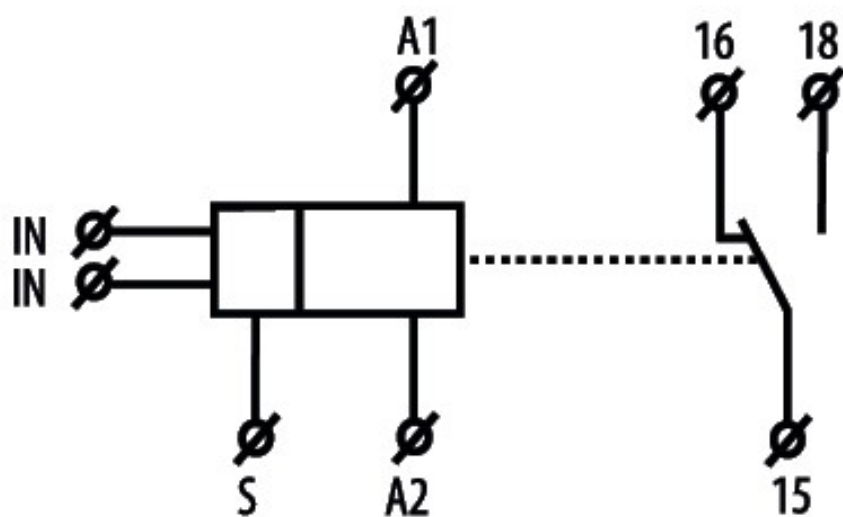



Dimension

