

CRM-4

Staircase switch



ETI Code:	002470012
Type (Legacy):	Staircase switch CRM-4
Type of Installation:	TH 35
Catalogue Group:	Twilight and staircase switches
Depth:	68 mm
Type description:	Staircase switch CRM-4
Catalogue Subgroup:	Staircase switch
Function:	Time relay
Supply Voltage:	230 V
Number of contacts:	1
Rated current:	16 A
Maximum load capacity at AC1:	4,000 VA
Voltage type:	AC
Category:	Twilight and staircase switches
No. of CO contacts:	1

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE



OM_ETIPRODUCT_DOCUMENTS_DESCRIPTION

ETIM

Built-in depth	68 mm
Control voltage 1(Max)	230 V
Release-delay(Min)	0.08 min
Mounting method	DIN rail
Supply voltage(Min)	230 V
Control voltage 1(Min)	230 V
Voltage type (supply voltage)	AC
Release-delay(Max)	10
Rated switch current	16 A
Frequency control voltage 1(Max)	60 Hz
Supply voltage(Max)	230 V
Frequency control voltage 1(Min)	50 Hz
Type of control voltage 1	AC
Function	Electronic
Width in number of modular spacings	1

Logistics

Product

Net depth	64.09 mm
Net weight of the product	0.074 kg
Net width	17.5 mm
Net height	91.3 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	8594030338247
Basic packaging weight	0.074 kg
Basic Packaging Dimensions Depth	64 mm
Basic Packaging Dimensions Height	90 mm
Basic packaging volume	0.104 dm³
Basic Packaging Dimensions Width	18 mm
Basic packaging quantity	1 pcs


Transport Packaging

Transport packaging weight	0.743 kg
Transport packaging volume	2.173 dm³
Transport packaging quantity	10 pcs
Customs tariff	85364900
Transport Packaging Dimensions Height	102 mm
Transport Packaging Dimensions Width	284 mm
Transport Packaging Dimensions Depth	75 mm
EAN code for a transport packaging	3838895231288
Pallet quantity	4,600 pcs

Dimension

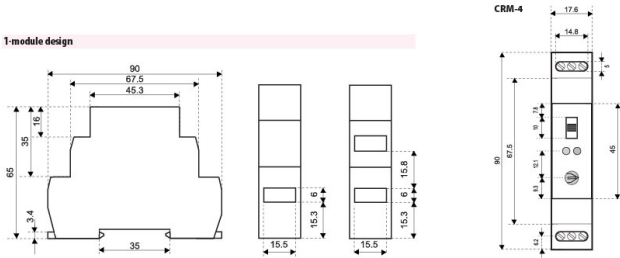

Symbol connection

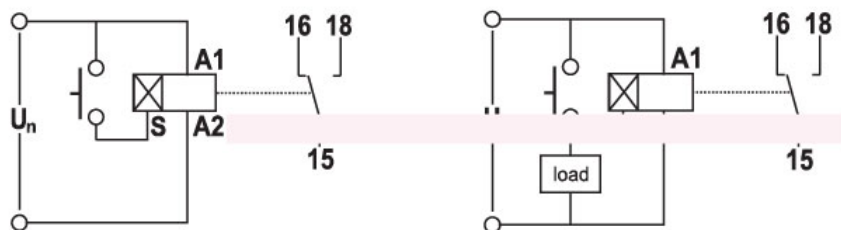

3-wire connection

4-wire connection

