


EFD 10 3p

Fuse disconnecter

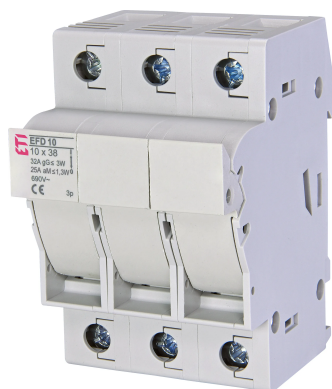

ETI Code:	002540004
Catalogue Group:	LV-fuse-switch disconnecter
To use with:	CH fuse-links
Product group:	LV-fuse-switch disconnecter
Overvoltage Category:	III
Type description:	EFD
Size:	10x38
Type of Installation:	DIN rail
Number of poles:	3
Rated AC voltage:	690 V
Utilization category:	AC-22B
Rated current:	32 A
Ambient temperature:	-5/40 °C
Max Permissible Power Dissipation per Fuse Link:	3 W
Standards:	IEC60947-1, IEC60947-3
Application:	Residential and industrial installation
IP rating:	IP20

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



CE DECLARATION



CERTIFICATE



2D FILE



3D FILE



EPLAN FILE

ETIM

Built-in depth	60 mm
For fuse size	10x38 mm
Degree of protection (IP)	IP20
Mounting method	DIN rail
Nominal voltage	690 V
Number of poles	3
Width in number of modular spacings	3

Logistics

Product

Net depth	64.4 mm
Net weight of the product	184 g
Net width	52.5 mm
Net height	82.9 mm
Stock unit of measure	pcs
EAN code for a single product	3838895744917


Basic Packaging

EAN code for a basic packaging	3838895702160
Basic packaging weight	0.792 kg
Basic Packaging Dimensions Depth	91 mm
Basic Packaging Dimensions Height	79 mm
Basic packaging volume	1.582 dm³
Basic Packaging Dimensions Width	220 mm
Basic packaging quantity	4 pcs

Transport Packaging

Transport packaging weight	7.481 kg
Transport packaging volume	0.017 m³
Transport packaging quantity	36 pcs
Customs tariff	85389099
Transport Packaging Dimensions Height	0.25 m
Transport Packaging Dimensions Width	0.235 m
Transport Packaging Dimensions Depth	0.295 m
EAN code for a transport packaging	3838895702177
Pallet quantity	1,872 pcs

Dimension

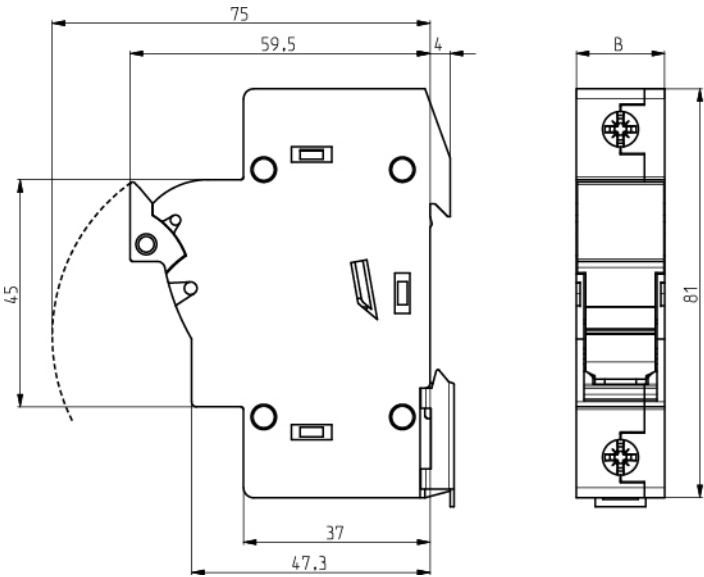

	B
EFD 8, 10 1p	17,5
EFD 8, 10 1p+N	35
EFD 8, 10 2p	35
EFD 8, 10 3p	52,5
EFD 8, 10 3p+N	70