



*CH8x32 aM 6A/400V

Fuse link

ETI Code:	002611005
Catalogue Group:	C low Voltage cylindrical fuses
Fuse type:	CH
Product group:	C low Voltage cylindrical fuses
Type description:	CH
Type (Legacy):	CH
Rated current:	6 A
Rated AC voltage:	400 V
Time-Current Characteristic:	aM
Breaking capacity AC:	50 kA
Application:	For relays, contactors and motors protection in case of short-circuit
Power dissipation:	0.4 W
Standards:	IEC 60269-1, IEC 60269-2

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Size	Other
Breaking capacity	50 kA

Logistics

Product

Net depth	8.5 mm
Net weight of the product	4.25 g
Net width	8.5 mm
Net height	32 mm
Stock unit of measure	pcs
EAN code for a single product	3838400030863


Basic Packaging

EAN code for a basic packaging	3838895171263
Basic packaging weight	0.044 kg
Basic packaging volume	0.025 dm ³
Basic packaging quantity	10 pcs


Transport Packaging

Transport packaging weight	3.48 kg
Transport packaging volume	3.386 dm ³
Transport packaging quantity	1,000 pcs
Customs tariff	85361010
EAN code for a transport packaging	3838895171270
Pallet quantity	170,000 pcs

CutOff

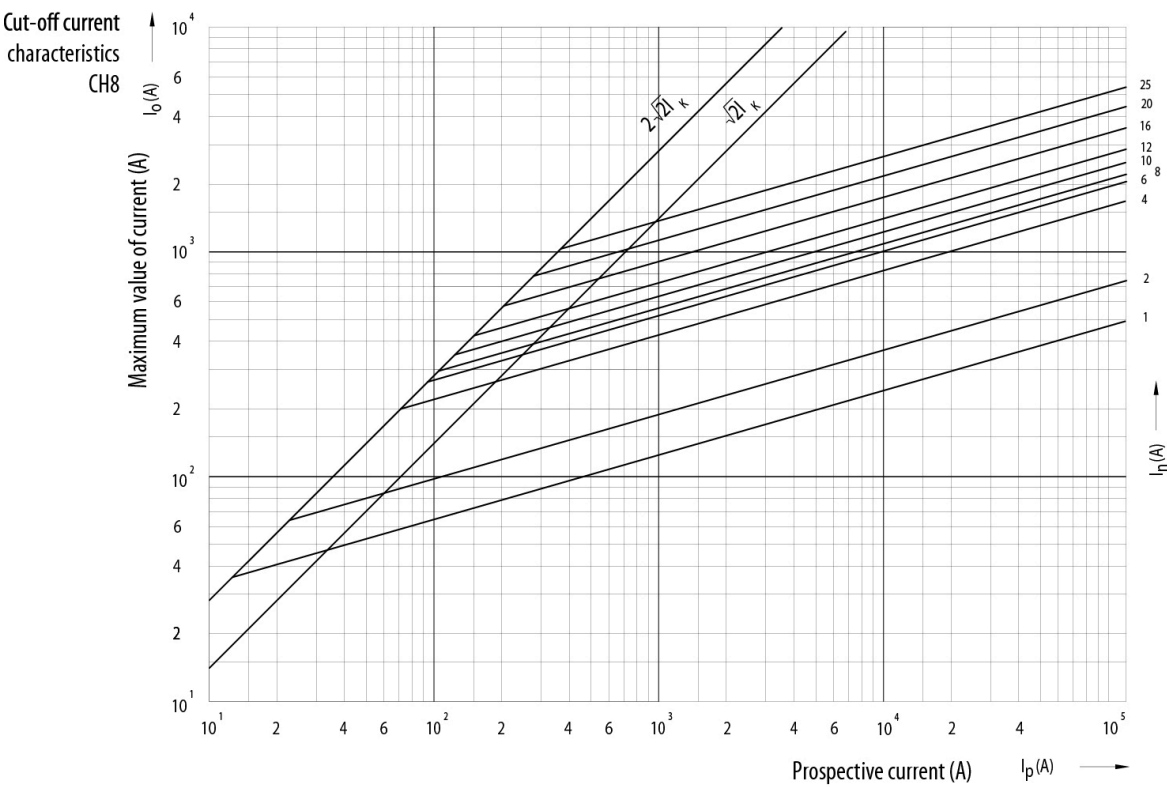

Dimension

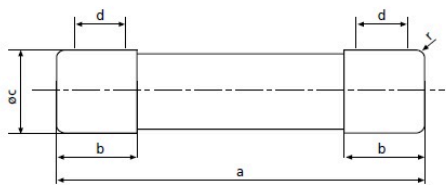

size	a	b _{max}	c	d _{min}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1

I/t characteristic

Time current characteristics I/t, CH8 aM

