



***CH8x32 aM 10A/400V**

Fuse link

ETI Code:	002611007
Catalogue Group:	C low Voltage cylindrical fuses
Fuse type:	CH
Product group:	C low Voltage cylindrical fuses
Type description:	CH
Type (Legacy):	CH
Rated current:	10 A
Rated AC voltage:	400 V
Time-Current Characteristic:	aM
Breaking capacity AC:	50 kA
Application:	For relays, contactors and motors protection in case of short-circuit
Power dissipation:	0.5 W
Standards:	IEC 60269-1, IEC 60269-2

[Online product page](#) 

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Size	Other
Breaking capacity	50 kA
Rated current	10 A
Utilization category	aM (switchgear protection)

Logistics

Product

Net depth	8.5 mm
Net weight of the product	4.25 g
Net width	8.5 mm
Net height	32 mm
Stock unit of measure	pcs
EAN code for a single product	3838895906490

Basic Packaging


EAN code for a basic packaging	3838895171300
Basic packaging weight	0.044 kg
Basic packaging volume	0.025 dm ³
Basic packaging quantity	10 pcs

Transport Packaging


Transport packaging weight	3.48 kg
Transport packaging volume	3.386 dm ³
Transport packaging quantity	1,000 pcs
Customs tariff	85361010
EAN code for a transport packaging	3838895171317
Pallet quantity	170,000 pcs

I/t characteristic


Time current characteristics I/t, CH8 aM

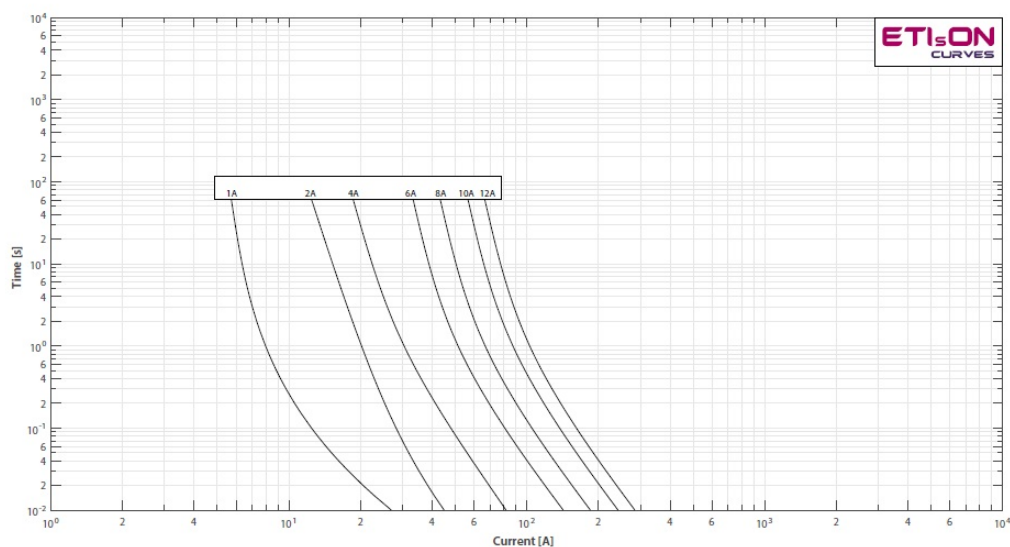

CutOff

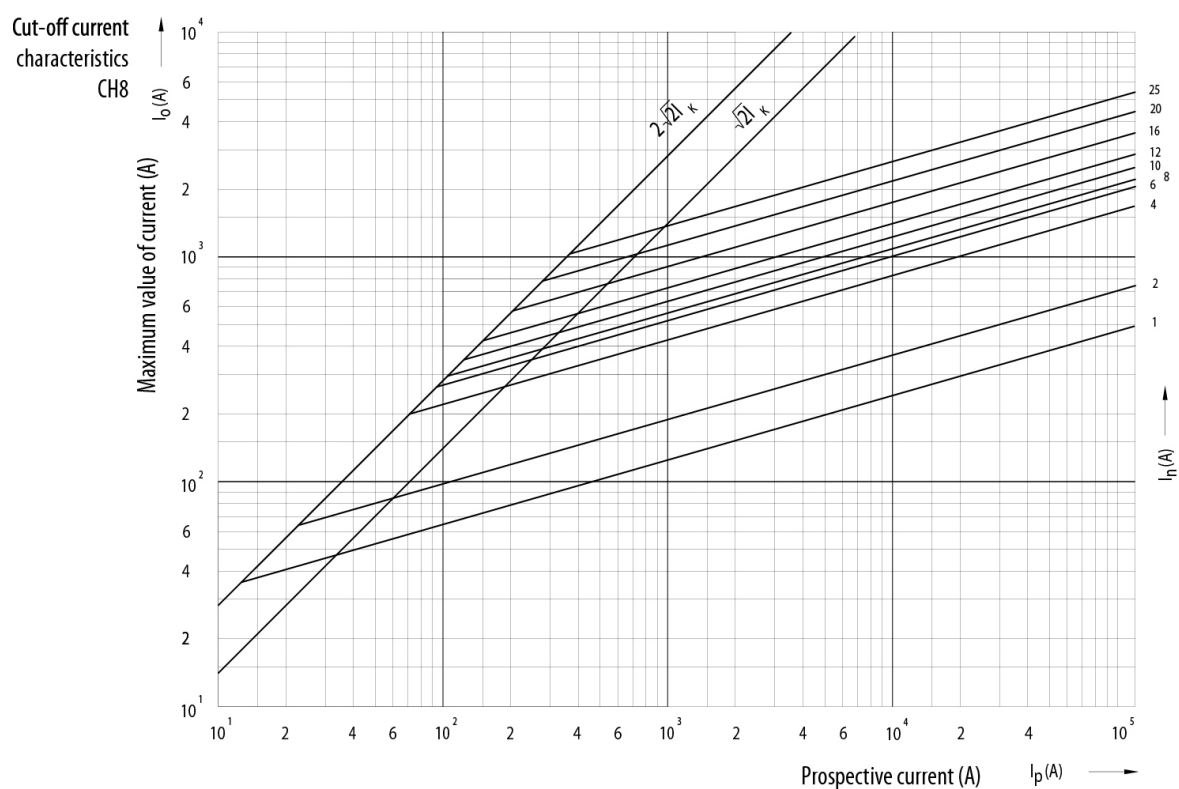

Dimension

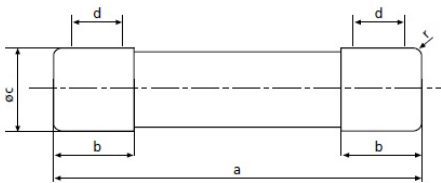

size	a	b _{max}	c	d _{min}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1