

ETIMAT P10-DC 2p C25

Miniature circuit breaker



ETI Code:	262521103
Catalogue Group:	ETIMAT P10 Miniature circuit breakers 10kA
Application:	IEC/EN 60898-2
Rated current:	25 A
Tripping characteristic:	C
Number of poles:	2
Short circuit capacity:	10 kA
Voltage type:	DC
Rated AC voltage:	440 V
Rated DC voltage:	440 V
Rated Frequency:	50/60 Hz
Rated cross section:	1-25 mm ²
Standards:	IEC/EN 60898-2
Function:	MCB

Online product page [🔗](#)

Documents



TECHNICAL DATA CATALOG



CERTIFICATE



2D FILE



3D FILE



EPLAN FILE

Logistics

Product

Net depth	74.47 mm
Net weight of the product	240 g
Net width	36 mm
Net height	90.1 mm
Stock unit of measure	pcs
EAN code for a single product	3838895686224


Basic Packaging

EAN code for a basic packaging	3838895686231
Basic packaging weight	1.464 kg
Basic Packaging Dimensions Depth	103 mm
Basic Packaging Dimensions Height	81 mm
Basic packaging volume	1.852 dm³
Basic Packaging Dimensions Width	222 mm
Basic packaging quantity	6 pcs


Transport Packaging

Transport packaging weight	7.55 kg
Transport packaging volume	11.259 dm³
Transport packaging quantity	30 pcs
Customs tariff	85362010
Transport Packaging Dimensions Height	91 mm
Transport Packaging Dimensions Width	531 mm
Transport Packaging Dimensions Depth	233 mm
EAN code for a transport packaging	3838895686248
Pallet quantity	2,520 pcs

Dimension


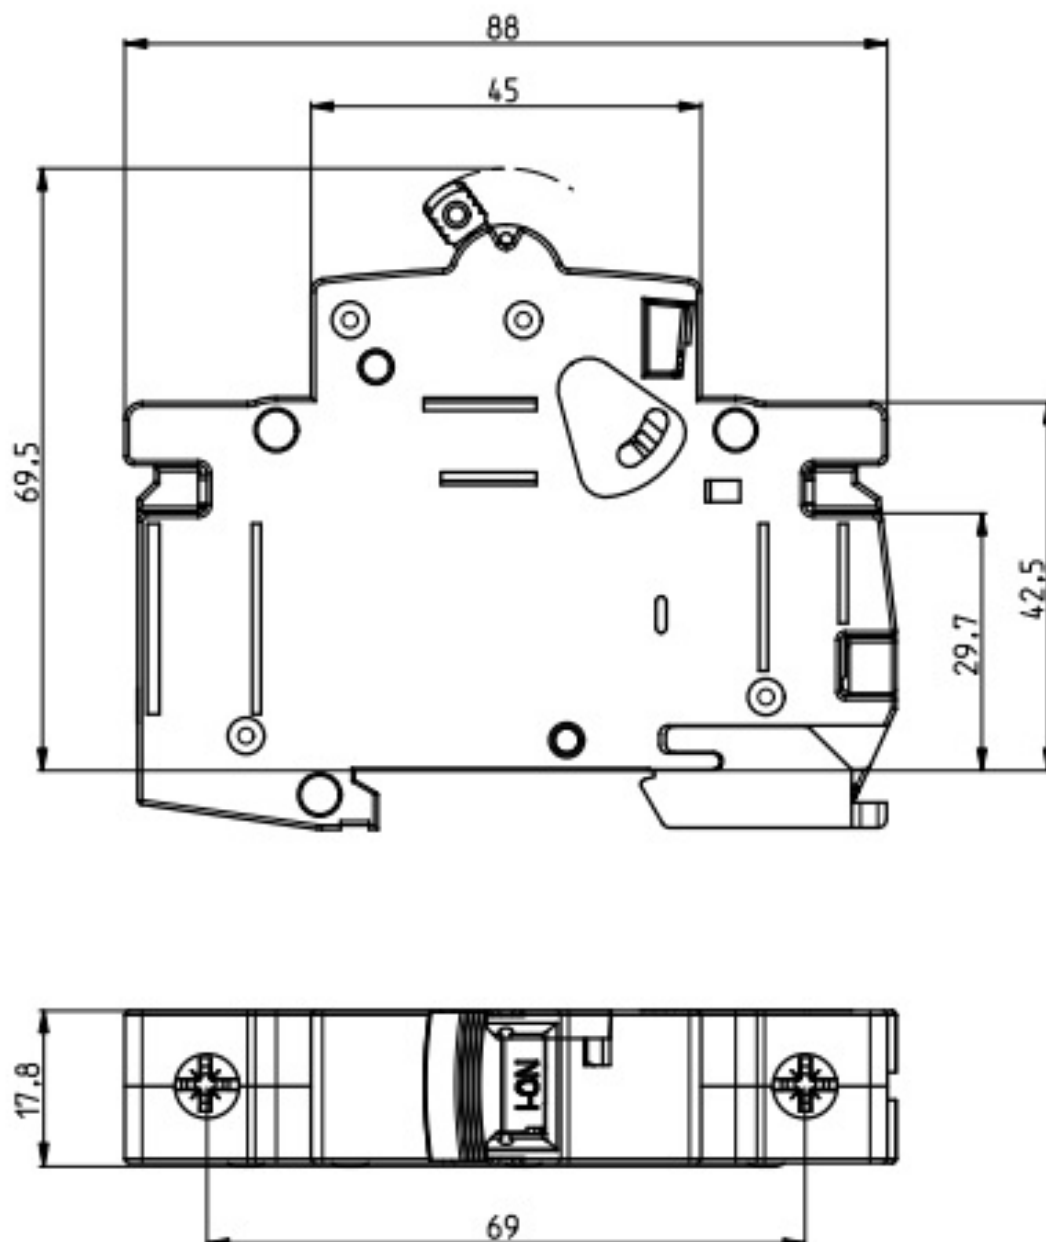


Energy characteristic

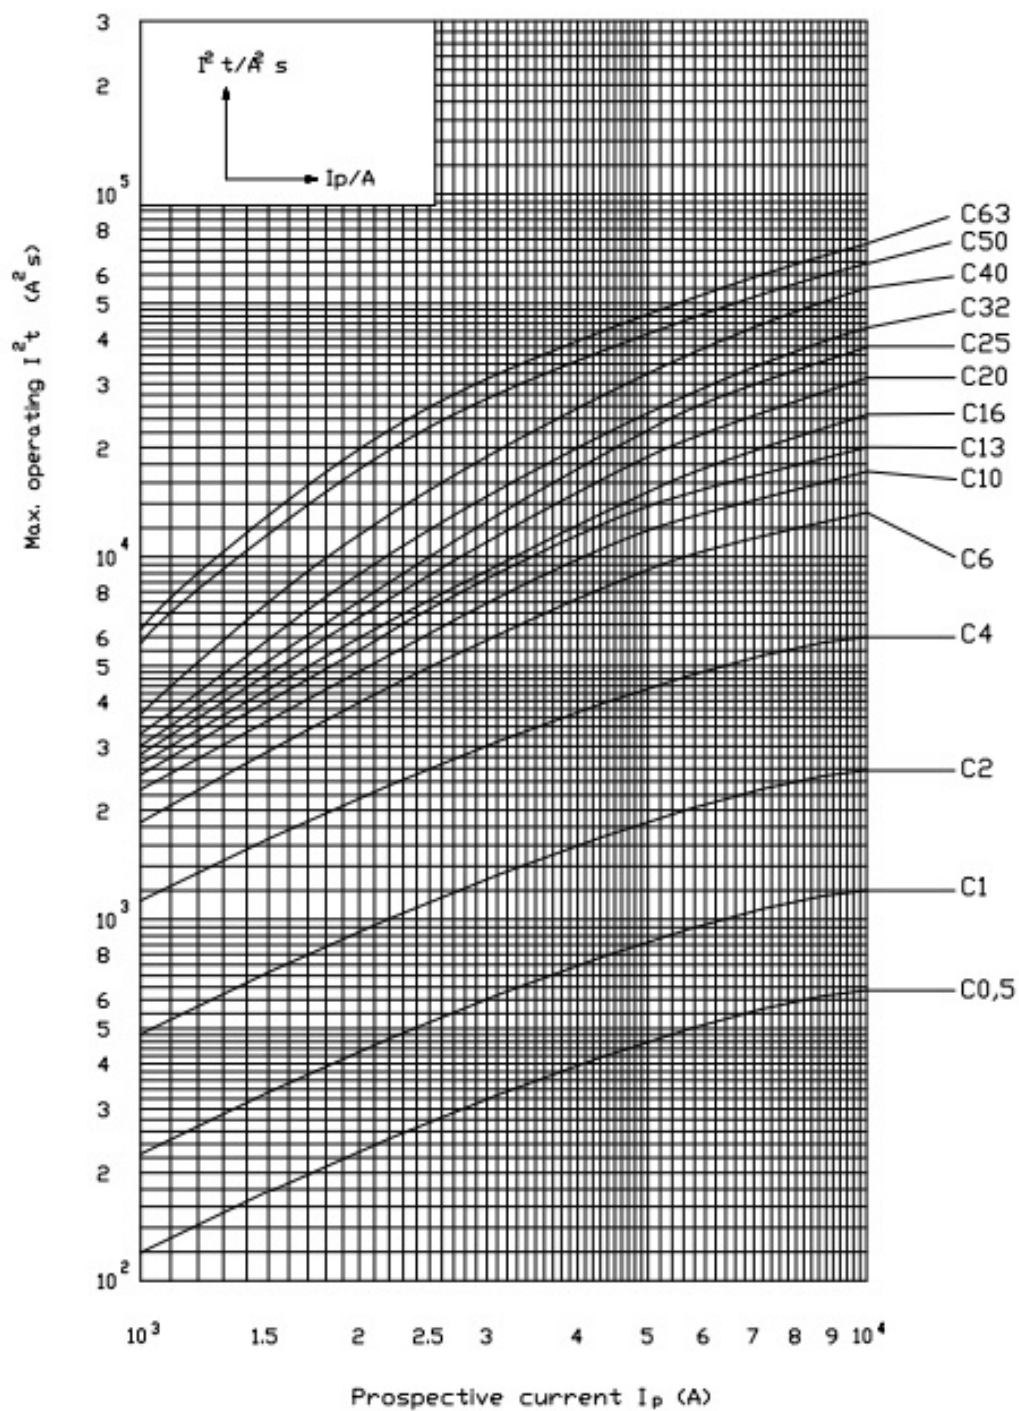

I/t characteristic

I/t characteristic at 50 and 60Hz

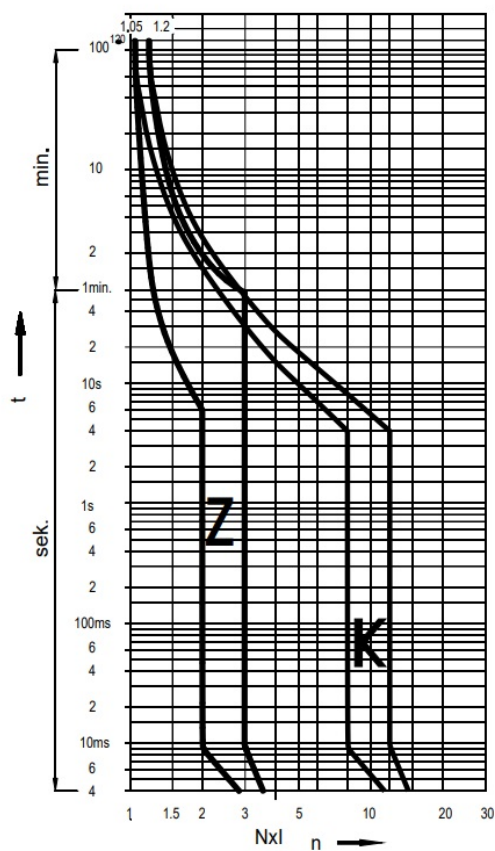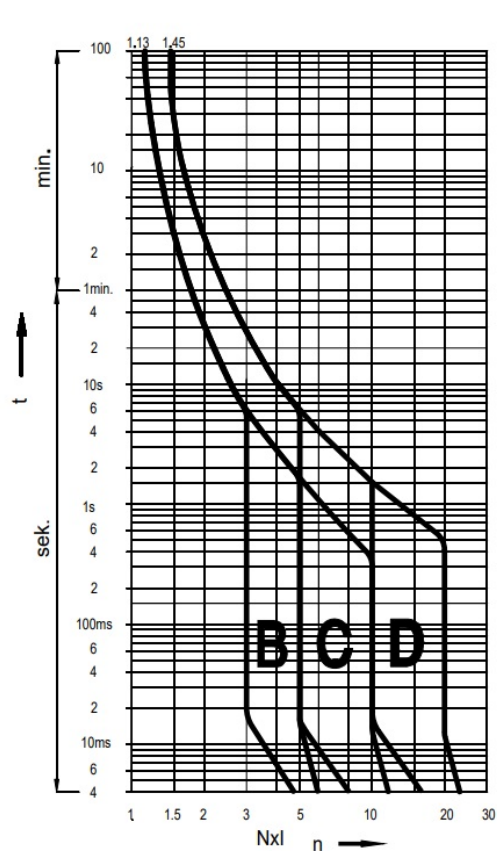

Symbol connection

1p




1p+n



2p



3p



3p+n

