



PK 0 M8-M8 1p

Fuse - base

ETI Code:	004122002
IP rating:	IP00
Type (Legacy):	PK
Size:	NH0
Number of poles:	1
Rated current:	160 A
Rated AC voltage:	690 V
Type of Installation:	Base plate mounting

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



CERTIFICATE



2D FILE



EPLAN FILE

ETIM

Construction size

NH0

Number of poles

1

Rated current

160 A

Logistics

Product

Net weight of the product	0.289 kg
Stock unit of measure	pcs
EAN code for a single product	3838400041388



Basic Packaging

EAN code for a basic packaging	3838895004387
Basic packaging weight	0.937 kg
Basic Packaging Dimensions Depth	0.197 m
Basic Packaging Dimensions Height	0.07 m
Basic packaging volume	0.002 m³
Basic Packaging Dimensions Width	0.117 m
Basic packaging quantity	3 pcs

Transport Packaging

Transport packaging weight	28.91 kg
Transport packaging volume	0.03 m³
Transport packaging quantity	90 pcs
Customs tariff	85389099
Transport Packaging Dimensions Height	0.215 m
Transport Packaging Dimensions Width	0.37 m
Transport Packaging Dimensions Depth	0.375 m
EAN code for a transport packaging	3838895161493
Pallet quantity	1,800 pcs

Dimension

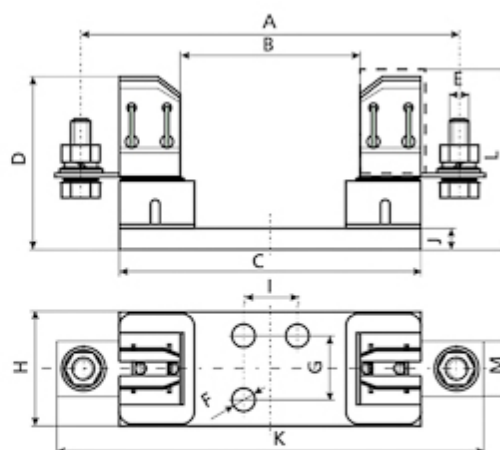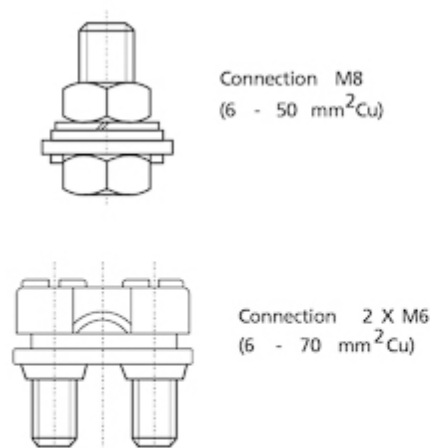

1-pole bases PK and PKI

type	dimension													
	A	B	C	D	E	F	G	H	I	J	K	L	M	
PK 00 M8 - 2 x M6	100	57	84	60	M8 - 2 x M6	Ø7,5			25	4,5	115		20	
PK 00 M8 - M8	100	57	84	60	M8 - M8	Ø7,5			25	4,5	115		20	
PK 00 2 x M6 - 2xM6	100	57	84	60	2 x M6 - 2 x M6	Ø7,5			25	4,5	115		20	
PK 0 M8 - 2 x M6	150	74	130	60	M8 - 2 x M6	Ø7,5		33	25	4,5	170		20	
PK 0 M8 - M8	150	74	130	60	M8 - M8	Ø7,5		33	25	4,5	170		20	
PK 02 x M6 - 2 x M6	150	74	130	60	M8 - 2 x M6	Ø7,5		33	25	4,5	170		20	
PK 1	175	80	141	81	M10	Ø10,5	30	55	25	10	200		26	
PK 2	200	80	166	102	M10	Ø10,5	30	65	25	10	225		30	
PK 3	210	80	166	102	M12	Ø10,5	30	65	25	10	240		30	
PK 4	270	100	220	143	M12	Ø13	30	102	25	12	310		50	
PKI 1	175	80	141	81	M10	Ø10,5	30	55	25	10	200	87	26	
PKI 2	200	80	166	102	M10	Ø10,5	30	65	25	10	225	98	30	
PKI 3	210	80	166	102	M12	Ø10,5	30	65	25	10	240	108	30	
PK 1/1000V	193	100	160	81	M10	Ø10,5	30	55	25	10	220		26	

Insulating sleeves are installed with bases PKI, PPI; their purpose is an additional protection against shock hazard.