

PK 00 M8-M8 1p S

Fuse - base



ETI Code:	004123000
IP rating:	IP00
Type description:	PK
Type (Legacy):	PK
Size:	NH00
Number of poles:	1
Rated current:	160 A
Rated AC voltage:	690 V
Breaking capacity AC:	200 kA
Type of Installation:	Base plate mounting
Overvoltage Category:	III
Standards:	IEC 60269-2
Ambient temperature:	-25/55 °C
Conventional free air thermal current with fuse links:	160 A
Conventional free air thermal current with solid links:	200 A
Max Permissible Power Dissipation per Fuse Link:	12 W
Rated operating mode:	uninterrupted
Pollution Degree:	3
Rated Frequency:	40/60 Hz

Online product page [🔗](#)

Documents



TECHNICAL DATA CATALOG



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Construction size

NH00

Number of poles

1

Rated current

160 A

Logistics

Product

Net depth	58.5 mm
Net weight of the product	0.173 kg
Net width	30 mm
Net height	119 mm
Stock unit of measure	pcs
EAN code for a single product	3838895906698


Basic Packaging

EAN code for a basic packaging	3838895756057
Basic packaging weight	0.579 kg
Basic Packaging Dimensions Depth	0.135 m
Basic Packaging Dimensions Height	0.07 m
Basic packaging volume	0.001 m³
Basic Packaging Dimensions Width	0.11 m
Basic packaging quantity	3 pcs

Transport Packaging

Transport packaging weight	14.93 kg
Transport packaging volume	0.035 m³
Transport packaging quantity	75 pcs
Customs tariff	85389099
Transport Packaging Dimensions Height	0.285 m
Transport Packaging Dimensions Width	0.343 m
Transport Packaging Dimensions Depth	0.363 m
EAN code for a transport packaging	3838895756064
Pallet quantity	600 pcs

Dimension

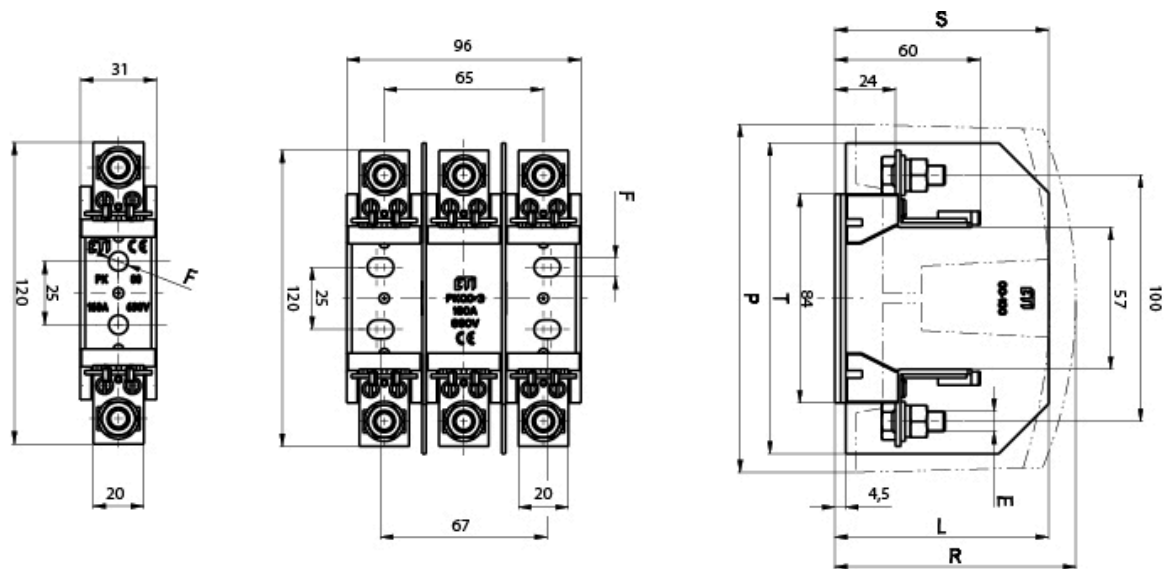

1-p	3-p	E	F	L	P	R	S*	T*
PK 00 M8-M8 1p S	PK 00 M8-M8 3p S	M8-M8	Ø 7,5	\	\	\	88	126
PK 00 2M6-2M6 1p S	PK 00 2M6-2M6 3p S	2M6-2M6	Ø 7,5	\	\	\	88	126
PK 00 M8-2M6 1p S	PK 00 M8-2M6 3p S	M8-2M6	Ø 7,5	\	\	\	88	126
PK 00 M8-P00 1p S	PK 00 M8-P00 3p S	M8-P00	Ø 7,5	\	\	\	88	126
PK 00 M8-2P00 1p S	PK 00 M8-2P00 3p S	M8-2P00	Ø 7,5	\	\	\	88	126
PK 00 P00-P00 1p S	PK 00 P00-P00 3p S	P00-P00	Ø 7,5	\	\	\	88	126
PK 00 P00-2P00 1p S	PK 00 P00-2P00 3p S	P00-2P00	Ø 7,5	\	\	\	88	126
PK 00 2P00-2P00 1p S	PK 00 2P00-2P00 3p S	2P00-2P00	Ø 7,5	\	\	\	88	126
PKI 00 M8-M8 1p S	PKI 00 M8-M8 3p S	M8-M8	Ø 7,5	87	140	\	\	\
PKI 00 2M6-2M6 1p S	PKI 00 2M6-2M6 3p S	2M6-2M6	Ø 7,5	87	140	\	\	\
PKI 00 M8-2M6 1p S	PKI 00 M8-2M6 3p S	M8-2M6	Ø 7,5	87	140	\	\	\
PKI 00 M8-P00 1p S	PKI 00 M8-P00 3p S	M8-P00	Ø 7,5	87	140	\	\	\
PKI 00 M8-2P00 1p S	PKI 00 M8-2P00 3p S	M8-2P00	Ø 7,5	87	140	\	\	\
PKI 00 P00-P00 1p S	PKI 00 P00-P00 3p S	P00-P00	Ø 7,5	87	140	\	\	\
PKI 00 P00-2P00 1p S	PKI 00 P00-2P00 3p S	P00-2P00	Ø 7,5	87	140	\	\	\
PKI 00 2P00-2P00 1p S	PKI 00 2P00-2P00 3p S	2P00-2P00	Ø 7,5	87	140	\	\	\
PKIP 00 M8-M8 1p S	PKIP 00 M8-M8 3p S	M8-M8	Ø 7,5	87	140	95	\	\
PKIP 00 2M6-2M6 1p S	PKIP 00 2M6-2M6 3p S	2M6-2M6	Ø 7,5	87	140	95	\	\
PKIP 00 M8-2M6 1p S	PKIP 00 M8-2M6 3p S	M8-2M6	Ø 7,5	87	140	95	\	\
PKIP 00 M8-P00 1p S	PKIP 00 M8-P00 3p S	M8-P00	Ø 7,5	87	140	95	\	\
PKIP 00 M8-2P00 1p S	PKIP 00 M8-2P00 3p S	M8-2P00	Ø 7,5	87	140	95	\	\
PKIP 00 P00-P00 1p S	PKIP 00 P00-P00 3p S	P00-P00	Ø 7,5	87	140	95	\	\
PKIP 00 P00-2P00 1p S	PKIP 00 P00-2P00 3p S	P00-2P00	Ø 7,5	87	140	95	\	\
PKIP 00 2P00-2P00 1p S	PKIP 00 2P00-2P00 3p S	2P00-2P00	Ø 7,5	87	140	95	\	\