

PK 00 M8-M8 3p S

Fuse - base



ETI Code:	004132100
IP rating:	IP00
Type description:	PK
Type (Legacy):	PK
Size:	NH00
Number of poles:	3
Rated current:	160 A
Rated AC voltage:	690 V
Breaking capacity AC:	200 kA
Type of Installation:	Base plate mounting
Overvoltage Category:	III
Standards:	IEC 60269-2
Ambient temperature:	-25/55 °C
Conventional free air thermal current with fuse links:	160 A
Conventional free air thermal current with solid links:	200 A
Max Permissible Power Dissipation per Fuse Link:	12 W
Rated operating mode:	uninterrupted
Pollution Degree:	3
Rated Frequency:	40/60 Hz

Online product page [🔗](#)

Documents



TECHNICAL DATA CATALOG



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Construction size

NH00

Number of poles

3

Rated current

160 A

Logistics

Product

Net depth	88 mm
Net weight of the product	0.558 kg
Net width	94 mm
Net height	126 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	3838895772200
Basic packaging weight	1.358 kg
Basic Packaging Dimensions Depth	0.157 m
Basic Packaging Dimensions Height	0.102 m
Basic packaging volume	0.002 m³
Basic Packaging Dimensions Width	0.119 m
Basic packaging quantity	1 pcs

Transport Packaging

Transport packaging weight	20.825 kg
Transport packaging volume	0.035 m³
Transport packaging quantity	15 pcs
Customs tariff	85389099
Transport Packaging Dimensions Height	0.285 m
Transport Packaging Dimensions Width	0.343 m
Transport Packaging Dimensions Depth	0.363 m
EAN code for a transport packaging	3838895772217
Pallet quantity	270 pcs

Dimension

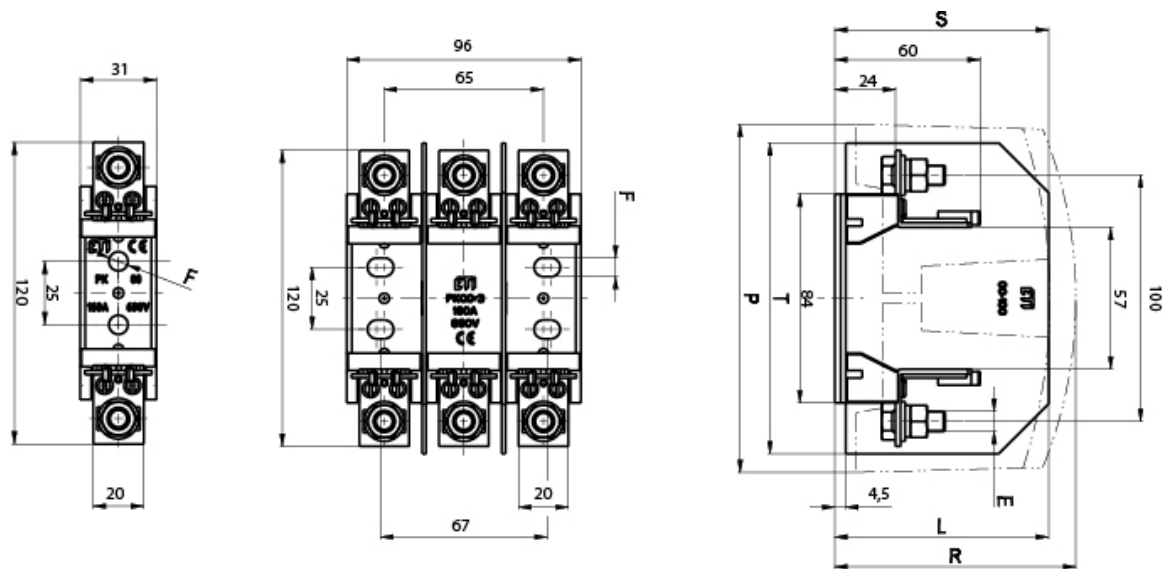

1-p	3-p	E	F	L	P	R	S*	T*
PK 00 M8-M8 1p S	PK 00 M8-M8 3p S	M8-M8	Ø 7,5	\	\	\	88	126
PK 00 2M6-2M6 1p S	PK 00 2M6-2M6 3p S	2M6-2M6	Ø 7,5	\	\	\	88	126
PK 00 M8-2M6 1p S	PK 00 M8-2M6 3p S	M8-2M6	Ø 7,5	\	\	\	88	126
PK 00 M8-P00 1p S	PK 00 M8-P00 3p S	M8-P00	Ø 7,5	\	\	\	88	126
PK 00 M8-2P00 1p S	PK 00 M8-2P00 3p S	M8-2P00	Ø 7,5	\	\	\	88	126
PK 00 P00-P00 1p S	PK 00 P00-P00 3p S	P00-P00	Ø 7,5	\	\	\	88	126
PK 00 P00-2P00 1p S	PK 00 P00-2P00 3p S	P00-2P00	Ø 7,5	\	\	\	88	126
PK 00 2P00-2P00 1p S	PK 00 2P00-2P00 3p S	2P00-2P00	Ø 7,5	\	\	\	88	126
PKI 00 M8-M8 1p S	PKI 00 M8-M8 3p S	M8-M8	Ø 7,5	87	140	\	\	\
PKI 00 2M6-2M6 1p S	PKI 00 2M6-2M6 3p S	2M6-2M6	Ø 7,5	87	140	\	\	\
PKI 00 M8-2M6 1p S	PKI 00 M8-2M6 3p S	M8-2M6	Ø 7,5	87	140	\	\	\
PKI 00 M8-P00 1p S	PKI 00 M8-P00 3p S	M8-P00	Ø 7,5	87	140	\	\	\
PKI 00 M8-2P00 1p S	PKI 00 M8-2P00 3p S	M8-2P00	Ø 7,5	87	140	\	\	\
PKI 00 P00-P00 1p S	PKI 00 P00-P00 3p S	P00-P00	Ø 7,5	87	140	\	\	\
PKI 00 P00-2P00 1p S	PKI 00 P00-2P00 3p S	P00-2P00	Ø 7,5	87	140	\	\	\
PKI 00 2P00-2P00 1p S	PKI 00 2P00-2P00 3p S	2P00-2P00	Ø 7,5	87	140	\	\	\
PKIP 00 M8-M8 1p S	PKIP 00 M8-M8 3p S	M8-M8	Ø 7,5	87	140	95	\	\
PKIP 00 2M6-2M6 1p S	PKIP 00 2M6-2M6 3p S	2M6-2M6	Ø 7,5	87	140	95	\	\
PKIP 00 M8-2M6 1p S	PKIP 00 M8-2M6 3p S	M8-2M6	Ø 7,5	87	140	95	\	\
PKIP 00 M8-P00 1p S	PKIP 00 M8-P00 3p S	M8-P00	Ø 7,5	87	140	95	\	\
PKIP 00 M8-2P00 1p S	PKIP 00 M8-2P00 3p S	M8-2P00	Ø 7,5	87	140	95	\	\
PKIP 00 P00-P00 1p S	PKIP 00 P00-P00 3p S	P00-P00	Ø 7,5	87	140	95	\	\
PKIP 00 P00-2P00 1p S	PKIP 00 P00-2P00 3p S	P00-2P00	Ø 7,5	87	140	95	\	\
PKIP 00 2P00-2P00 1p S	PKIP 00 2P00-2P00 3p S	2P00-2P00	Ø 7,5	87	140	95	\	\