

PK 3 M12-M12 3p S

Fuse - base



ETI Code:	004132400
IP rating:	IP00
Type description:	PK
Type (Legacy):	PK
Size:	NH3
Number of poles:	3
Rated current:	630 A
Rated AC voltage:	690 V
Breaking capacity AC:	200 kA
Type of Installation:	Base plate mounting
Overvoltage Category:	III
Standards:	IEC 60269-2
Ambient temperature:	-25/55 °C
Conventional free air thermal current with fuse links:	630 A
Conventional free air thermal current with solid links:	800 A
Max Permissible Power Dissipation per Fuse Link:	60 W
Rated operating mode:	uninterrupted
Pollution Degree:	3
Rated Frequency:	40/60 Hz

Online product page [🔗](#)

Documents



TECHNICAL DATA CATALOG



CE DECLARATION



CERTIFICATE



2D FILE



3D FILE



EPLAN FILE

ETIM

Construction size

NH3

Number of poles

3

Rated current

630 A

Logistics

Product

Net depth	129 mm
Net weight of the product	3.318 kg
Net width	208.7 mm
Net height	266.1 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	3838895777212
Basic packaging weight	3.485 kg
Basic Packaging Dimensions Depth	225 mm
Basic Packaging Dimensions Height	135 mm
Basic packaging volume	8.049 dm³
Basic Packaging Dimensions Width	265 mm
Basic packaging quantity	1 pcs

Transport Packaging

Transport packaging weight	14.74 kg
Transport packaging volume	0.03 m³
Transport packaging quantity	4 pcs
Customs tariff	85389099
Transport Packaging Dimensions Height	0.215 m
Transport Packaging Dimensions Width	0.37 m
Transport Packaging Dimensions Depth	0.375 m
EAN code for a transport packaging	3838895777229
Pallet quantity	36 pcs

Dimension

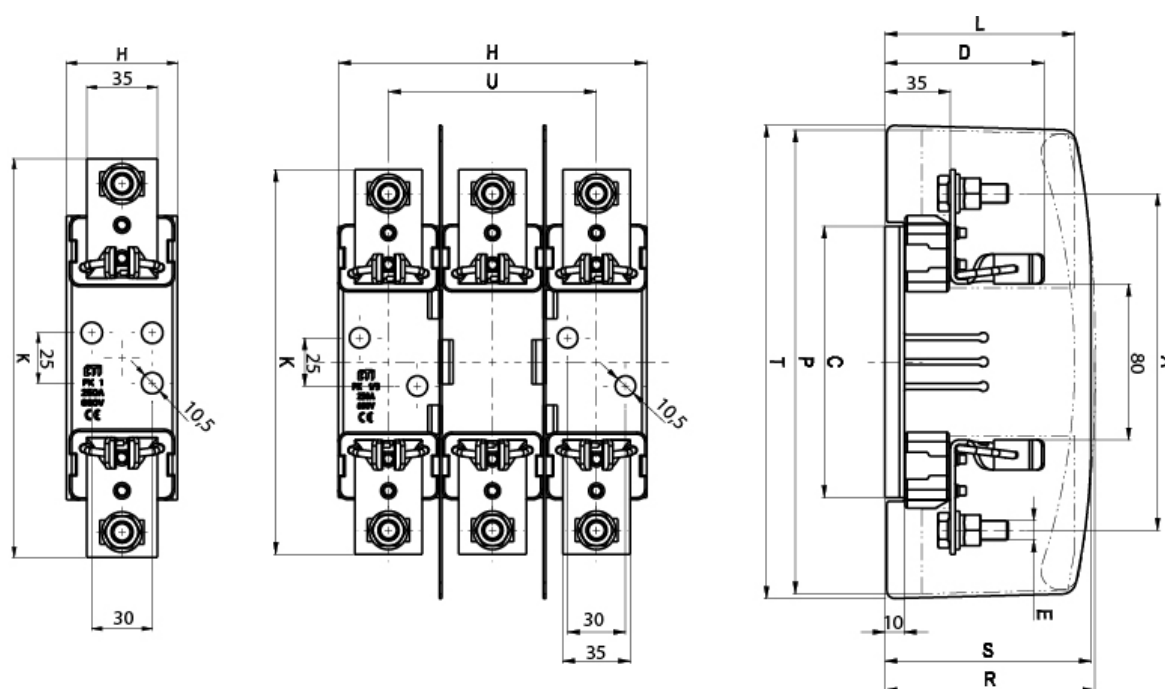

1-pole	3-pole	A	C	D	E	H - 1p	H - 3p	K	L**	P**	R**	S*	T*	U
PK 1 M10-M10 1p S	PK 1 M10-M10 3p S	175	141	82	M10-M10	55,5	160	200	108	245	113	108	245	106
PK 1 M10-S12 1p S	PK 1 M10-S12 3p S	175	141	82	M10-S12	55,5	160	200	108	245	113	108	245	106
PK 1 S12-S12 1p S	PK 1 S12-S12 3p S	175	141	82	S12-S12	55,5	160	200	108	245	113	108	245	106
PK 1 M10-P1 1p S	PK 1 M10-P1 3p S	175	141	82	M10-P1	55,5	160	200	108	245	113	108	245	106
PK 1 M10-2P1 1p S	PK 1 M10-2P1 3p S	175	141	82	M10-2P1	55,5	160	200	108	245	113	108	245	106
PK 1 P1-P1 1p S	PK 1 P1-P1 3p S	175	141	82	P1-P1	55,5	160	200	108	245	113	108	245	106
PK 1 P1-2P1 1p S	PK 1 P1-2P1 3p S	175	141	82	P1-2P1	55,5	160	200	108	245	113	108	245	106
PK 1 2P1-2P1 1p S	PK 1 2P1-2P1 3p S	175	141	82	2P1-2P1	55,5	160	200	108	245	113	108	245	106
PK 2 M10-M10 1p S	PK 2 M10-M10 3p S	200	166	87	M10-M10	65	185	225	115	266	125	117	266	125
PK 2 M10-S12 1p S	PK 2 M10-S12 3p S	200	166	87	M10-S12	65	185	225	115	266	125	117	266	125
PK 2 S12-S12 1p S	PK 2 S12-S12 3p S	200	166	87	S12-S12	65	185	225	115	266	125	117	266	125
PK 2 M10-P2 1p S	PK 2 M10-P2 3p S	200	166	87	M10-P2	65	185	225	115	266	125	117	266	125
PK 2 M10-2P2 1p S	PK 2 M10-2P2 3p S	200	166	87	M10-2P2	65	185	225	115	266	125	117	266	125
PK 2 P2-P2 1p S	PK 2 P2-P2 3p S	200	166	87	P2-P2	65	185	225	115	266	125	117	266	125
PK 2 P2-2P2 1p S	PK 2 P2-2P2 3p S	200	166	87	P2-2P2	65	185	225	115	266	125	117	266	125
PK 2 2P2-2P2 1p S	PK 2 2P2-2P2 3p S	200	166	87	2P2-2P2	65	185	225	115	266	125	117	266	125
PK 3 M12-M12 1p S	PK 3 M12-M12 3p S	210	166	99	M12-M12	65	208	240	127	266	135	130	266	148
PK 3 M12-P3 1p S	PK 3 M12-P3 3p S	210	166	99	M12-P3	65	208	240	127	266	135	130	266	148
PK 3 M12-2P3 1p S	PK 3 M12-2P3 3p S	210	166	99	M12-2P3	65	208	240	127	266	135	130	266	148
PK 3 P3-P3 1p S	PK 3 P3-P3 3p S	210	166	99	P3-P3	65	208	240	127	266	135	130	266	148
PK 3 P3-2P3 1p S	PK 3 P3-2P3 3p S	210	166	99	P3-2P3	65	208	240	127	266	135	130	266	148
PK 3 2P3-2P3 1p S	PK 3 2P3-2P3 3p S	210	166	99	2P3-2P3	65	208	240	127	266	135	130	266	148