

VVC3 7,2kV/100A

Fuse link

ETI Code:	004220017
Type description:	NEW VVC 50N striker
Breaking capacity AC:	63 kA
Rated minimum breaking current:	360 A
Rated AC voltage:	7200 V
Cold resistance:	4.8 mΩ
Rated current:	100 A
Power dissipation:	73 W
Fuse type:	NEW VVC 50N striker
Size:	192
Indicator:	50N striker force
Type (Legacy):	NEW VVC 50N striker

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



2D FILE



3D FILE



EPLAN FILE

ETIM

Performance category according to IEC 60282-1

Voltage type

Application

With striker

Installation technique

Rated frequency(Min)

Standard

Rated frequency(Max)

Length

Breaking capacity

Diameter

Rated voltage

Rated current

Utilization category

Back-up

AC

Other

Yes

Air

45 Hz

IEC

60 Hz

192 mm

63 kA

83.5 mm

7.2 kV

100 A

Other

Logistics


Product

Net depth	86.6 mm
Net weight of the product	2.62 kg
Net width	86.6 mm
Net height	258 mm
Stock unit of measure	pcs
EAN code for a single product	3838895914501


Transport Packaging

Transport packaging weight	8.27 kg
Transport packaging volume	0.017 m³
Transport packaging quantity	3 pcs
Customs tariff	85351000
Transport Packaging Dimensions Height	0.12 m
Transport Packaging Dimensions Width	0.41 m
Transport Packaging Dimensions Depth	0.35 m
EAN code for a transport packaging	3838895914518
Pallet quantity	108 pcs

CutOff

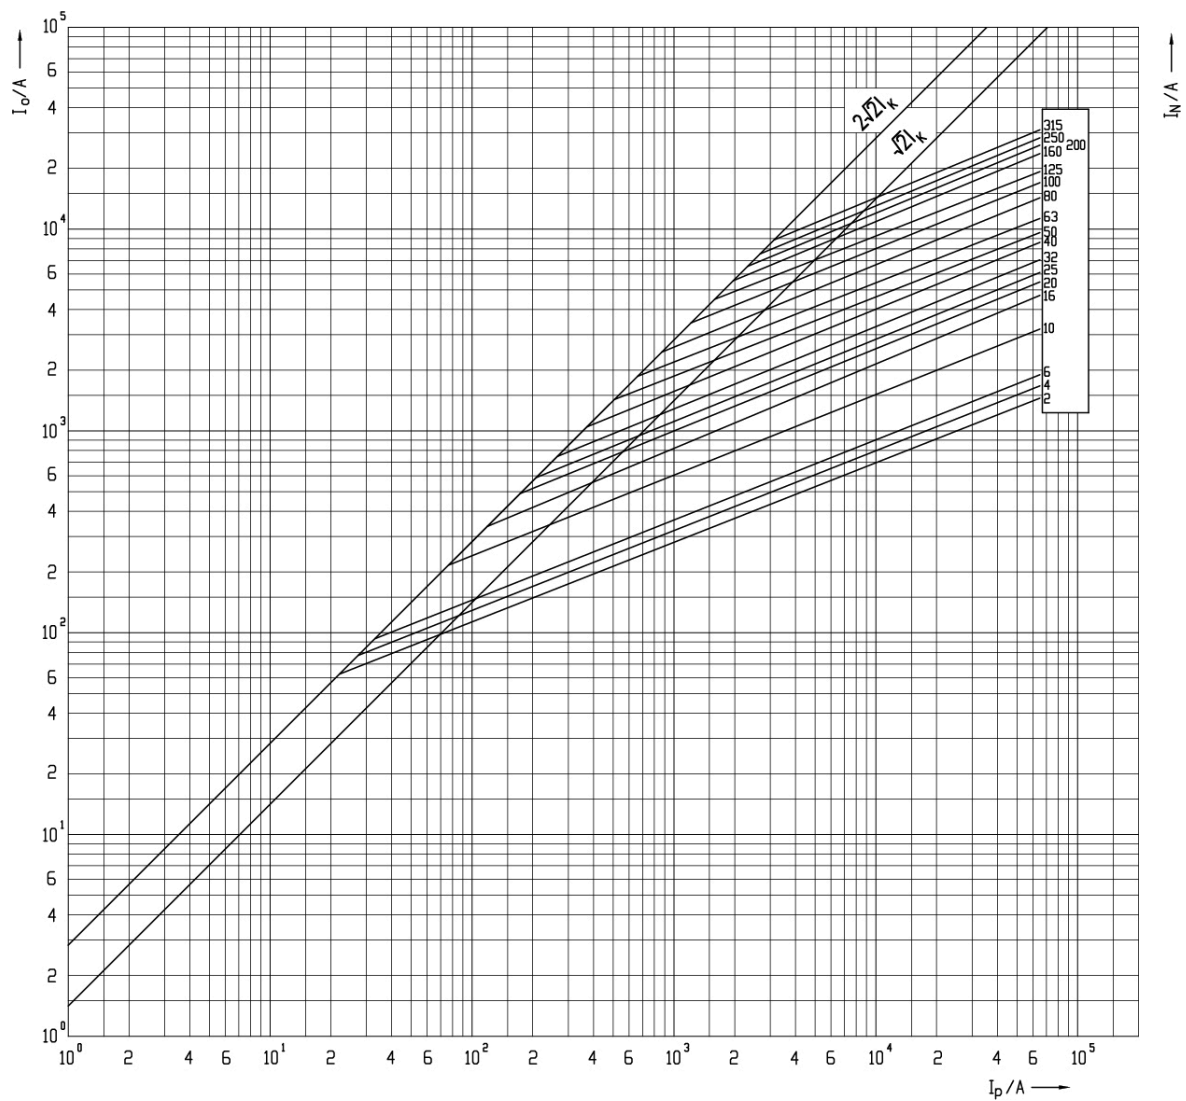

Dimension

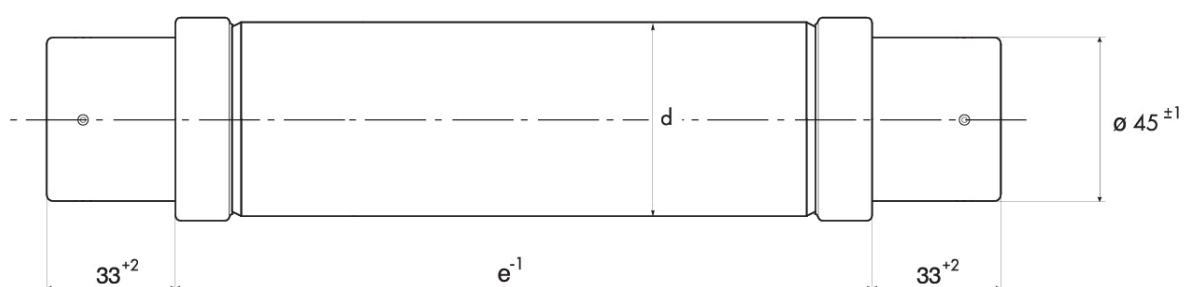

I/t characteristic

