

DII UQ gR 25A/500V

Fuse link



ETI Code:	004322007
Catalogue Group:	Semiconductor Protection
Application:	For protection of semiconductor devices
Product group:	Semiconductor Protection
Type description:	D
Operating joule integral (A2s):	205
Type (Legacy):	D
Size:	DII
Time-Current Characteristic:	gR
Rated AC voltage:	500 V
Rated DC voltage:	315 V
Rated current:	25 A
Power dissipation:	9 W
Breaking capacity AC:	50 kA
Breaking capacity DC:	8 kA
Fuse type:	D
Indicator:	Top fuse status indicator
Standards:	IEC 60269-4

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



EPLAN FILE

ETIM

Colour code

Yellow

Release characteristic

Super fast (FF)

Construction size

DII

Rated voltage

315 V

Rated current

25 A

Utilization category

Other

Logistics

Product

Net depth	21.5 mm
Net weight of the product	28 g
Net width	22 mm
Net height	50 mm
Stock unit of measure	pcs
EAN code for a single product	3838400052100


Basic Packaging


EAN code for a basic packaging	3838895012238
Basic packaging weight	0.148 kg
Basic Packaging Dimensions Depth	0.023 m
Basic Packaging Dimensions Height	0.05 m
Basic packaging volume	0 m ³
Basic Packaging Dimensions Width	0.11 m
Basic packaging quantity	5 pcs

Transport Packaging


Transport packaging weight	15.16 kg
Transport packaging volume	0.017 m ³
Transport packaging quantity	500 pcs
Customs tariff	85361050
Transport Packaging Dimensions Height	0.25 m
Transport Packaging Dimensions Width	0.235 m
Transport Packaging Dimensions Depth	0.295 m
EAN code for a transport packaging	3838895166146
Pallet quantity	26,000 pcs

Dimension

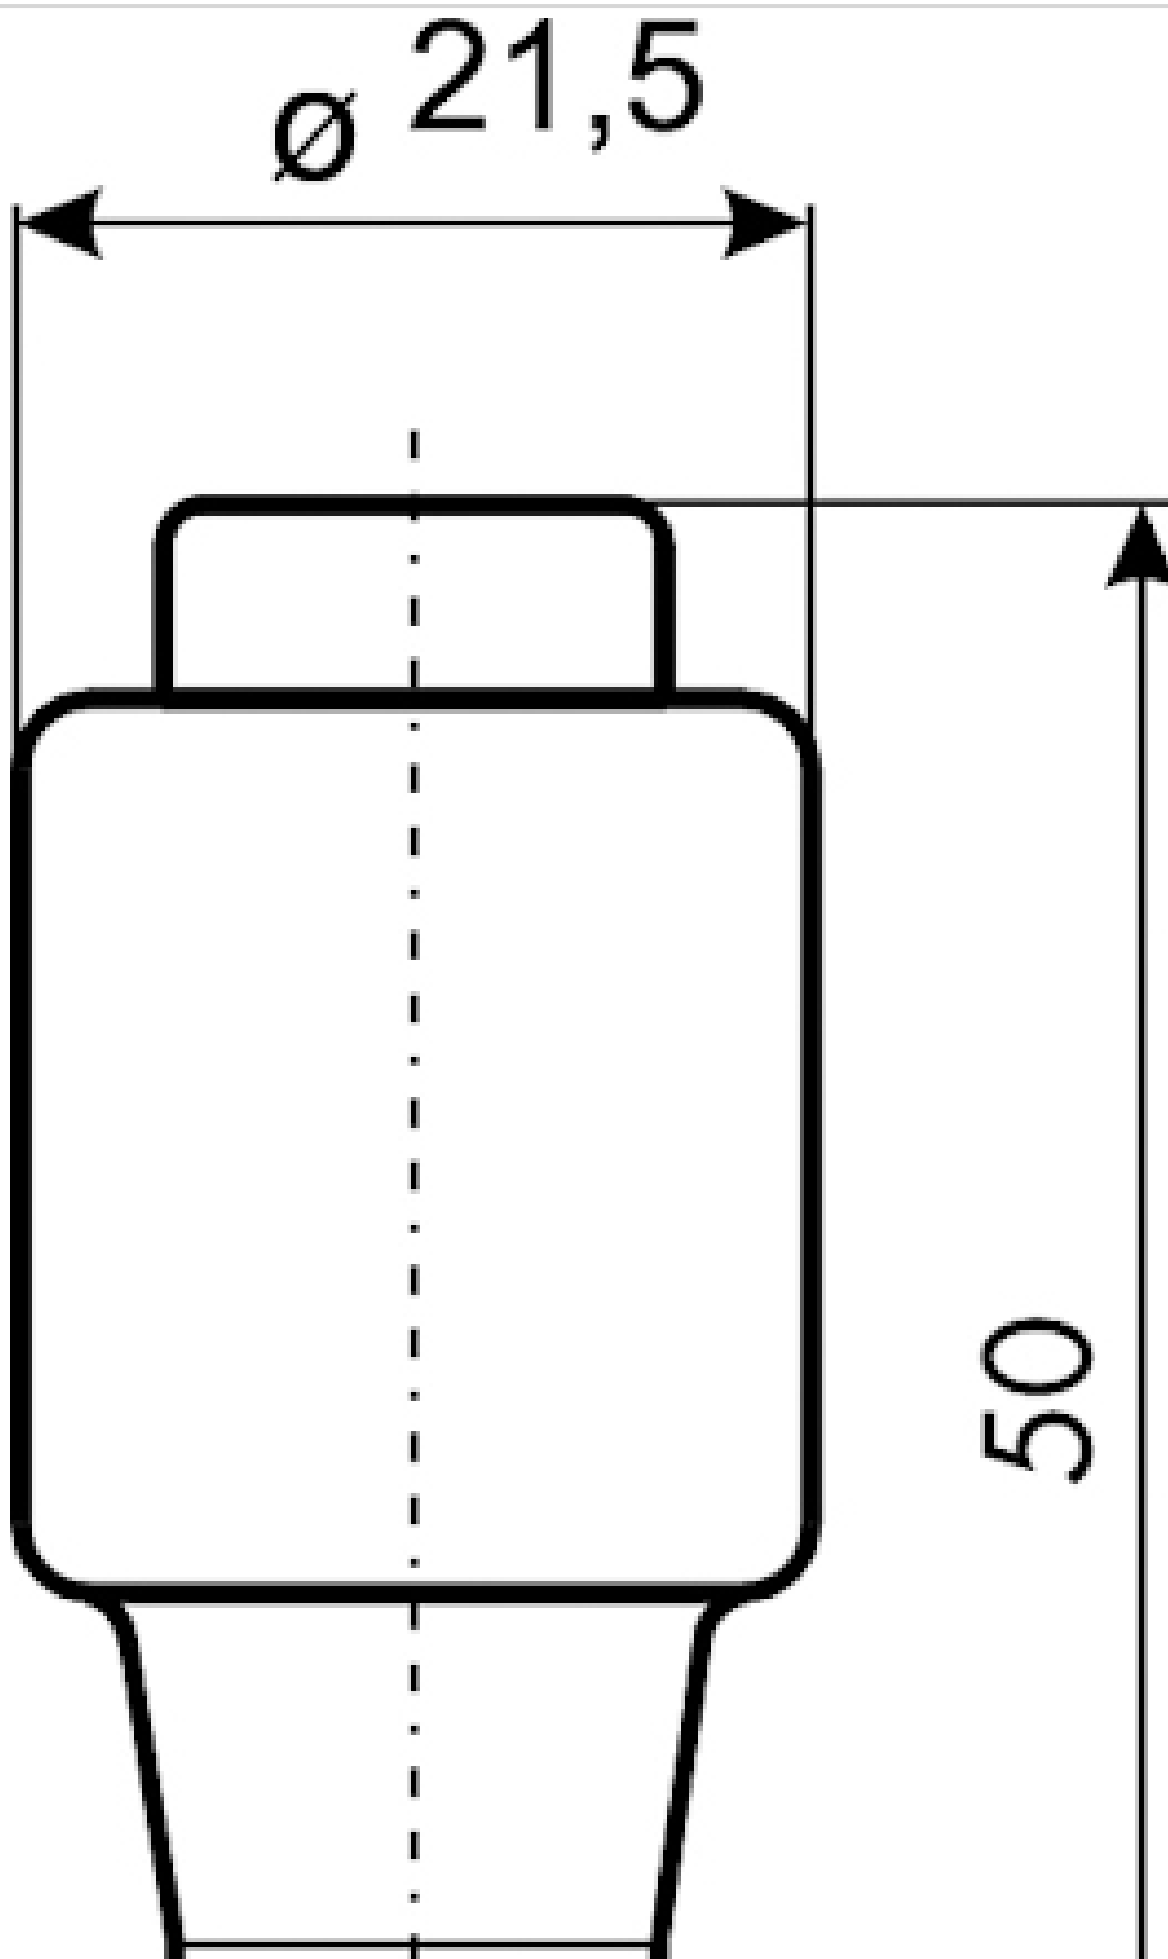

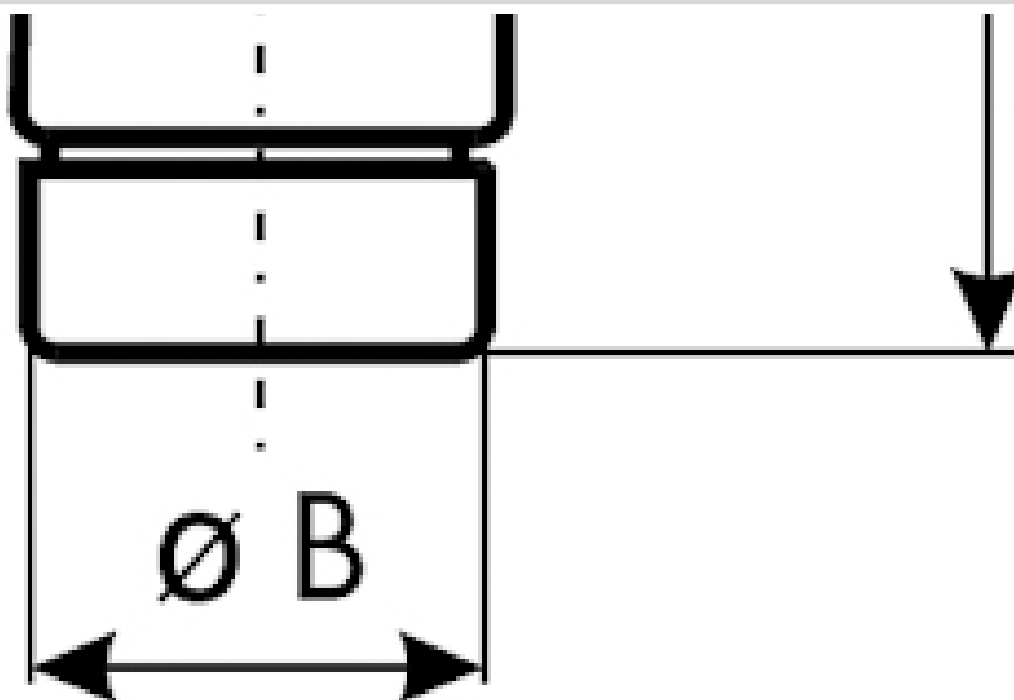

Energy characteristic

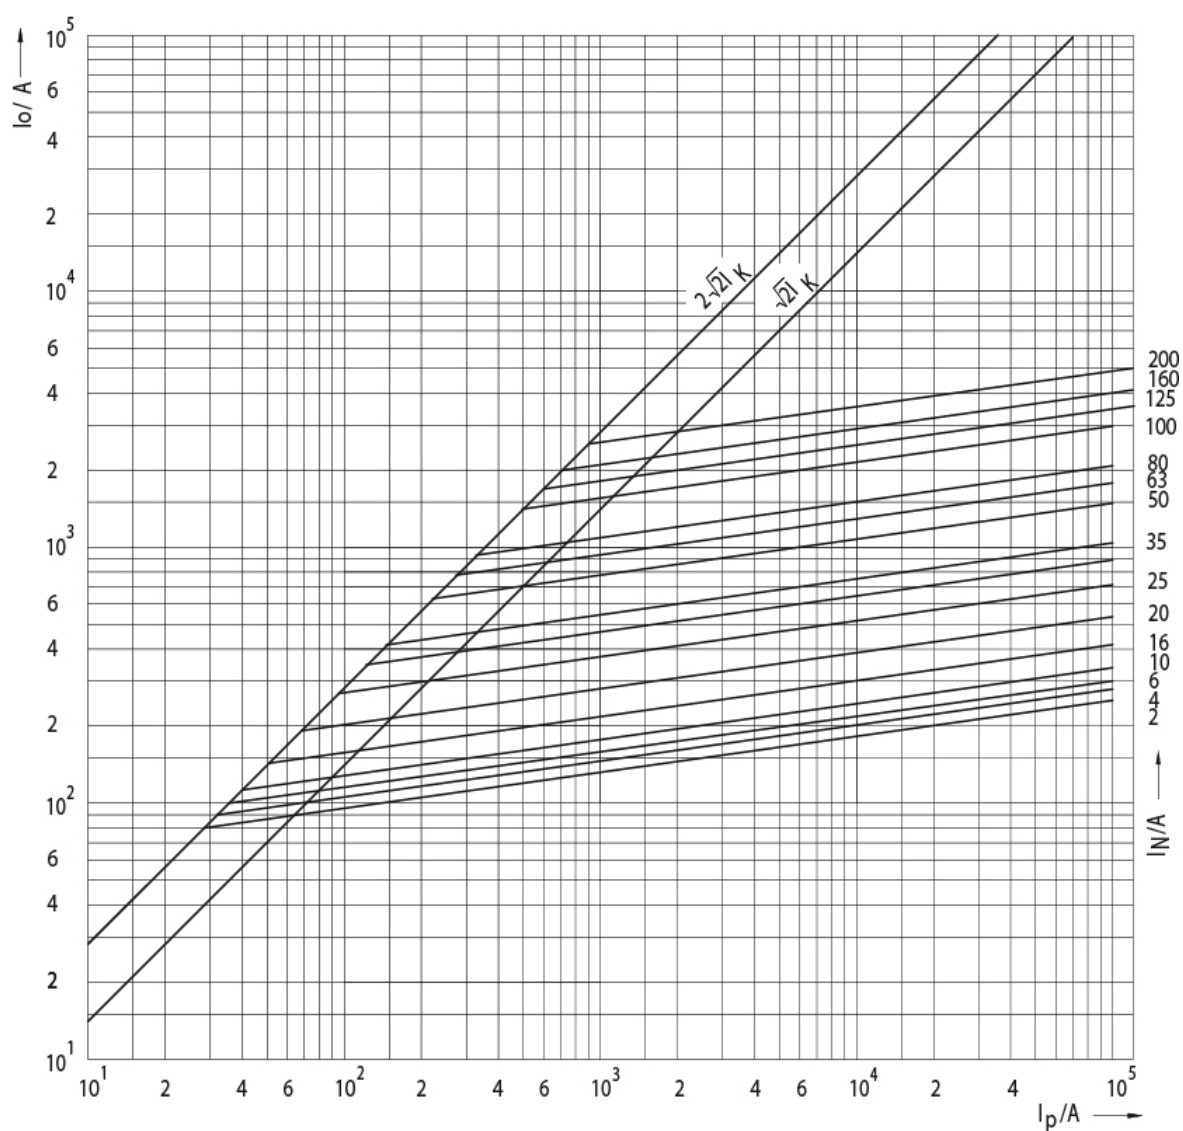

I/t characteristic

