



NH000 UQ gR 35A/690V

Fuse link

ETI Code:	004331023
Fuse type:	NH
Size:	NH000
Rated current:	35 A
Time-Current Characteristic:	gR
Rated AC voltage:	690 V
Breaking capacity AC:	50 kA
Indicator:	Top fuse status indicator
Power dissipation:	8 W
Operating joule integral (A2s):	1,160
Standards:	IEC 60269-4
Application:	For protection of semiconductor devices

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	50 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH000
Rated voltage AC	690
Power loss at rated current	8 W
Type of fuse status indicator	Top fuse status indicator
Rated current	35 A
Utilization category	gR (general purpose semiconductor protection)

Logistics

Product

Net depth	51.9 mm
Net weight of the product	120 g
Net width	21 mm
Net height	78.6 mm
Stock unit of measure	pcs
EAN code for a single product	3838895732525


Basic Packaging

EAN code for a basic packaging	3838895135715
Basic packaging weight	0.373 kg
Basic Packaging Dimensions Depth	0.084 m
Basic Packaging Dimensions Height	0.056 m
Basic packaging volume	0 m ³
Basic Packaging Dimensions Width	0.068 m
Basic packaging quantity	3 pcs


Transport Packaging

Transport packaging weight	15.286 kg
Transport packaging volume	0.018 m ³
Transport packaging quantity	120 pcs
Customs tariff	85361050
Transport Packaging Dimensions Height	0.255 m
Transport Packaging Dimensions Width	0.295 m
Transport Packaging Dimensions Depth	0.235 m
EAN code for a transport packaging	3838895160595
Pallet quantity	6,240 pcs

I/t characteristic

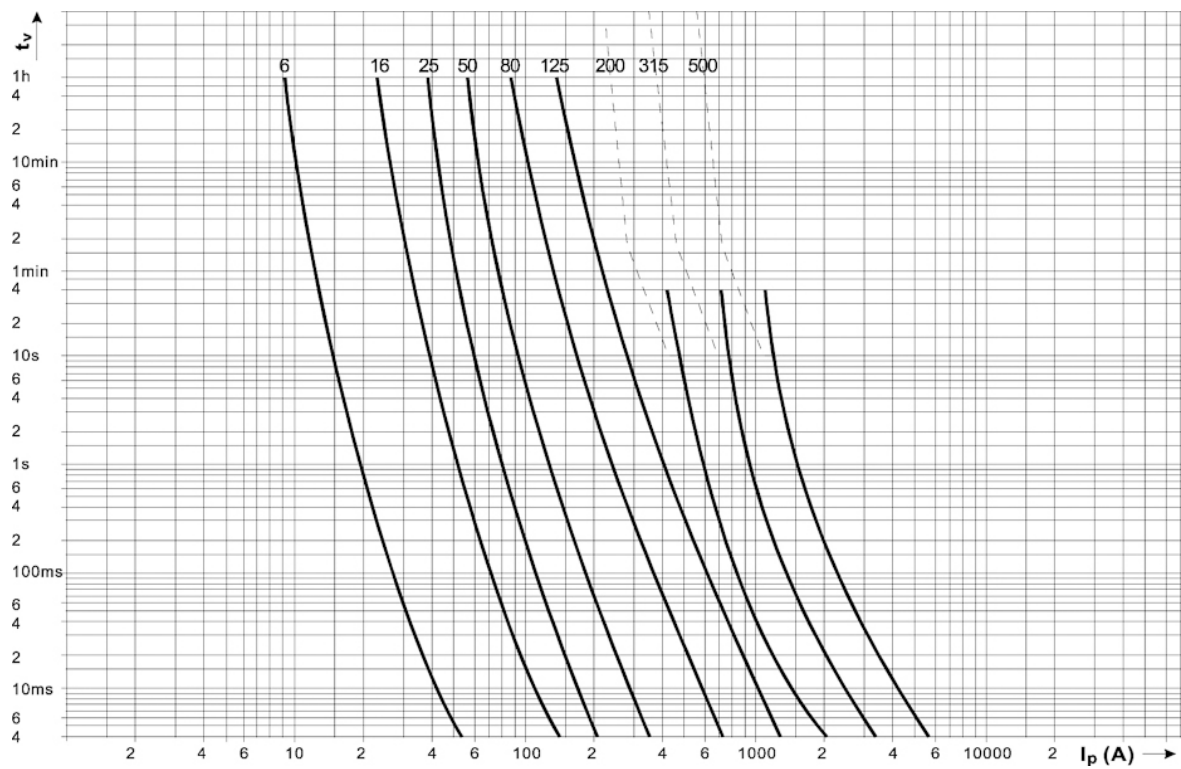

Dimension

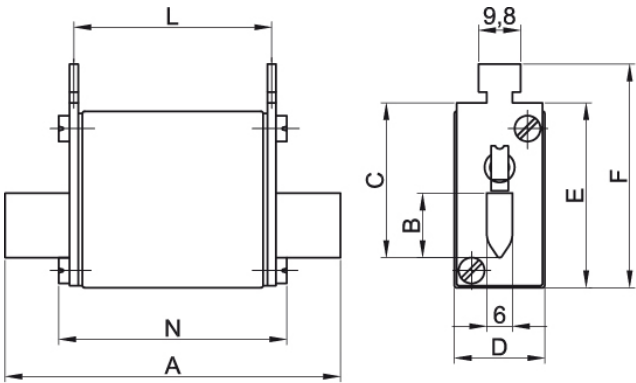

Size	A	B	C	D	E	F	L	N
00C	80	15	35	21	40	50,5	47	54
00	80	15	35	28	40	50,5	47	54
0	125	15	35	28	47	56,5	66	66

Energy characteristic

