

NH0 UQ gR 125A/690V

Fuse link



ETI Code:	004332213
Fuse type:	NH
Size:	NH0
Rated current:	125 A
Time-Current Characteristic:	gR
Rated AC voltage:	690 V
Breaking capacity AC:	50 kA
Breaking capacity DC:	25 kA
Indicator:	Top fuse status indicator
Power dissipation:	40 W
Operating joule integral (A2s):	16,000
Standards:	IEC 60269-4
Application:	For protection of semiconductor devices

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	50 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH0
Rated voltage AC	690
Power loss at rated current	40 W
Rated switching capacity DC	25 kA
Type of fuse status indicator	Top fuse status indicator
Rated current	125 A
Utilization category	gR (general purpose semiconductor protection)

Logistics

Product

Net depth	55.7 mm
Net weight of the product	220 g
Net width	27.5 mm
Net height	123.9 mm
Stock unit of measure	pcs
EAN code for a single product	3838895732822


Basic Packaging

EAN code for a basic packaging	3838895009481
Basic packaging weight	0.695 kg
Basic Packaging Dimensions Depth	0.138 m
Basic Packaging Dimensions Height	0.066 m
Basic packaging volume	0.001 m³
Basic Packaging Dimensions Width	0.093 m
Basic packaging quantity	3 pcs


Transport Packaging

Transport packaging weight	10.769 kg
Transport packaging volume	0.018 m³
Transport packaging quantity	45 pcs
Customs tariff	85361090
Transport Packaging Dimensions Height	0.255 m
Transport Packaging Dimensions Width	0.295 m
Transport Packaging Dimensions Depth	0.235 m
EAN code for a transport packaging	3838895160915
Pallet quantity	2,340 pcs

I/t characteristic

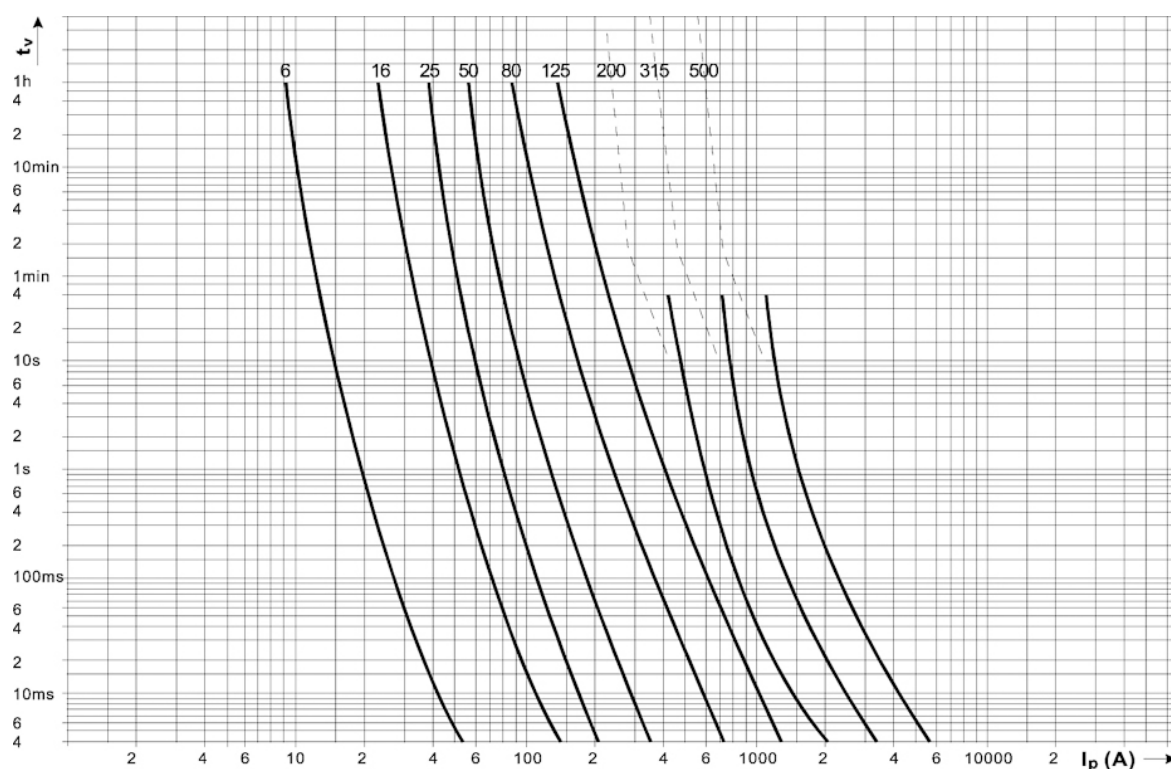

Dimension

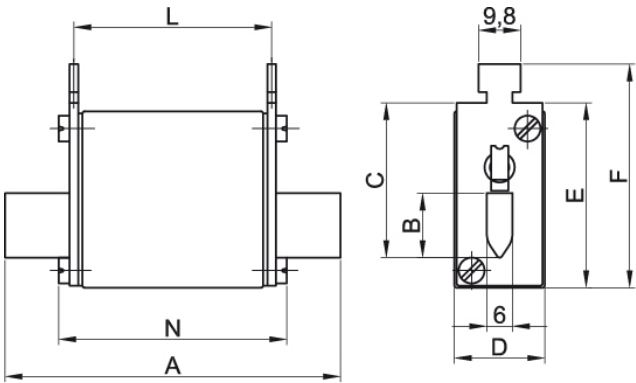

Size	A	B	C	D	E	F	L	N
00C	80	15	35	21	40	50,5	47	54
00	80	15	35	28	40	50,5	47	54
0	125	15	35	28	47	56,5	66	66

Energy characteristic

