



NH1 UQ aR 200A/690V

Fuse link

ETI Code:	004333214
Fuse type:	NH
Size:	NH1
Rated current:	200 A
Time-Current Characteristic:	aR
Rated AC voltage:	690 V
Breaking capacity AC:	50 kA
Breaking capacity DC:	25 kA
Indicator:	Top fuse status indicator
Power dissipation:	58 W
Operating joule integral (A2s):	40,000
Standards:	IEC 60269-4
Application:	For protection of semiconductor devices

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	50 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH1
Rated voltage AC	690
Power loss at rated current	58 W
Rated switching capacity DC	25 kA
Type of fuse status indicator	Top fuse status indicator
Rated current	200 A
Utilization category	aR (accompanied semiconductor protection)

Logistics

Product

Net depth	59 mm
Net weight of the product	420 g
Net width	45 mm
Net height	137 mm
Stock unit of measure	pcs
EAN code for a single product	3838895732914


Basic Packaging

EAN code for a basic packaging	3838895009665
Basic packaging weight	1.33 kg
Basic Packaging Dimensions Depth	0.142 m
Basic Packaging Dimensions Height	0.069 m
Basic packaging volume	0.001 m³
Basic Packaging Dimensions Width	0.142 m
Basic packaging quantity	3 pcs


Transport Packaging

Transport packaging weight	10.99 kg
Transport packaging volume	0.018 m³
Transport packaging quantity	24 pcs
Customs tariff	85361090
Transport Packaging Dimensions Height	0.255 m
Transport Packaging Dimensions Width	0.295 m
Transport Packaging Dimensions Depth	0.235 m
EAN code for a transport packaging	3838895160991
Pallet quantity	1,248 pcs

I/t characteristic

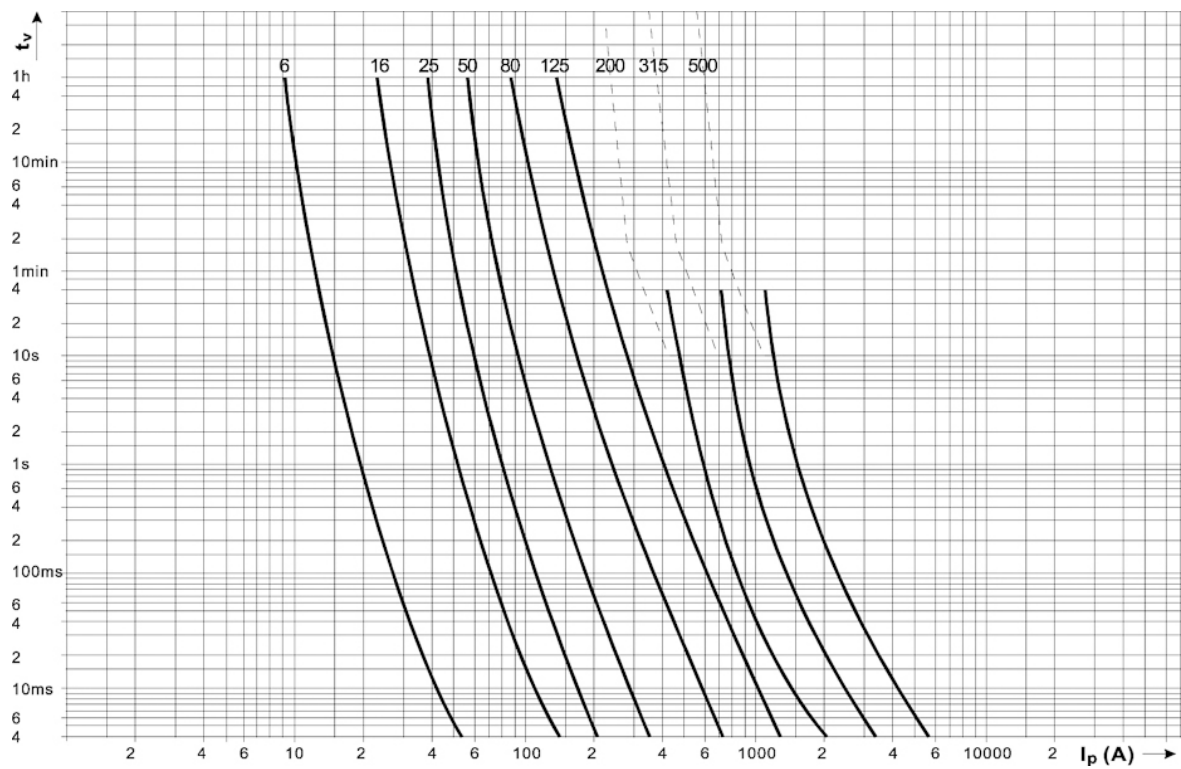

Dimension

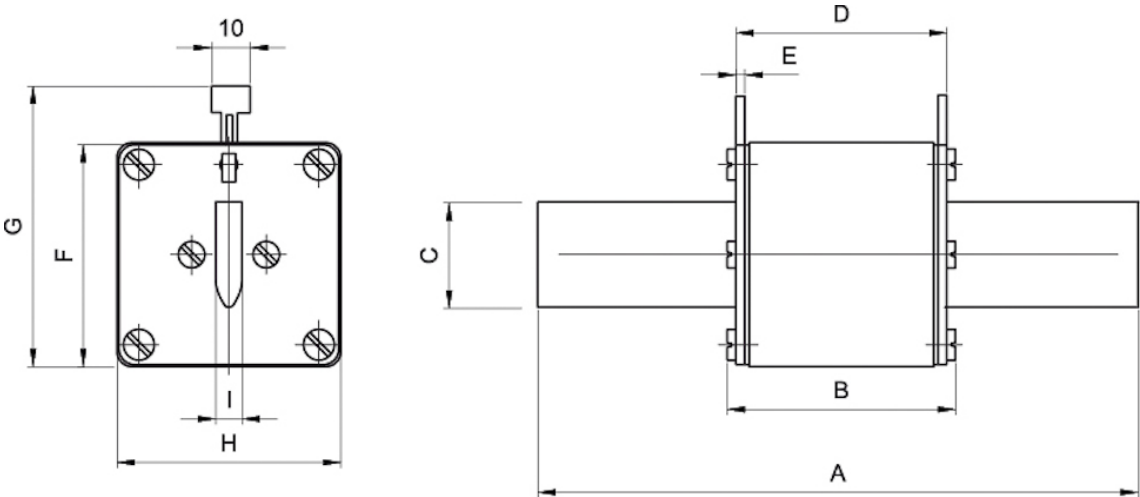

Size	A	B	C	D	E	F	G	H	I
1	135	75	20	68	2	40	61,5	46	6
2	150	75	26	68	2	48	71,5	57	6
3	150	75	36	68	2	60	81,5	69	6

Energy characteristic

