

NH00 UQ01 aR 32A/690V

Fuse link



ETI Code:	004371208
Fuse type:	NH
Size:	NH00
Rated current:	32 A
Time-Current Characteristic:	aR
Rated AC voltage:	690 V
Breaking capacity AC:	200 kA
Indicator:	Top fuse status indicator
Power dissipation:	7 W
Operating joule integral (A2s):	290
Standards:	IEC 60269-4
Application:	For protection of semiconductor devices

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	200 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH00
Rated voltage AC	690
Power loss at rated current	7 W
Type of fuse status indicator	Top fuse status indicator
Rated current	32 A
Utilization category	aR (accompanied semiconductor protection)

Logistics

Product

Net depth	59.5 mm
Net weight of the product	220 g
Net width	29 mm
Net height	79 mm
Stock unit of measure	pcs
EAN code for a single product	3838895359630


Basic Packaging

EAN code for a basic packaging	3838895346524
Basic packaging weight	0.66 kg
Basic Packaging Dimensions Depth	0.065 m
Basic Packaging Dimensions Height	0.089 m
Basic packaging volume	0 m ³
Basic Packaging Dimensions Width	0.082 m
Basic packaging quantity	3 pcs


Transport Packaging

Transport packaging weight	20.15 kg
Transport packaging volume	0.018 m ³
Transport packaging quantity	90 pcs
Customs tariff	85361050
Transport Packaging Dimensions Height	0.255 m
Transport Packaging Dimensions Width	0.295 m
Transport Packaging Dimensions Depth	0.235 m
EAN code for a transport packaging	3838895557876
Pallet quantity	4,680 pcs

I/t characteristic

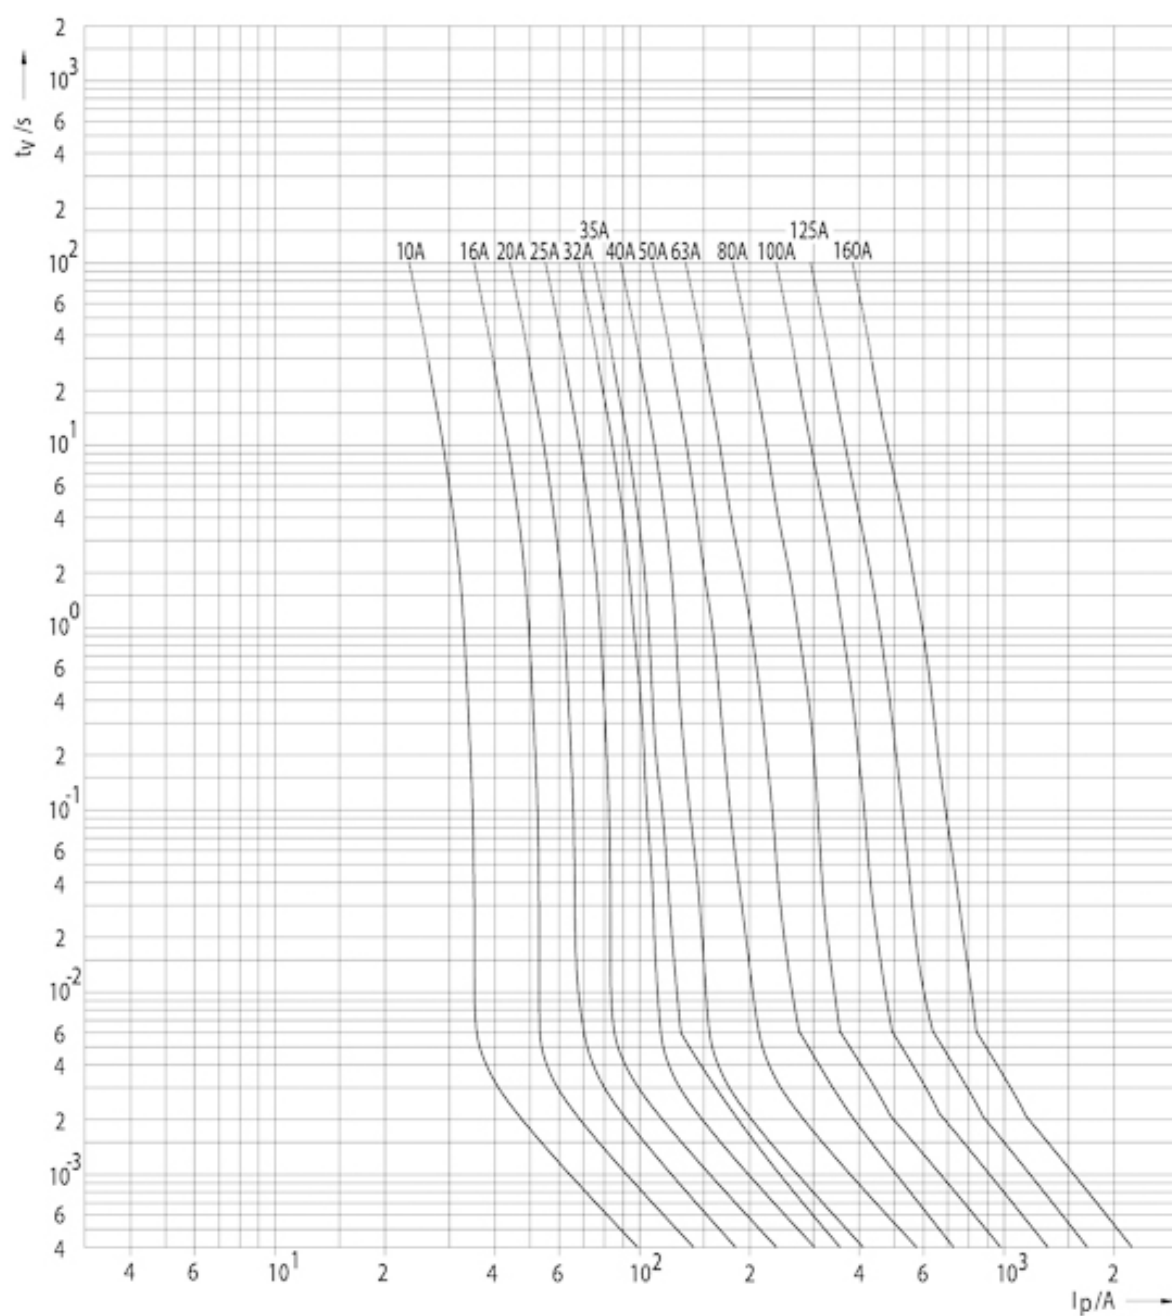

Dimension

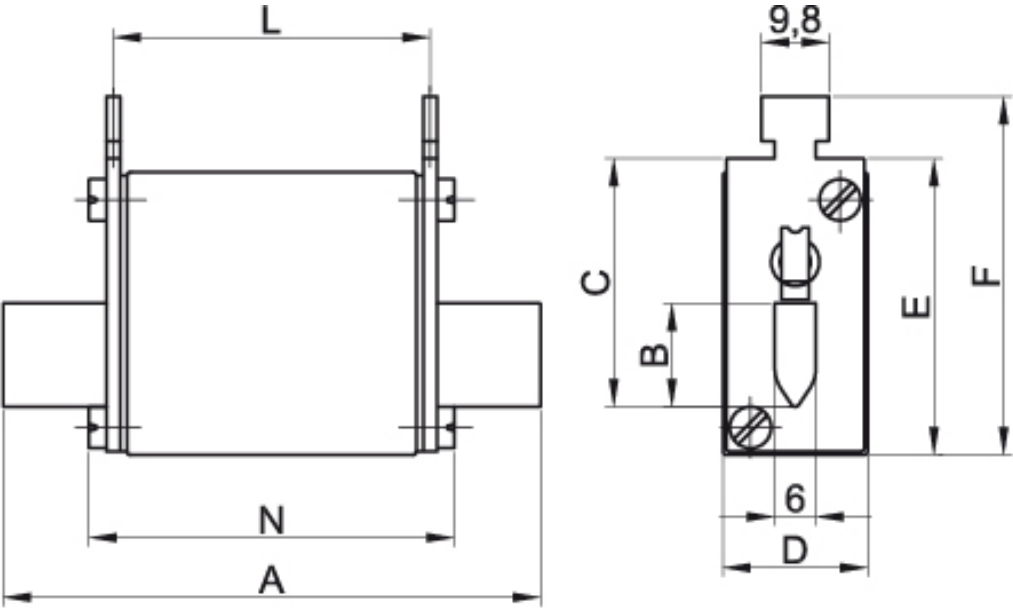

Size	A	B	C	D	E	F	L	N
00	78	15	35	30	42	51	48	52

Energy characteristic

