

EB2 125/3L 125A 3p

Molded Case Circuit Breaker



ETI Code:	004671026
Application:	60947
IP rating:	IP20
Short circuit capacity:	25/19 kA
Rated current:	125 A
Number of poles:	3
Connection type:	front connection
Rated impulse withstand voltage Uimp:	8 kV
Rated short-circuit breaking capacity at 415V Icu/Ics:	25/19 kA
Rated operational voltage (AC):	690 V
Rated operational voltage (DC):	250 V
Rated Insulation Voltage:	800 V
Thermal Adjustment:	0,63-1
Magnetic adjustment:	6-10
Adjustable or fixed:	adjustable
Standards:	60947
Function:	MCCB
Catalogue Group:	EB2
Frame Size:	125A

Online product page

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Motor drive optional	Yes
Overload release current setting(Min)	78.8 A
Rated permanent current Iu	125 A
Degree of protection (IP)	IP20
Type of control element	Rocker lever
Adjustment range undelayed short-circuit release(Min)	750 A
Type of electrical connection of main circuit	Screw connection
Number of poles	3
Overload release current setting(Max)	125 A
Device construction	Built-in device fixed built-in technique
Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	19 kA
With switched-off indicator	Yes
Adjustment range undelayed short-circuit release(Max)	1,250 A

Logistics

Product


Net depth	92 mm
Net weight of the product	1.1 kg
Net width	90 mm
Net height	155 mm
Stock unit of measure	pcs

Transport Packaging


Transport packaging weight	1.1 kg
Transport packaging volume	1.672 dm³
Transport packaging quantity	1 pcs
Customs tariff	85362090
Transport Packaging Dimensions Height	95 mm
Transport Packaging Dimensions Width	160 mm
Transport Packaging Dimensions Depth	110 mm
EAN code for a transport packaging	3838895409526
Pallet quantity	727 pcs

Dimension

Front connected

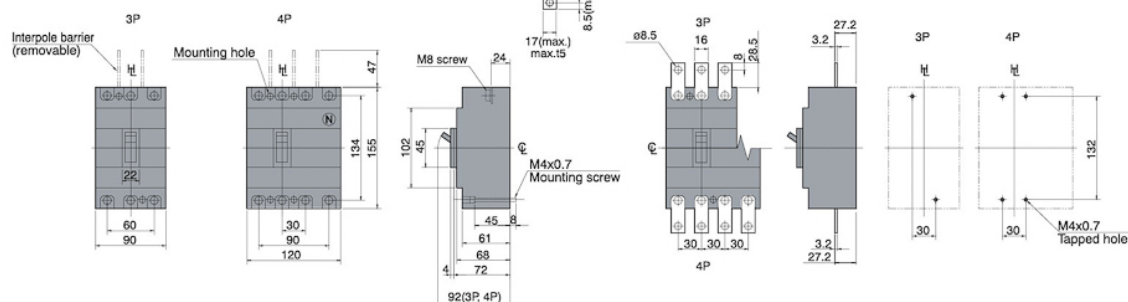

Rear connected

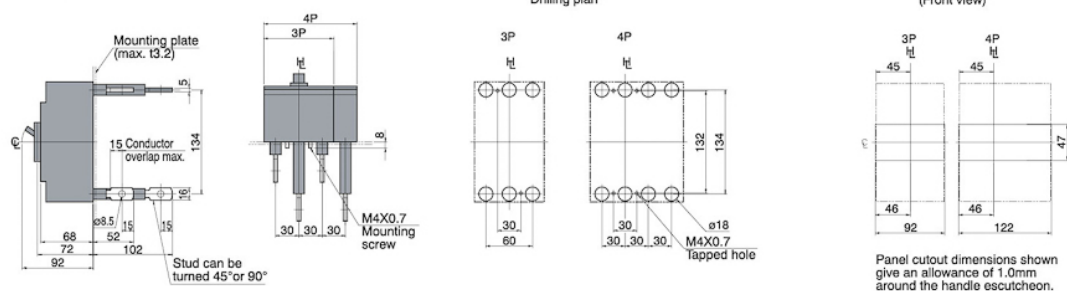

Panel cutout dimensions shown give an allowance of 1.0mm around the handle escutcheon.

I/t characteristic

