

EB2S 160/3LF 63A 3p

Molded Case Circuit Breaker



ETI Code:	004671807
Application:	60947
IP rating:	IP20
Function:	MCCB
Rated current:	63 A
Number of poles:	3
Connection type:	front connection
Standards:	60947
Rated impulse withstand voltage Uimp:	8 kV
Rated short-circuit breaking capacity at 415V Icu/Ics:	16/8 kA
Rated operational voltage (AC):	690 V
Rated operational voltage (DC):	250 V
Rated Insulation Voltage:	800 V
Thermal Adjustment:	fixed
Magnetic adjustment:	fixed
Adjustable or fixed:	fixed
Frame Size:	160A
Short circuit capacity:	16/8 kA

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Overload release current setting(Min)	63 A
Rated permanent current Iu	63 A
Degree of protection (IP)	IP20
Type of control element	Rocker lever
Adjustment range undelayed short-circuit release(Min)	1,000 A
Type of electrical connection of main circuit	Screw connection
Number of poles	3
Overload release current setting(Max)	63 A
Device construction	Built-in device fixed built-in technique
Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	16 kA
With switched-off indicator	Yes
Adjustment range undelayed short-circuit release(Max)	1,000 A

Logistics

Product


Net depth	95 mm
Net weight of the product	0.8 kg
Net width	75 mm
Net height	130 mm
Stock unit of measure	pcs

Transport Packaging


Transport packaging weight	0.9 kg
Transport packaging volume	1.26 dm³
Transport packaging quantity	1 pcs
Customs tariff	85362010
Transport Packaging Dimensions Height	90 mm
Transport Packaging Dimensions Width	100 mm
Transport Packaging Dimensions Depth	140 mm
EAN code for a transport packaging	3838895616160
Pallet quantity	1,000 pcs

Dimension

EB2S 160 F & A

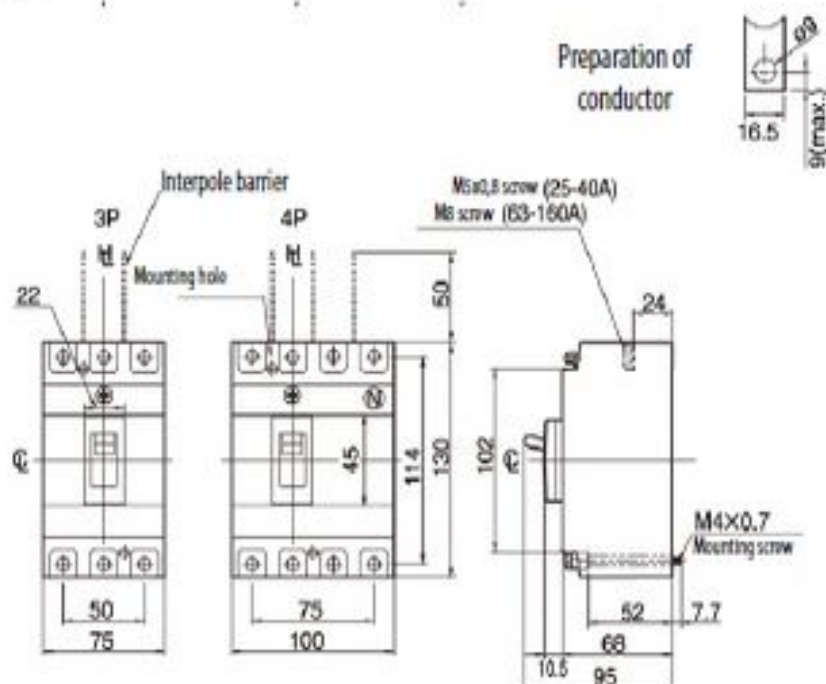

EB2S 250 F & A

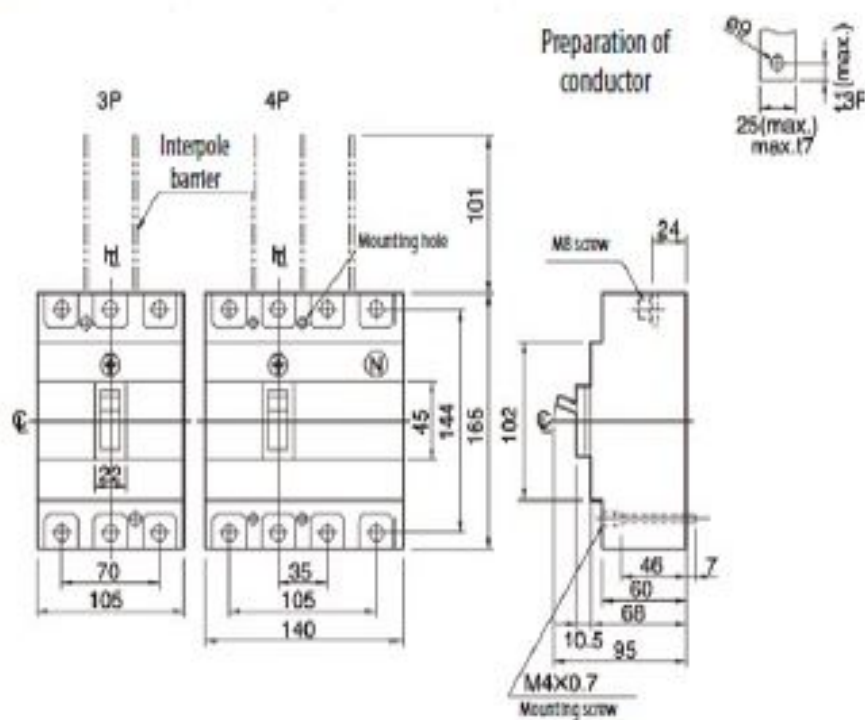

I/t characteristic

