

NHS000/80 UQ2 gR 63A/690V

Fuse link



ETI Code:	004721112
Fuse type:	NH-S
Size:	NH000
Rated current:	63 A
Time-Current Characteristic:	gR
Rated AC voltage:	690 V
Breaking capacity AC:	200 kA
Indicator:	Top fuse status indicator
Power dissipation:	17.8 W
Operating joule integral (A2s):	3,600
Standards:	IEC 60269-4
Application:	For protection of semiconductor devices

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	200 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH000
Rated voltage AC	690
Power loss at rated current	17.8 W
Type of fuse status indicator	Top fuse status indicator
Rated current	63 A
Utilization category	gR (general purpose semiconductor protection)

Logistics

Product

Net depth	56 mm
Net weight of the product	120 g
Net width	20.8 mm
Net height	98.5 mm
Stock unit of measure	pcs
EAN code for a single product	3838895359647


Basic Packaging

EAN code for a basic packaging	3838895350743
Basic packaging weight	0.391 kg
Basic Packaging Dimensions Depth	0.107 m
Basic Packaging Dimensions Height	0.063 m
Basic packaging volume	0.001 m ³
Basic Packaging Dimensions Width	0.095 m
Basic packaging quantity	3 pcs

Transport Packaging


Transport packaging weight	7.393 kg
Transport packaging volume	0.018 m ³
Transport packaging quantity	54 pcs
Customs tariff	85361050
Transport Packaging Dimensions Height	0.255 m
Transport Packaging Dimensions Width	0.295 m
Transport Packaging Dimensions Depth	0.235 m
EAN code for a transport packaging	3838895562337
Pallet quantity	2,808 pcs

Dimension

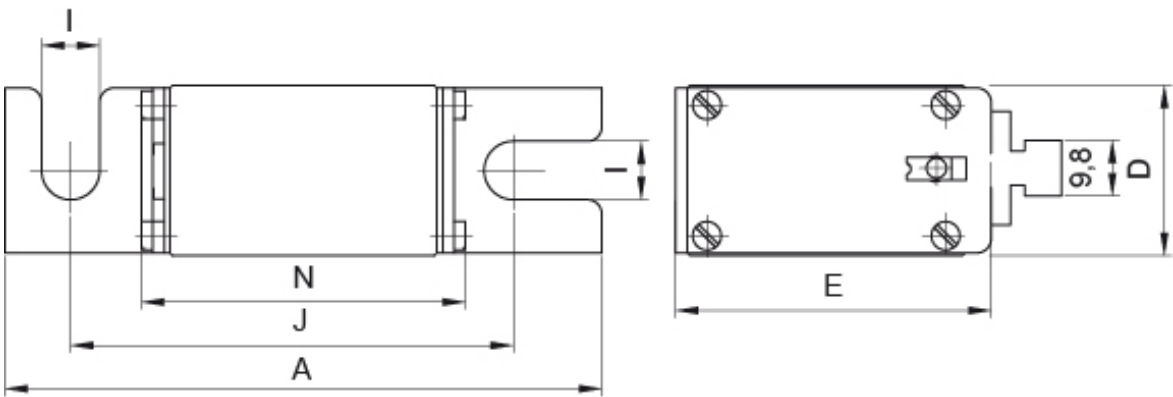

Size	A	D	E	I	J	N
00C	101	21	40	8,5	78	54

Energy characteristic

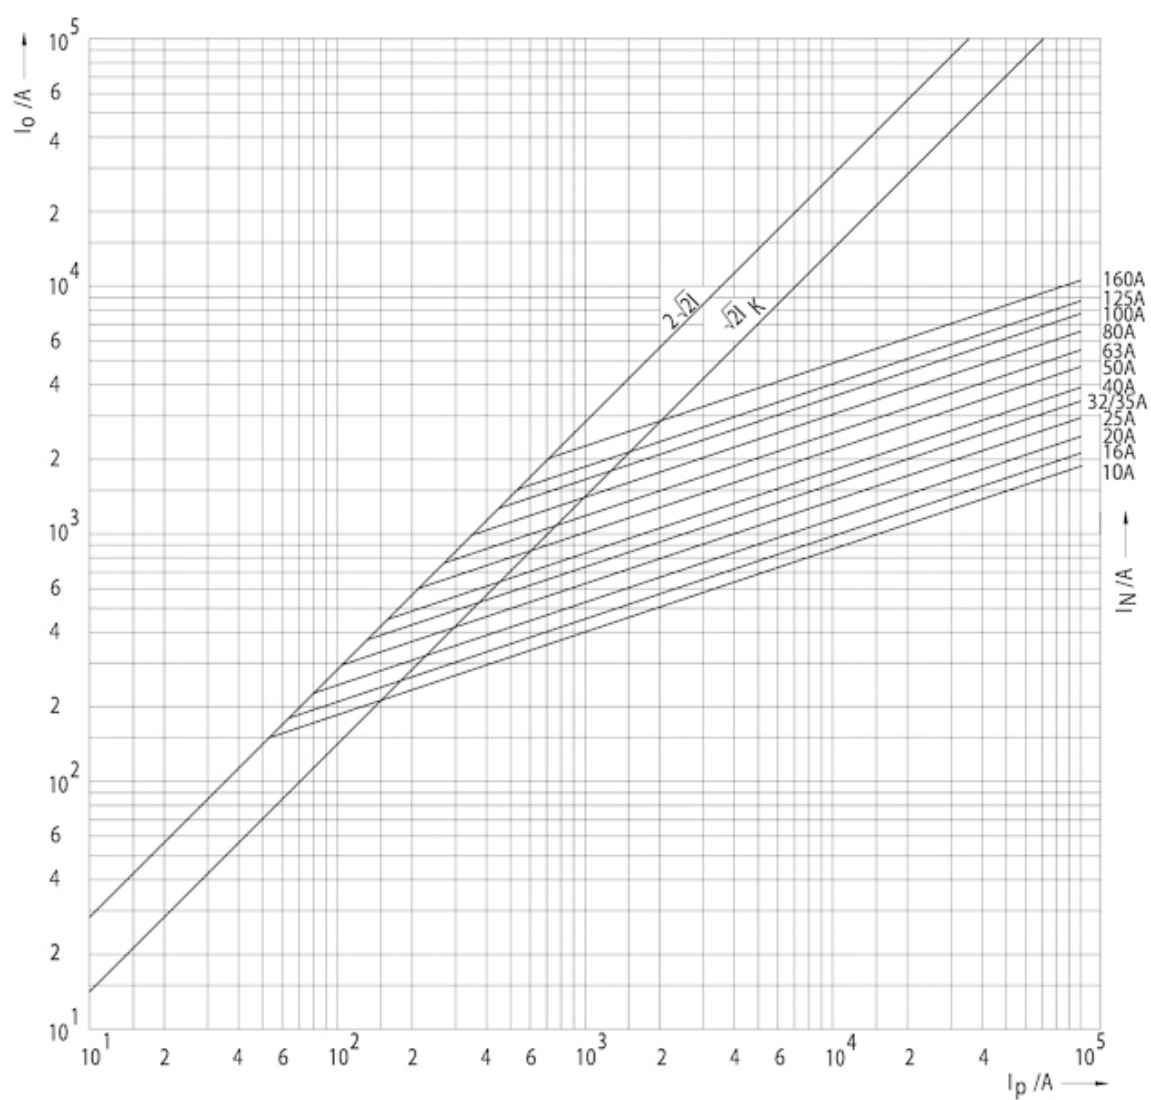

I/t characteristic

