

NH000 UQ2 gR 32A/690V

Fuse link



ETI Code:	004721208
Fuse type:	NH
Size:	NH000
Rated current:	32 A
Time-Current Characteristic:	gR
Rated AC voltage:	690 V
Breaking capacity AC:	200 kA
Indicator:	Top fuse status indicator
Power dissipation:	12.5 W
Operating joule integral (A2s):	920
Standards:	IEC 60269-4
Application:	For protection of semiconductor devices

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	200 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH000
Rated voltage AC	690
Power loss at rated current	12.5 W
Type of fuse status indicator	Top fuse status indicator
Rated current	32 A
Utilization category	gR (general purpose semiconductor protection)

Logistics

Product

Net depth	52 mm
Net weight of the product	130 g
Net width	20.7 mm
Net height	80.2 mm
Stock unit of measure	pcs
EAN code for a single product	3838895359067


Basic Packaging

EAN code for a basic packaging	3838895350323
Basic packaging weight	0.41 kg
Basic Packaging Dimensions Depth	0.07 m
Basic Packaging Dimensions Height	0.061 m
Basic packaging volume	0 m³
Basic Packaging Dimensions Width	0.087 m
Basic packaging quantity	3 pcs

Transport Packaging


Transport packaging weight	16.762 kg
Transport packaging volume	0.018 m³
Transport packaging quantity	120 pcs
Customs tariff	85361050
Transport Packaging Dimensions Height	0.255 m
Transport Packaging Dimensions Width	0.295 m
Transport Packaging Dimensions Depth	0.235 m
EAN code for a transport packaging	3838895561903
Pallet quantity	6,240 pcs

Dimension

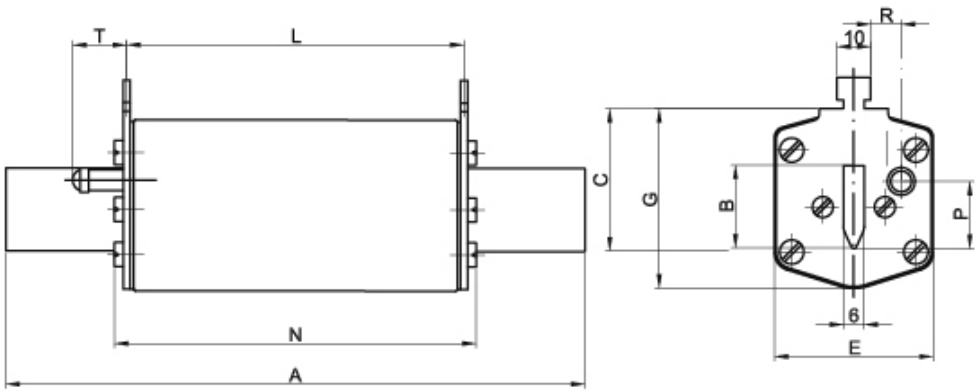

Size	A	B	C	E	G	S	L	N	P	T
00C	78	15	35	21	42	6	46	53	20,5	18

Energy characteristic

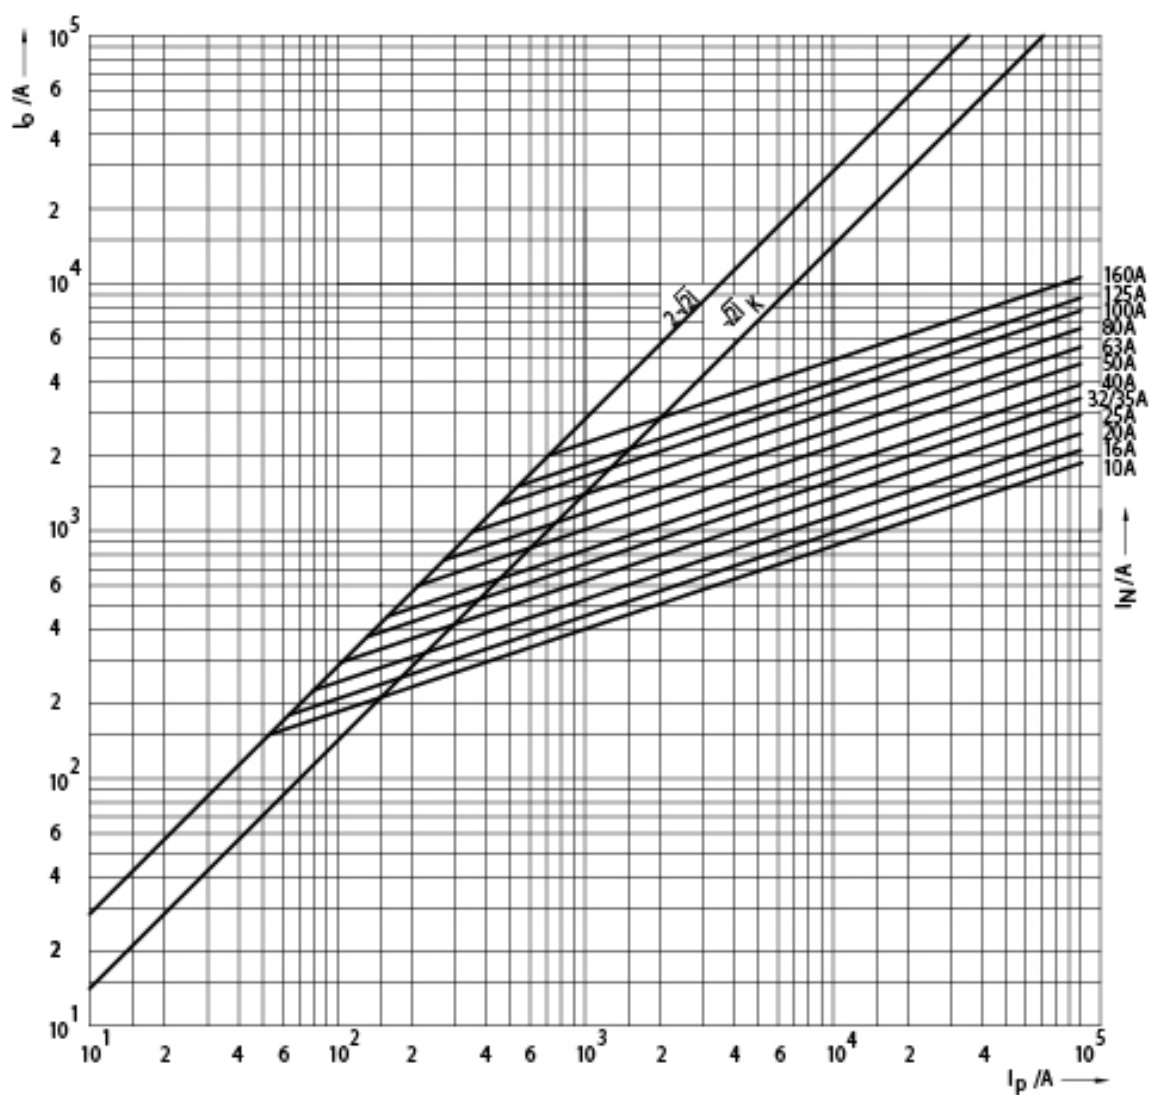

I/t characteristic

