



NHS2/110 gS 450A/690V

Fuse link

ETI Code:	004724252
Fuse type:	NH-S
Size:	NH2
Rated current:	450 A
Time-Current Characteristic:	gS
Rated AC voltage:	690 V
Breaking capacity AC:	100 kA
Indicator:	Top fuse status indicator
Power dissipation:	52 W
Operating joule integral (A2s):	765,000
Standards:	IEC 60269-4
Application:	For protection of semiconductor devices

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	100 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH2
Rated voltage AC	690
Power loss at rated current	52 W
Type of fuse status indicator	Top fuse status indicator
Rated current	450 A
Utilization category	Other

Logistics

Product

Net depth	60 mm
Net weight of the product	820 g
Net width	60 mm
Net height	139 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	3838895506027
Basic packaging weight	0.87 kg
Basic Packaging Dimensions Depth	0.062 m
Basic Packaging Dimensions Height	0.152 m
Basic packaging volume	0.001 m³
Basic Packaging Dimensions Width	0.075 m
Basic packaging quantity	1 pcs


Transport Packaging

Transport packaging weight	14.27 kg
Transport packaging volume	0.018 m³
Transport packaging quantity	16 pcs
Customs tariff	85361090
Transport Packaging Dimensions Height	0.255 m
Transport Packaging Dimensions Width	0.295 m
Transport Packaging Dimensions Depth	0.235 m
EAN code for a transport packaging	3838895566434
Pallet quantity	832 pcs

I/t characteristic

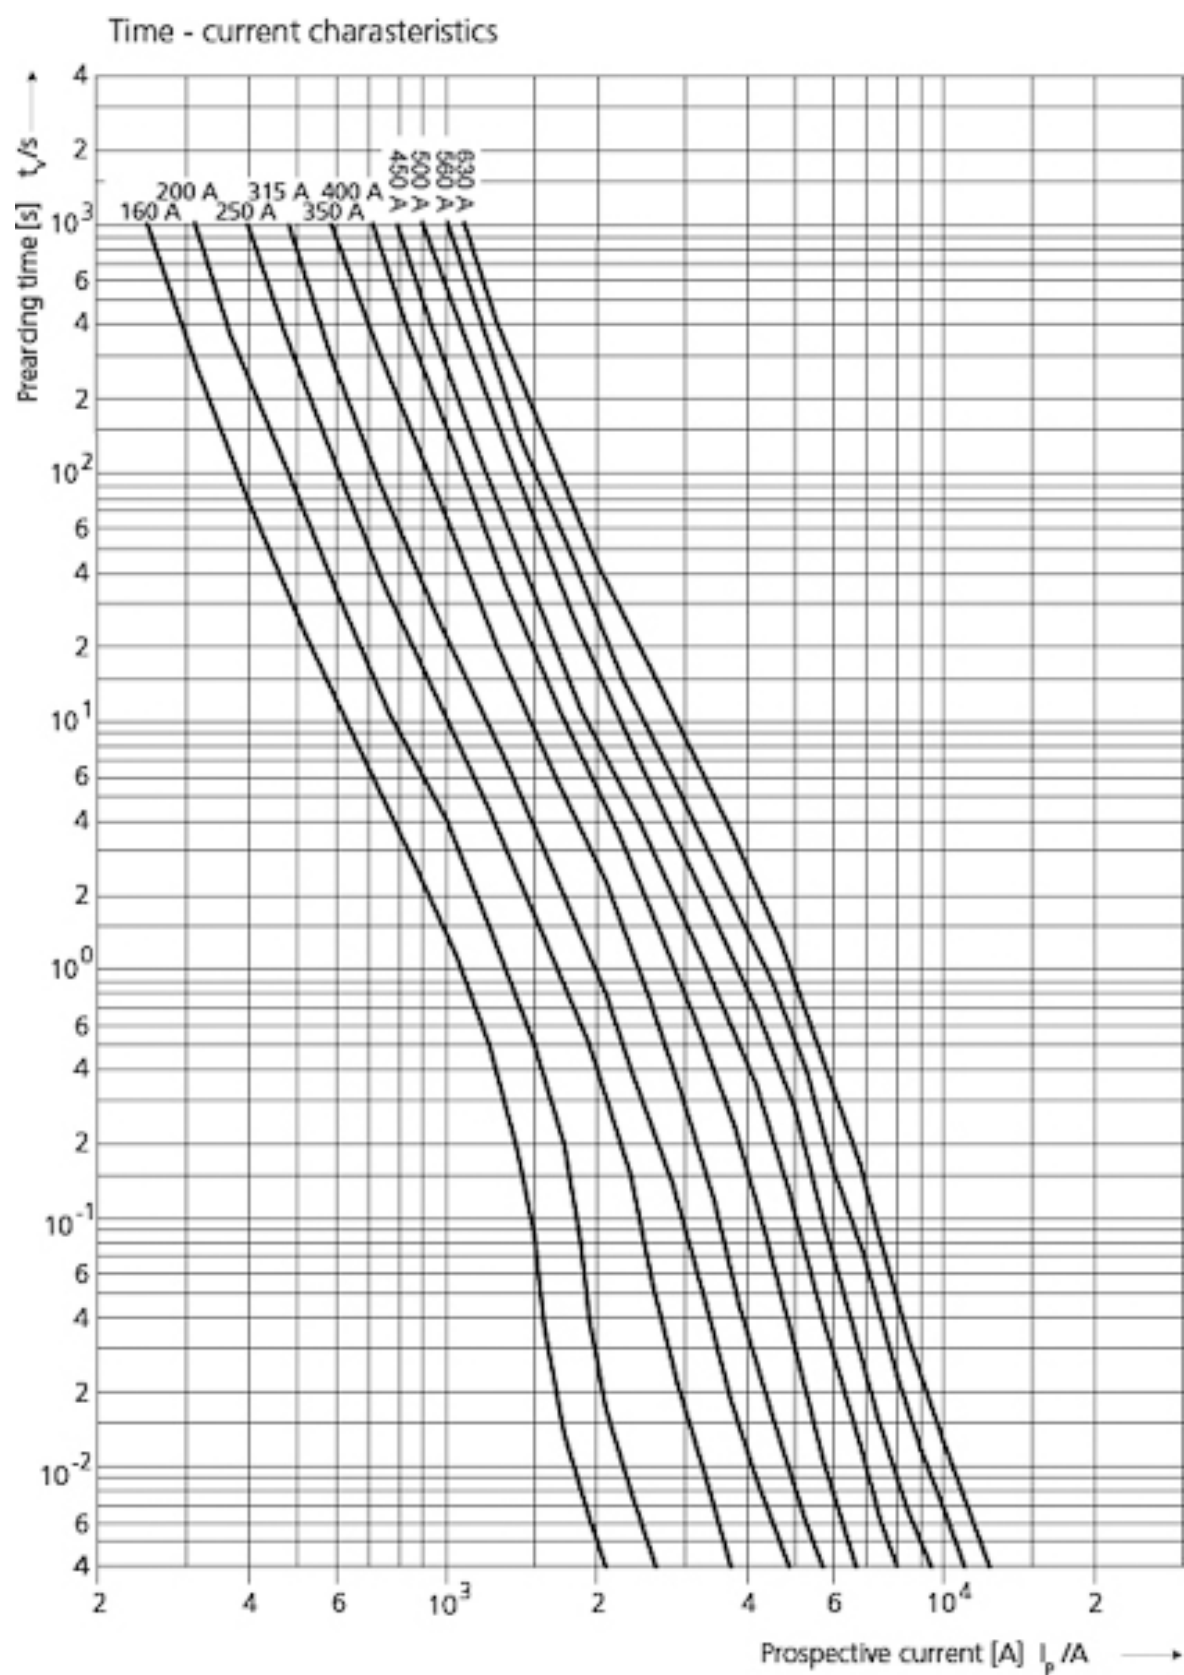

Dimension

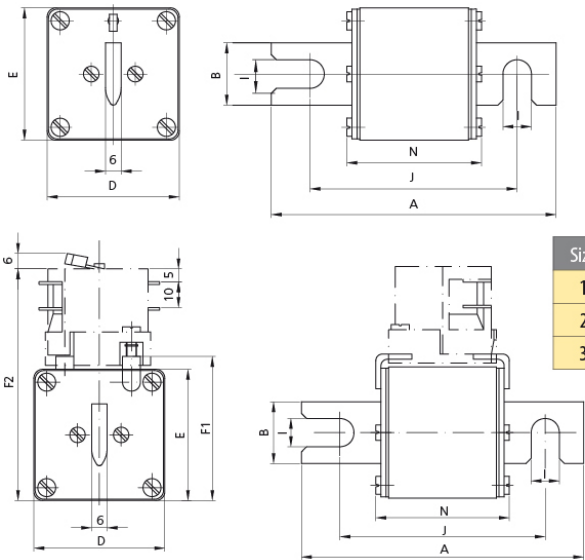

Size	A	B	D	E	F1	F2	I	J	N
1	140	24	51	51	56	90	11	110	74
2	140	30	60	60	65	99	11	110	74
3	140	37	75	75	80	114	11	110	74

Energy characteristic

