

NH1 UQ02 aR 315A/690V

Fuse link



ETI Code:	004743221
Fuse type:	NH
Size:	NH1
Rated current:	315 A
Time-Current Characteristic:	aR
Rated AC voltage:	690 V
Breaking capacity AC:	200 kA
Indicator:	Top fuse status indicator
Power dissipation:	66 W
Operating joule integral (A2s):	42,000
Standards:	IEC 60269-4
Application:	For protection of semiconductor devices

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	200 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH1
Rated voltage AC	690
Power loss at rated current	66 W
Type of fuse status indicator	Top fuse status indicator
Rated current	315 A
Utilization category	aR (accompanied semiconductor protection)

Logistics

Product

Net depth	63 mm
Net weight of the product	640 g
Net width	51 mm
Net height	135 mm
Stock unit of measure	pcs
EAN code for a single product	3838895756552


Basic Packaging

EAN code for a basic packaging	3838895399858
Basic packaging weight	1.996 kg
Basic Packaging Dimensions Depth	0.17 m
Basic Packaging Dimensions Height	0.079 m
Basic packaging volume	0.002 m³
Basic Packaging Dimensions Width	0.17 m
Basic packaging quantity	3 pcs


Transport Packaging

Transport packaging weight	16.514 kg
Transport packaging volume	0.033 m³
Transport packaging quantity	24 pcs
Customs tariff	85361090
Transport Packaging Dimensions Height	0.23 m
Transport Packaging Dimensions Width	0.38 m
Transport Packaging Dimensions Depth	0.38 m
EAN code for a transport packaging	3838895563198
Pallet quantity	576 pcs

I/t characteristic

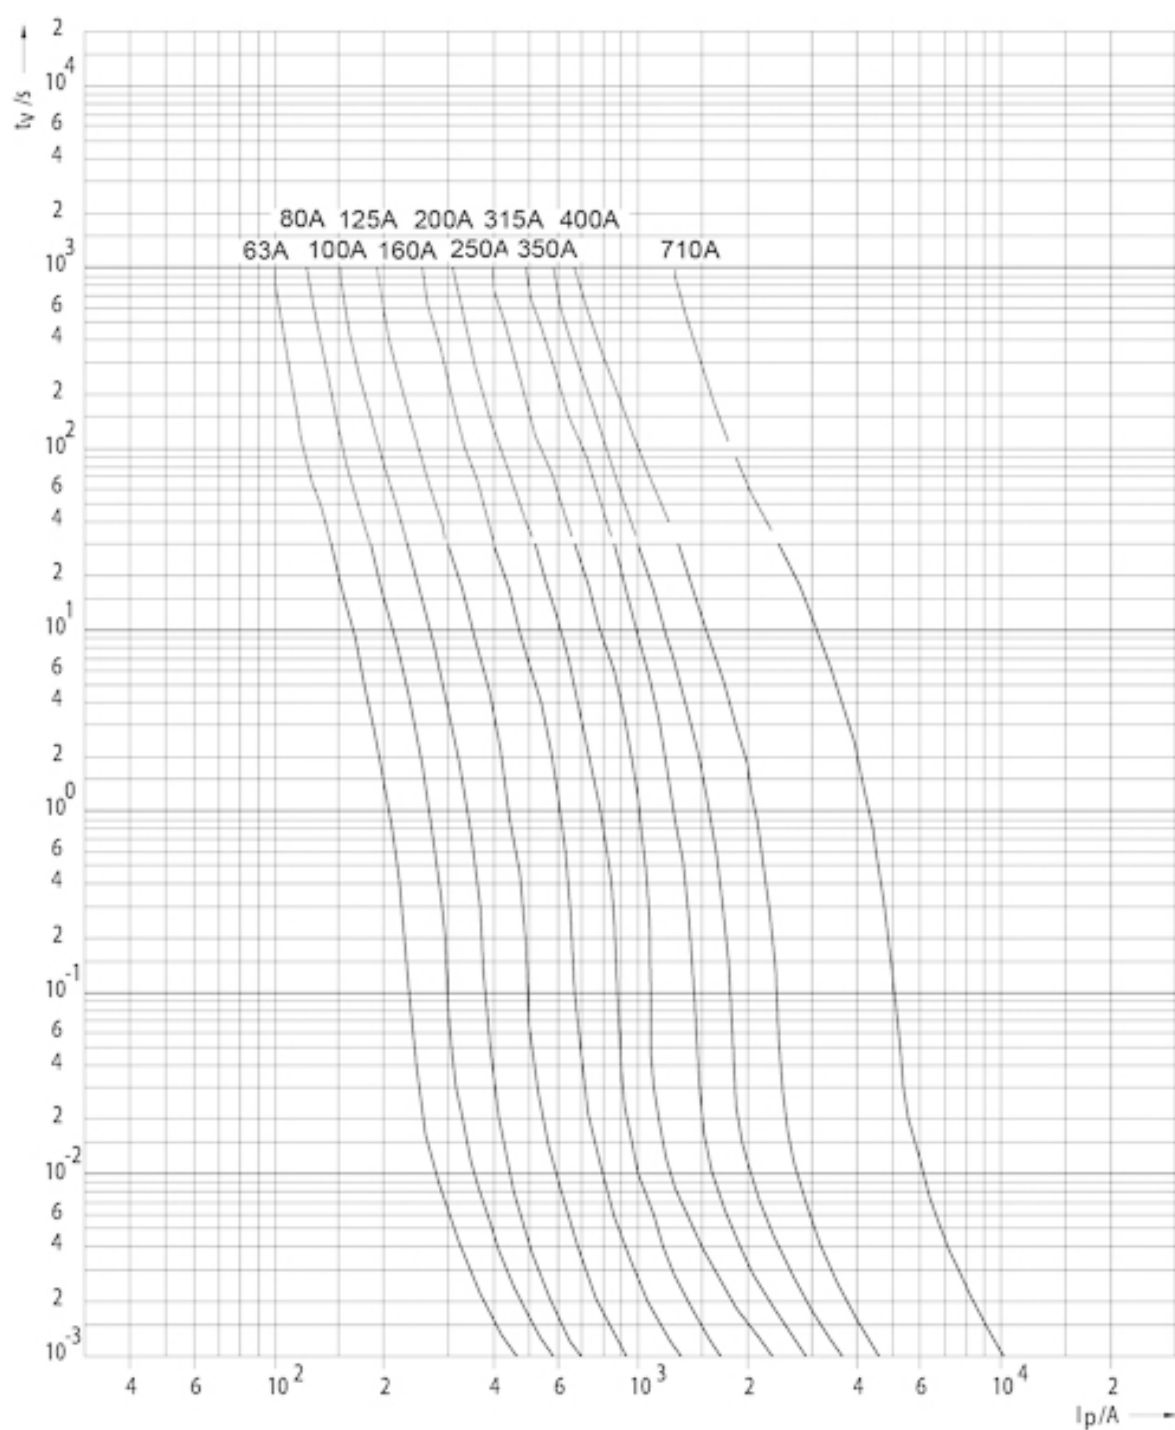

Dimension

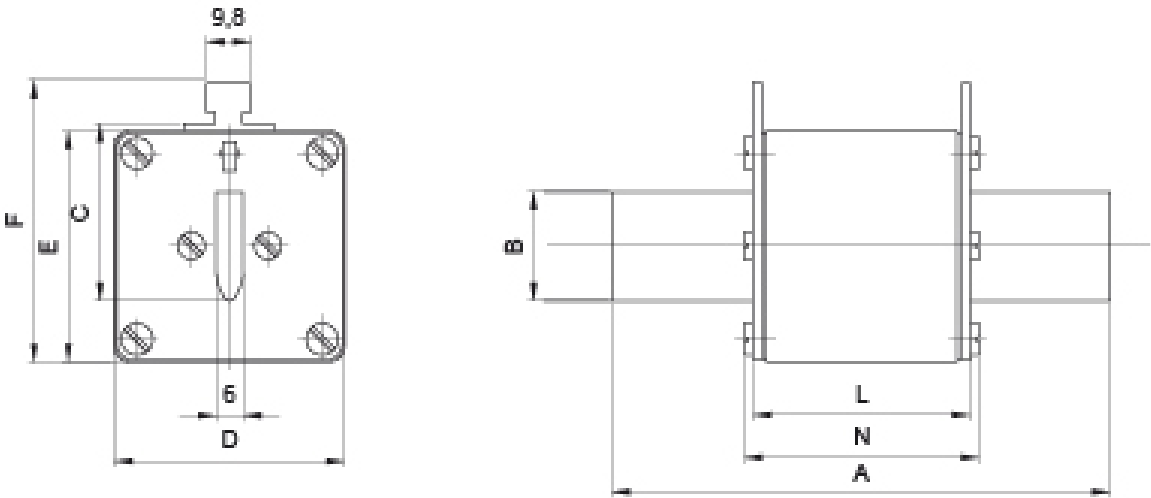

Size	A	B	C	D	E	F	L	N
1	135	24	40	46	52	62	65	72
2	150	30	48	54	61	71	65	72
3	150	37	60	64	74	84	65	72

Energy characteristic

