


*BS17UQ/63/63A/690V

Fuse link

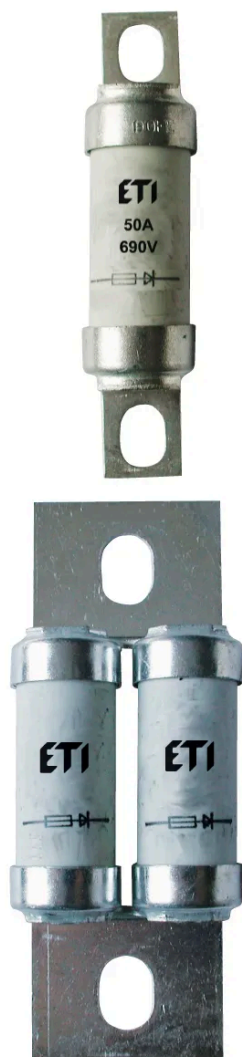

ETI Code:	004750615
Catalogue Group:	Semiconductor Protection
Product group:	Semiconductor Protection
Type description:	BS
Type (Legacy):	BS
Rated current:	63 A
Rated AC voltage:	690 V
Rated DC voltage:	350 V
Time-Current Characteristic:	aR
Breaking capacity AC:	100 kA
Breaking capacity DC:	100 kA
Application:	For protection of semiconductor devices
Power dissipation:	11.5 W
Operating joule integral (A2s):	2,100
Standards:	IEC 60269-4, BS88 Part 4

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



2D FILE



EPLAN FILE

ETIM

Size	Other
Breaking capacity	100 kA
Rated current	63 A
Utilization category	Other

Logistics

Product

Net depth	19.1 mm
Net weight of the product	0.059 kg
Net width	17 mm
Net height	77 mm
Stock unit of measure	pcs
EAN code for a single product	3838400053138


Basic Packaging

EAN code for a basic packaging	3838895416166
Basic packaging weight	0.211 kg
Basic packaging volume	0.014 dm ³
Basic packaging quantity	5 pcs


Transport Packaging

Transport packaging weight	0.585 kg
Transport packaging volume	0.029 dm ³
Transport packaging quantity	10 pcs
Customs tariff	85361050
EAN code for a transport packaging	3838895361565
Pallet quantity	13,680 pcs

Dimension

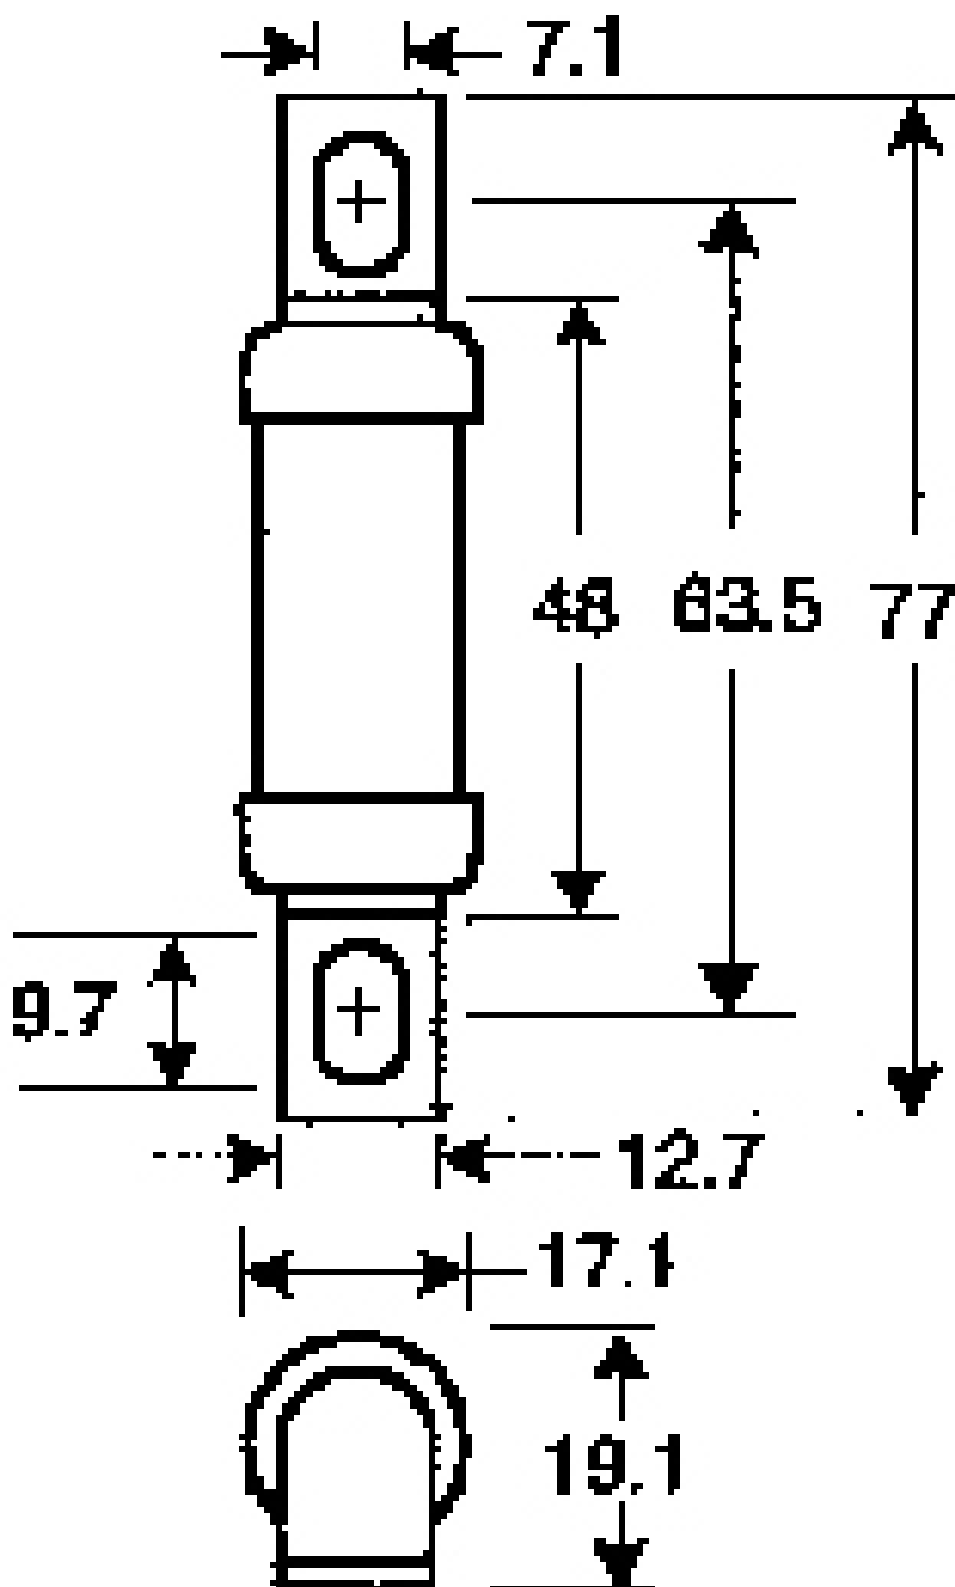

Energy characteristic

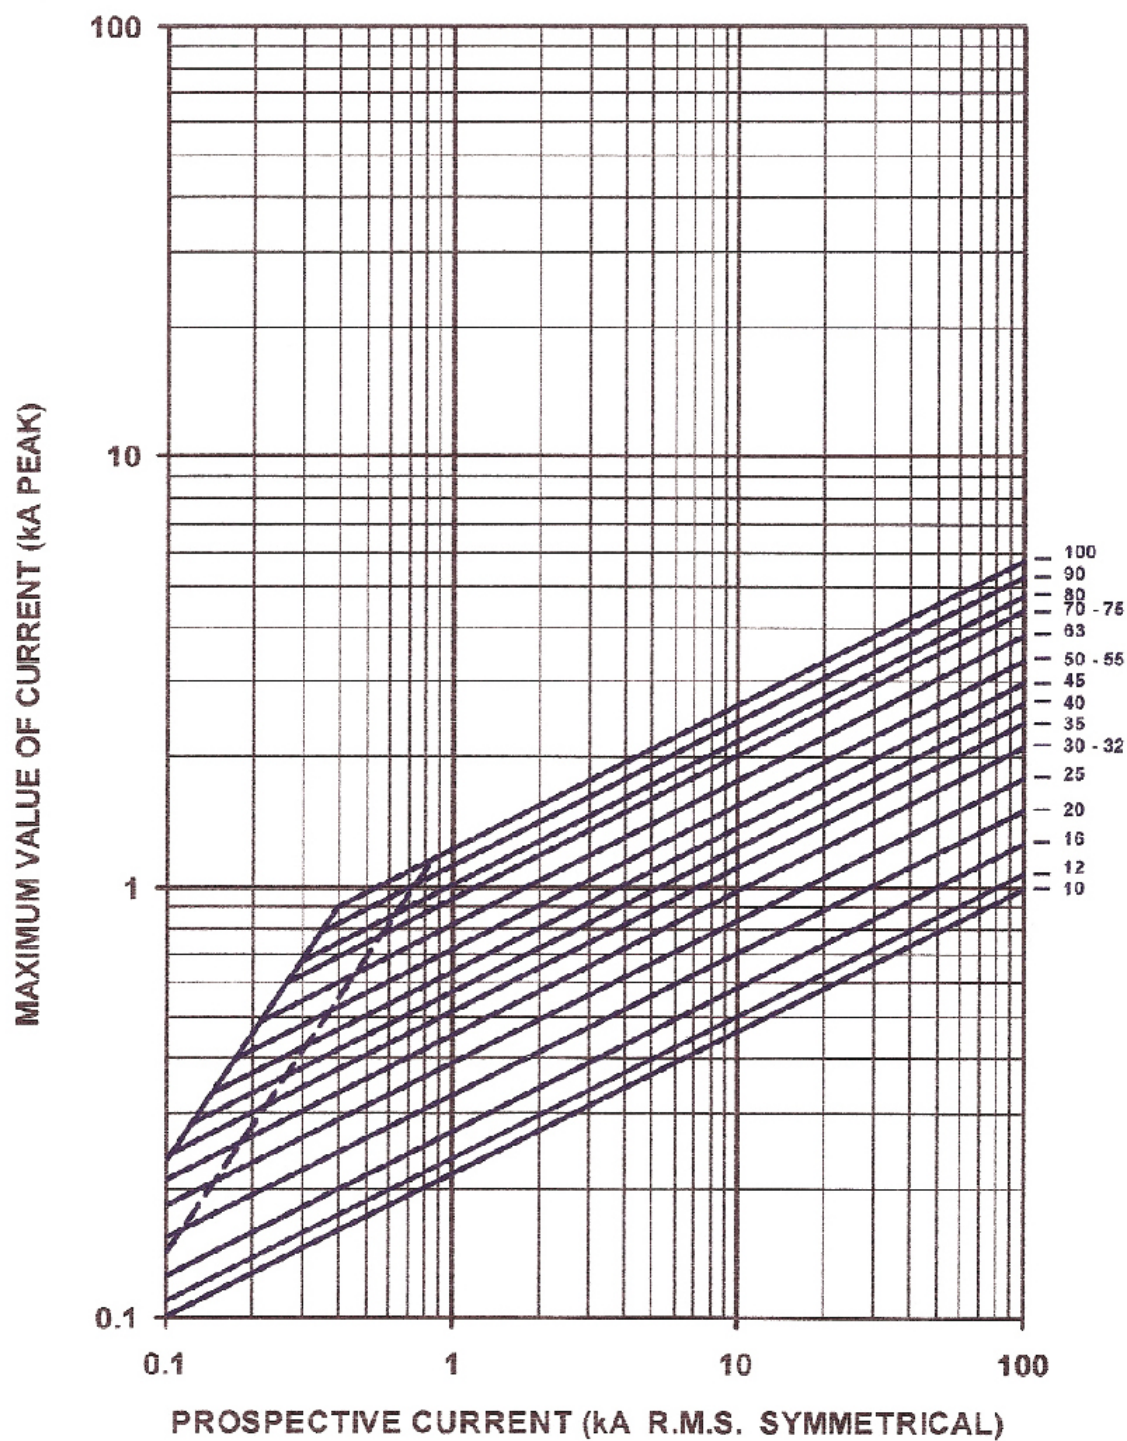

I/t characteristic

