


*BS17UQ/63/100A/690V

Fuse link

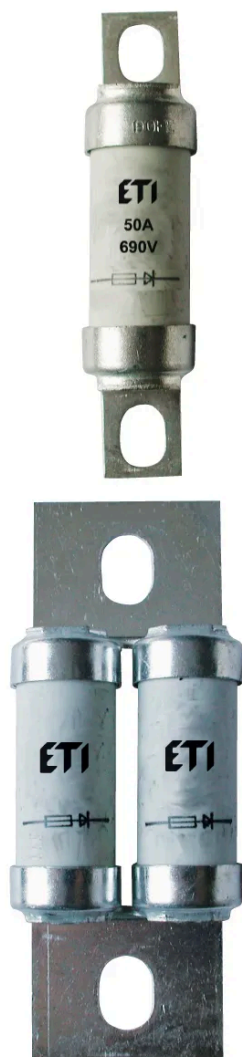

ETI Code:	004750622
Catalogue Group:	Semiconductor Protection
Product group:	Semiconductor Protection
Type description:	BS
Type (Legacy):	BS
Rated current:	100 A
Rated AC voltage:	690 V
Rated DC voltage:	350 V
Time-Current Characteristic:	aR
Breaking capacity AC:	100 kA
Breaking capacity DC:	100 kA
Application:	For protection of semiconductor devices
Power dissipation:	16 W
Operating joule integral (A2s):	6,800
Standards:	IEC 60269-4, BS88 Part 4

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



2D FILE



EPLAN FILE

ETIM

Size	Other
Breaking capacity	100 kA
Rated current	100 A
Utilization category	Other

Logistics

Product

Net depth	19.1 mm
Net weight of the product	0.059 kg
Net width	17 mm
Net height	77 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	3838895414124
Basic packaging weight	0.211 kg
Basic packaging volume	0.014 dm ³
Basic packaging quantity	5 pcs


Transport Packaging

Transport packaging weight	0.585 kg
Transport packaging volume	0.029 dm ³
Transport packaging quantity	10 pcs
Customs tariff	85361090
EAN code for a transport packaging	3838895361602
Pallet quantity	13,680 pcs

Dimension

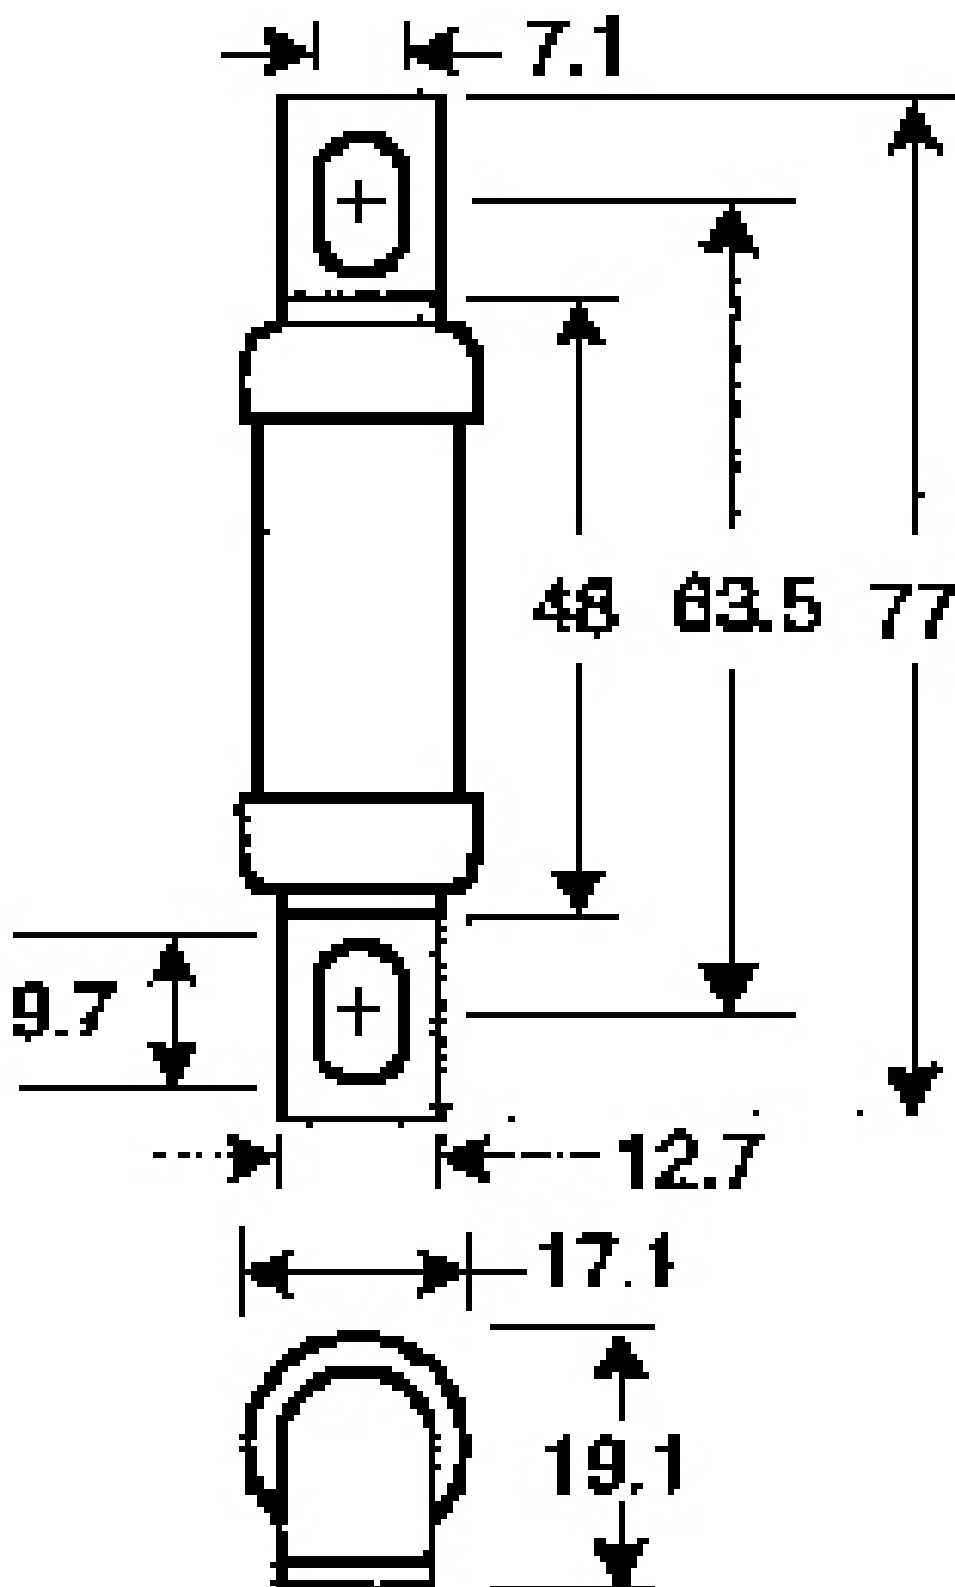

Energy characteristic

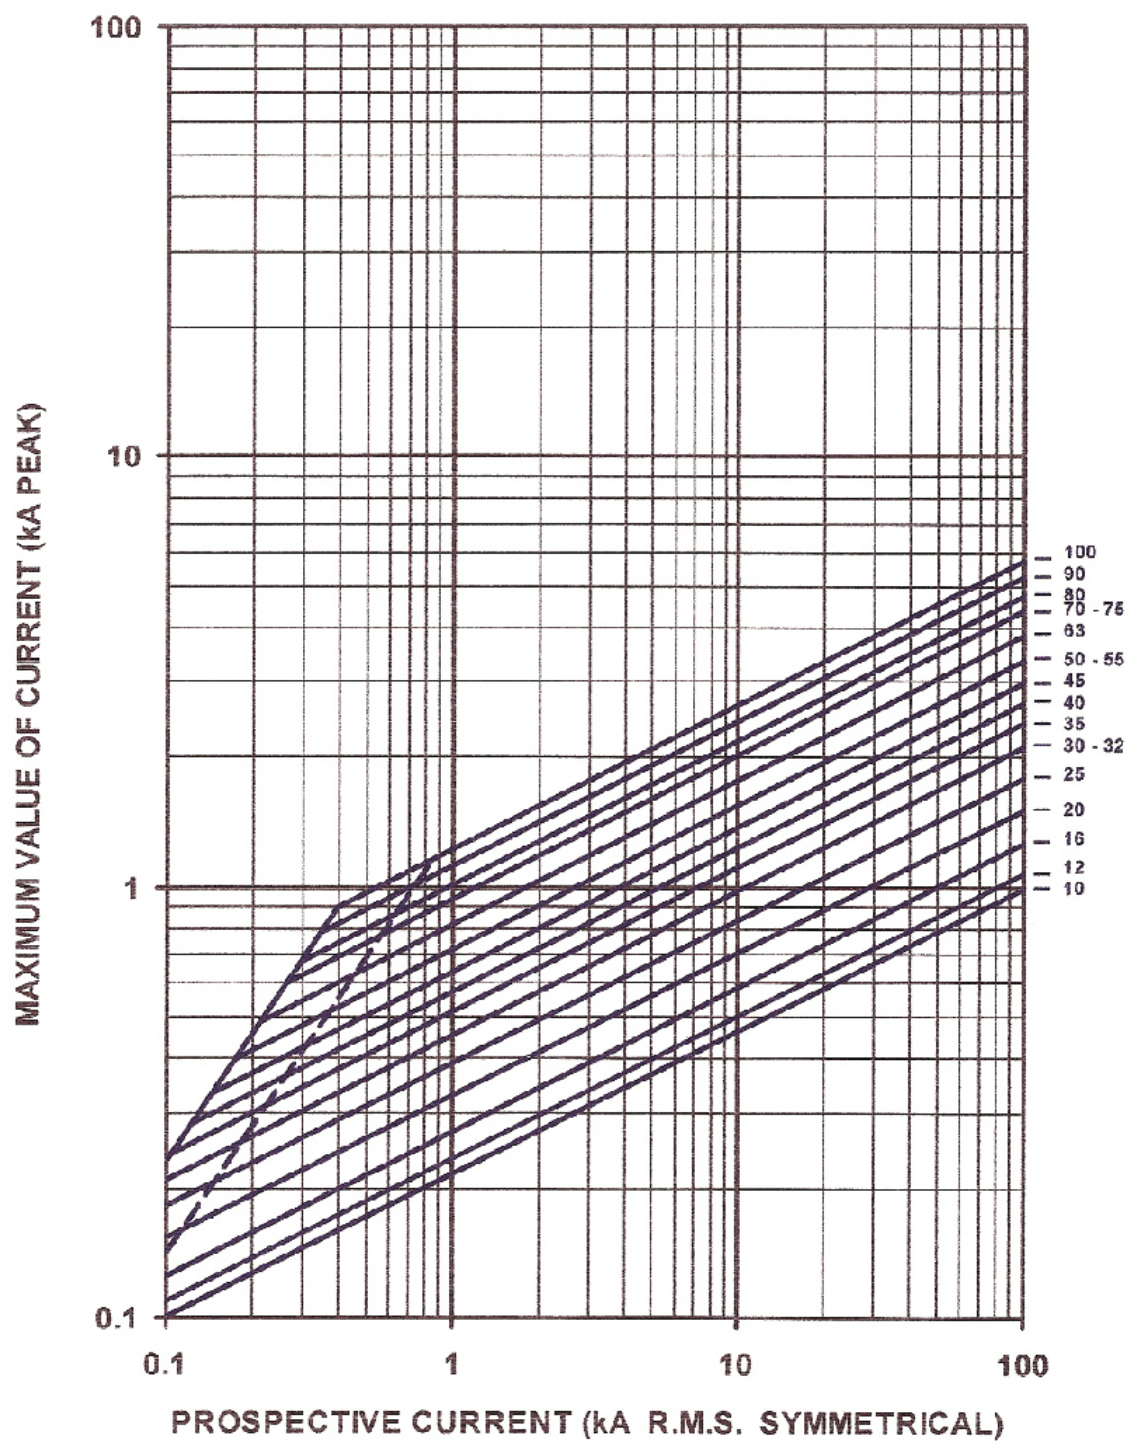

I/t characteristic

