

CS 63 10 U

Cam switch



ETI Code:	004773021
Type (Legacy):	0-1
Type of Installation:	Front mounting
Rated current:	63 A
Catalogue Group:	Rotary cam switch
Type description:	0-1
Number of poles:	3
Thermal current Ith:	63 A
Rated operational current Ie AC-21 at 400V:	63 A
Max. rated operational voltage (AC):	480 V
Rated Insulation Voltage:	690 V
Operation:	ON-OFF (0-1) switches with 60° switching angle

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Model	On/Off switch
Rated permanent current Iu	63 A
Type of control element	Turn button
Suitable for front mounting	Yes
Type of electrical connection of main circuit	Screw connection
Number of poles	3
With zero (off) position	Yes
Rated operation power at AC-3, 400 V	22 kW
Suitable for distribution board installation	Yes

Logistics

Product

Net depth	102.67 mm
Net weight of the product	0.415 kg
Net width	67.2 mm
Net height	68.8 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	3838895659563
Basic packaging weight	0.415 kg
Basic Packaging Dimensions Depth	83 mm
Basic Packaging Dimensions Height	113 mm
Basic packaging volume	1.276 dm³
Basic Packaging Dimensions Width	136 mm
Basic packaging quantity	1 pcs

Transport Packaging

Transport packaging weight	10.96 kg
Transport packaging volume	46.08 dm³
Transport packaging quantity	24 pcs
Customs tariff	85363030
Transport Packaging Dimensions Height	240 mm
Transport Packaging Dimensions Width	480 mm
Transport Packaging Dimensions Depth	400 mm
EAN code for a transport packaging	3838895659570
Pallet quantity	504 pcs

Dimension

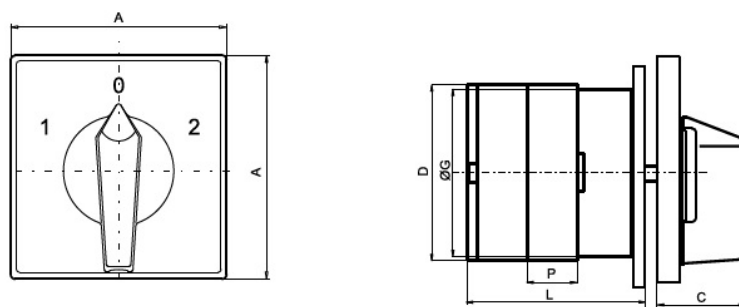

Type	Marking		Number of elements (L/mm)														
	A	C	D	ØG	P	1	2	3	4	5	6	7	8	9	10	11	12
CS 16	48	26	45,2	38,6	12,8	32,5	45,3	58,1	70,9	83,7	96,5	109,3	122,1	134,9	147,7	160,5	173,3
CS 25	48	26	45,2	38,6	12,8	32,5	45,3	58,1	70,9	83,7	96,5	109,3	122,1	134,9	147,7	160,5	173,3
CS 32	65	33	53	38,6	12,8	37	49,8	62,6	75,4	88,2	101	113,8	126,6	139,4	152,2	165	177,8
CS 40	65	33	61	56,4	17,5	50,6	68,1	85,6	103,1	120,6	138,1	155,6	173,1	190,6	208,1	225,6	243,1
CS 63	65	33	61	56,4	17,5	50,6	68,1	85,6	103,1	120,6	138,1	155,6	173,1	190,6	208,1	225,6	243,1
CS 80	90	41	84	80	25	67,5	92,5	117,5	142,5	167,5	192,5	217,5	242,5	267,5	292,5	317,5	342,5
CS 100	90	41	84	80	25	67,5	92,5	117,5	142,5	167,5	192,5	217,5	242,5	267,5	292,5	317,5	342,5