

CS 80 10 U LK

Cam switch



ETI Code:	004773072
Type (Legacy):	0-1 ES LK
Type of Installation:	Front mounting
Rated current:	80 A
Catalogue Group:	Rotary cam switch
Type description:	0-1 ES LK
Number of poles:	3
Thermal current Ith:	80 A
Rated operational current Ie AC-21 at 400V:	80 A
Max. rated operational voltage (AC):	480 V
Rated Insulation Voltage:	690 V
Operation:	General emergency ON-OFF (0-1) switches version LK with padlocking in "0"

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Model	Reverser
Rated permanent current Iu	80 A
Type of control element	Turn button
Suitable for front mounting	Yes
Type of electrical connection of main circuit	Frame clamp
Number of poles	3
With zero (off) position	Yes
Rated operation power at AC-3, 400 V	32 kW
Suitable for distribution board installation	Yes

Logistics

Product

Net depth	157.8 mm
Net weight of the product	0.64 kg
Net width	106 mm
Net height	106 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	3838895660583
Basic packaging weight	0.64 kg
Basic Packaging Dimensions Depth	111 mm
Basic Packaging Dimensions Height	144 mm
Basic packaging volume	1.774 dm³
Basic Packaging Dimensions Width	111 mm
Basic packaging quantity	1 pcs

Transport Packaging

Transport packaging weight	12.52 kg
Transport packaging volume	46.08 dm³
Transport packaging quantity	18 pcs
Customs tariff	85363030
Transport Packaging Dimensions Height	240 mm
Transport Packaging Dimensions Width	480 mm
Transport Packaging Dimensions Depth	400 mm
EAN code for a transport packaging	3838895660590
Pallet quantity	378 pcs

Dimension

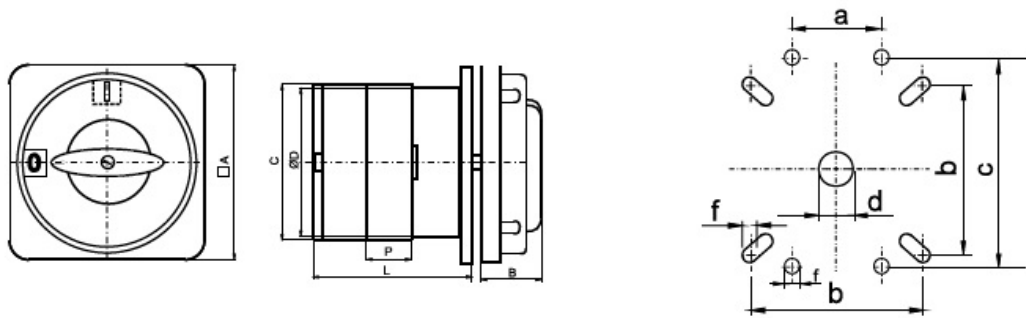

/(mm)	□A	C	ØD	P	B	L/2	b	d	f	a	c
CS 25 LK	49	45,2	38,6	12,8	35	45,3	36	10	3,2		
CS 32 LK	72	53	38,6	12,8	32	49,8	58	10	4,2		
CS 40 LK	72	61	56,4	17,5	32	68,1	58	10	4,2		
CS 50 LK	72	68,6	56,4	20,5	32	63	58	10	4,2		
CS 63 LK											
CS 80 LK	105	84	80	25	44	92,5	85	14	5,3		
CS 100 LK	130		110	39	62	100		18	5,3	30	90
CS 125 LK											
CS 200 LK											