

CS 16 53 U

Cam switch



ETI Code:	004773120
Type (Legacy):	1-0-2
Type of Installation:	Front mounting
Rated current:	16 A
Catalogue Group:	Rotary cam switch
Type description:	1-0-2
Number of poles:	3
Thermal current Ith:	16 A
Rated operational current Ie AC-21 at 400V:	16 A
Max. rated operational voltage (AC):	400 V
Rated Insulation Voltage:	690 V
Operation:	Changeover switches (1-0-2) with 60° switching ang

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Model	Level switch
Rated permanent current Iu	16 A
Type of control element	Turn button
Suitable for front mounting	Yes
Type of electrical connection of main circuit	Screw connection
Number of poles	3
With zero (off) position	Yes
Rated operation power at AC-3, 400 V	7.5 kW
Suitable for distribution board installation	Yes

Logistics

Product

Net depth	94.32 mm
Net weight of the product	0.14 kg
Net width	50.2 mm
Net height	69.3 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	3838895661542
Basic packaging weight	0.14 kg
Basic Packaging Dimensions Depth	58 mm
Basic Packaging Dimensions Height	124 mm
Basic packaging volume	0.417 dm³
Basic Packaging Dimensions Width	58 mm
Basic packaging quantity	1 pcs

Transport Packaging

Transport packaging weight	12.76 kg
Transport packaging volume	46.08 dm³
Transport packaging quantity	84 pcs
Customs tariff	85363030
Transport Packaging Dimensions Height	240 mm
Transport Packaging Dimensions Width	480 mm
Transport Packaging Dimensions Depth	400 mm
EAN code for a transport packaging	3838895661559
Pallet quantity	1,764 pcs

Dimension

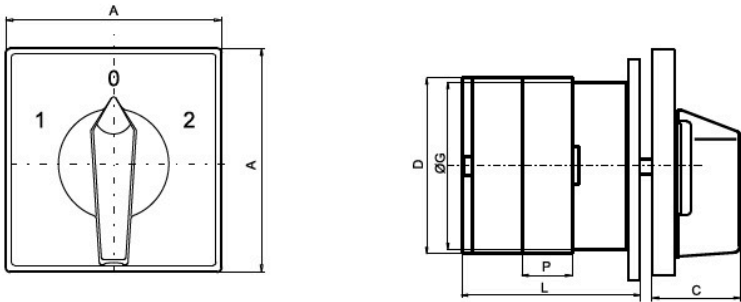

Type	Marking				Number of elements (L/mm)												
	A	C	D	ØG	P	1	2	3	4	5	6	7	8	9	10	11	12
CS 16	48	26	45,2	38,6	12,8	32,5	45,3	58,1	70,9	83,7	96,5	109,3	122,1	134,9	147,7	160,5	173,3
CS 25	48	26	45,2	38,6	12,8	32,5	45,3	58,1	70,9	83,7	96,5	109,3	122,1	134,9	147,7	160,5	173,3
CS 32	65	33	53	38,6	12,8	37	49,8	62,6	75,4	88,2	101	113,8	126,6	139,4	152,2	165	177,8
CS 40	65	33	61	56,4	17,5	50,6	68,1	85,6	103,1	120,6	138,1	155,6	173,1	190,6	208,1	225,6	243,1
CS 63	65	33	61	56,4	17,5	50,6	68,1	85,6	103,1	120,6	138,1	155,6	173,1	190,6	208,1	225,6	243,1
CS 80	90	41	84	80	25	67,5	92,5	117,5	142,5	167,5	192,5	217,5	242,5	267,5	292,5	317,5	342,5
CS 100	90	41	84	80	25	67,5	92,5	117,5	142,5	167,5	192,5	217,5	242,5	267,5	292,5	317,5	342,5