

CS 25 53 U

Cam switch



ETI Code:	004773121
Type (Legacy):	1-0-2
Type of Installation:	Front mounting
Rated current:	25 A
Catalogue Group:	Rotary cam switch
Type description:	1-0-2
Number of poles:	3
Thermal current Ith:	25 A
Rated operational current Ie AC-21 at 400V:	25 A
Max. rated operational voltage (AC):	480 V
Rated Insulation Voltage:	690 V
Operation:	Changeover switches (1-0-2) with 60° switching ang

[Online product page](#) 

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Model

Rated permanent current Iu

Type of control element

Suitable for front mounting

Type of electrical connection of main circuit

Number of poles

With zero (off) position

Rated operation power at AC-3, 400 V

Suitable for distribution board installation

Level switch

25 A

Turn button

Yes

Screw connection

3

Yes

11 kW

Yes

Logistics

Product

Net depth	94.32 mm
Net weight of the product	0.16 kg
Net width	50.2 mm
Net height	69.3 mm
Stock unit of measure	pcs


Basic Packaging

EAN code for a basic packaging	3838895661566
Basic packaging weight	0.16 kg
Basic Packaging Dimensions Depth	58 mm
Basic Packaging Dimensions Height	124 mm
Basic packaging volume	0.417 dm³
Basic Packaging Dimensions Width	58 mm
Basic packaging quantity	1 pcs

Transport Packaging

Transport packaging weight	14.44 kg
Transport packaging volume	46.08 dm³
Transport packaging quantity	84 pcs
Customs tariff	85363030
Transport Packaging Dimensions Height	240 mm
Transport Packaging Dimensions Width	480 mm
Transport Packaging Dimensions Depth	400 mm
EAN code for a transport packaging	3838895661573
Pallet quantity	1,764 pcs

Dimension

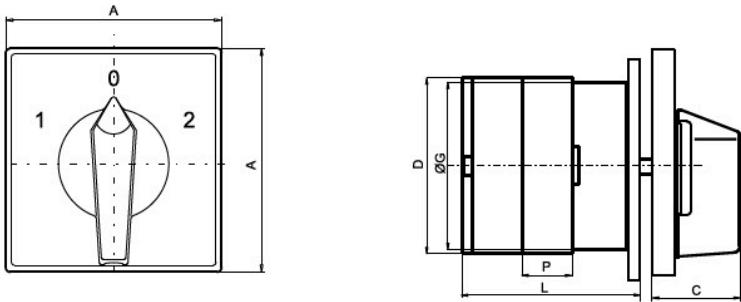

Type	Marking		Number of elements (L/mm)														
	A	C	D	ØG	P	1	2	3	4	5	6	7	8	9	10	11	12
CS 16	48	26	45,2	38,6	12,8	32,5	45,3	58,1	70,9	83,7	96,5	109,3	122,1	134,9	147,7	160,5	173,3
CS 25	48	26	45,2	38,6	12,8	32,5	45,3	58,1	70,9	83,7	96,5	109,3	122,1	134,9	147,7	160,5	173,3
CS 32	65	33	53	38,6	12,8	37	49,8	62,6	75,4	88,2	101	113,8	126,6	139,4	152,2	165	177,8
CS 40	65	33	61	56,4	17,5	50,6	68,1	85,6	103,1	120,6	138,1	155,6	173,1	190,6	208,1	225,6	243,1
CS 63	65	33	61	56,4	17,5	50,6	68,1	85,6	103,1	120,6	138,1	155,6	173,1	190,6	208,1	225,6	243,1
CS 80	90	41	84	80	25	67,5	92,5	117,5	142,5	167,5	192,5	217,5	242,5	267,5	292,5	317,5	342,5
CS 100	90	41	84	80	25	67,5	92,5	117,5	142,5	167,5	192,5	217,5	242,5	267,5	292,5	317,5	342,5