

# CS 25 15 U

## Cam switch



|                                             |                                        |
|---------------------------------------------|----------------------------------------|
| ETI Code:                                   | 004773128                              |
| Type (Legacy):                              | 0-START-1                              |
| Type of Installation:                       | Front mounting                         |
| Rated current:                              | 25 A                                   |
| Catalogue Group:                            | Rotary cam switch                      |
| Type description:                           | 0-START-1                              |
| Number of poles:                            | 2                                      |
| Thermal current Ith:                        | 25 A                                   |
| Rated operational current Ie AC-21 at 400V: | 25 A                                   |
| Max. rated operational voltage (AC):        | 480 V                                  |
| Rated Insulation Voltage:                   | 690 V                                  |
| Operation:                                  | Start and run switches-One phase motor |

[Online product page](#) 

## Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

## ETIM

Model  
Rated permanent current Iu  
Type of control element  
Suitable for front mounting  
Type of electrical connection of main circuit  
Number of poles  
With zero (off) position  
Rated operation power at AC-3, 400 V  
Suitable for distribution board installation

**Reverser**  
**25 A**  
**Turn button**  
**Yes**  
**Screw connection**  
**2**  
**Yes**  
**11 kW**  
**Yes**

## Logistics

### Product

|                           |                 |
|---------------------------|-----------------|
| Net depth                 | <b>94.32 mm</b> |
| Net weight of the product | <b>0.11 kg</b>  |
| Net width                 | <b>50.2 mm</b>  |
| Net height                | <b>69.3 mm</b>  |
| Stock unit of measure     | <b>pcs</b>      |


### Basic Packaging

|                                   |                            |
|-----------------------------------|----------------------------|
| EAN code for a basic packaging    | <b>3838895661702</b>       |
| Basic packaging weight            | <b>0.11 kg</b>             |
| Basic Packaging Dimensions Depth  | <b>58 mm</b>               |
| Basic Packaging Dimensions Height | <b>95 mm</b>               |
| Basic packaging volume            | <b>0.32 dm<sup>3</sup></b> |
| Basic Packaging Dimensions Width  | <b>58 mm</b>               |
| Basic packaging quantity          | <b>1 pcs</b>               |

### Transport Packaging

|                                       |                             |
|---------------------------------------|-----------------------------|
| Transport packaging weight            | <b>12 kg</b>                |
| Transport packaging volume            | <b>46.08 dm<sup>3</sup></b> |
| Transport packaging quantity          | <b>100 pcs</b>              |
| Customs tariff                        | <b>85363030</b>             |
| Transport Packaging Dimensions Height | <b>240 mm</b>               |
| Transport Packaging Dimensions Width  | <b>480 mm</b>               |
| Transport Packaging Dimensions Depth  | <b>400 mm</b>               |
| EAN code for a transport packaging    | <b>3838895661719</b>        |
| Pallet quantity                       | <b>2,100 pcs</b>            |

## Dimension

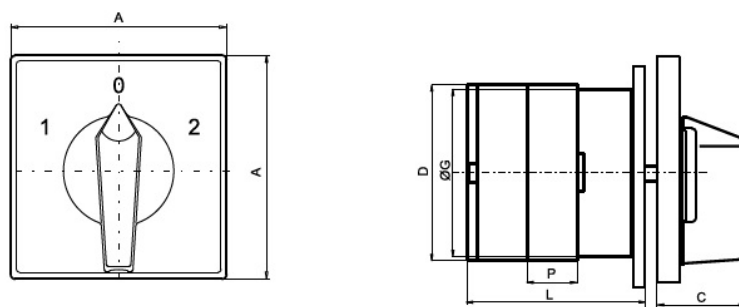

| Type   | Marking |    | Number of elements (L/mm) |      |      |      |      |       |       |       |       |       |       |       |       |       |       |
|--------|---------|----|---------------------------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|        | A       | C  | D                         | ØG   | P    | 1    | 2    | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | 11    | 12    |
| CS 16  | 48      | 26 | 45,2                      | 38,6 | 12,8 | 32,5 | 45,3 | 58,1  | 70,9  | 83,7  | 96,5  | 109,3 | 122,1 | 134,9 | 147,7 | 160,5 | 173,3 |
| CS 25  | 48      | 26 | 45,2                      | 38,6 | 12,8 | 32,5 | 45,3 | 58,1  | 70,9  | 83,7  | 96,5  | 109,3 | 122,1 | 134,9 | 147,7 | 160,5 | 173,3 |
| CS 32  | 65      | 33 | 53                        | 38,6 | 12,8 | 37   | 49,8 | 62,6  | 75,4  | 88,2  | 101   | 113,8 | 126,6 | 139,4 | 152,2 | 165   | 177,8 |
| CS 40  | 65      | 33 | 61                        | 56,4 | 17,5 | 50,6 | 68,1 | 85,6  | 103,1 | 120,6 | 138,1 | 155,6 | 173,1 | 190,6 | 208,1 | 225,6 | 243,1 |
| CS 63  | 65      | 33 | 61                        | 56,4 | 17,5 | 50,6 | 68,1 | 85,6  | 103,1 | 120,6 | 138,1 | 155,6 | 173,1 | 190,6 | 208,1 | 225,6 | 243,1 |
| CS 80  | 90      | 41 | 84                        | 80   | 25   | 67,5 | 92,5 | 117,5 | 142,5 | 167,5 | 192,5 | 217,5 | 242,5 | 267,5 | 292,5 | 317,5 | 342,5 |
| CS 100 | 90      | 41 | 84                        | 80   | 25   | 67,5 | 92,5 | 117,5 | 142,5 | 167,5 | 192,5 | 217,5 | 242,5 | 267,5 | 292,5 | 317,5 | 342,5 |