

Bušilica pneumatska sa ručkom

1515H



Profili




Opis proizvoda

- dvosmerna
- 800 o/min u slobodnom hodu
- max. pritisak vazduha: 6, 2 bara
- potrošnja vazduha: 113 l/min
- priključak za vazduh: 1/4"
- kapacitet glave: 1,5-13 mm
- navoj glave 3/8", 24 UNF
- unutrašnji prečnik cevi: 10 mm

Prednosti:

- izuzetna snaga
- lagana, kompaktna i lako upravljiva

- podesiva drška za bolji prihvatač
- pogodno pozicioniran prekidač
- ergonomski oblikovana drška za rad bez napora
- plastična zaštita drške za ublažavanje vibracija
- obrtanje u oba smera (levo/desno)
- brzostezna glava

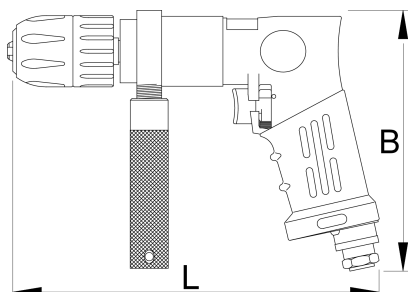

	L	B	
617727	220	150	1570

* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

Upotreba (slike)



Slika (slike)



Dodatna oprema



Spojnica muška



Spojnica muška



Spojnica ženska



Spojnica ženska



Pripremna grupa za pneumatski alat 3/8"



Pripremna grupa za pneumatski alat 1/2"



Crevo spiralno za vazduh

Pravilna upotreba



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.