

# Sečice kose

466/4G



## Profili




## Standardi

DIN ISO 5749

## Opis proizvoda

- materijal: premium plus alatni čelik
- kovane, potpuno poboljšane i ojačane
- rezne ivice induktivno kaljene
- čeljusti fino brušene
- površina fosfatirana ISO 9717
- robusne ručke obložene plastičnim navlakama
- izrađene prema standardu ISO 5749

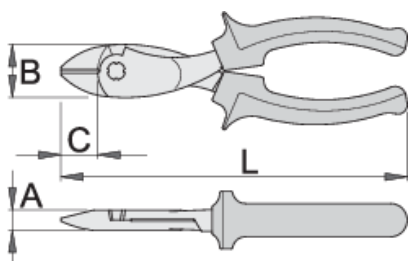

|  | L   | B  | A  | C  |  |
|---------------------------------------------------------------------------------|-----|----|----|----|------------------------------------------------------------------------------------|
| 608700                                                                          | 180 | 28 | 11 | 20 | 313                                                                                |
| 609190                                                                          | 200 | 27 | 11 | 21 | 344                                                                                |

kapacitet sečenja (10N=1kg)

|  | L   | max 2150 N/mm² Ø↑ | max 750 N/mm² Ø↑ |
|----------------------------------------------------------------------------------|-----|-------------------|------------------|
| 608700                                                                           | 180 | 1,8               | 3,0              |
| 609190                                                                           | 200 | 2,0               | 3,5              |

\* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

Slika (slike)

