

SPECIFICATION SHEET

TEHNIČKI LIST




COLLECTION
SERIJA

STERN

PRODUCT CODE
ŠIFRA PROIZVODA

AS292200

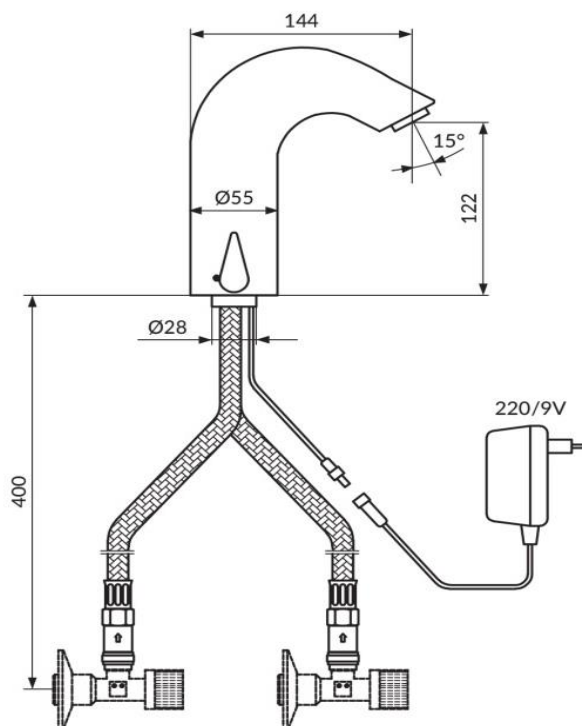

TEHNIČKI PODACI

Stojeća montaža
Robusna konstrukcija
NEOPERL® PERLATOR® CASCADE® SLC
Podešavanje mešanja na telu baterije
Mešajući ventil sa nepovratnim ventilima
Napajanje : Ispravljač 220V na 9V
Fiksni izliv

TECHNICAL DETAILS

Standing mounted tap
Roboust construction
Aerator NEOPERL® PERLATOR® CASCADE® SLC
Mixing adjustment on the body of the faucet
Mixing valve with non-return valves
Power supply : 220V/9V transformer
Fixed spout

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 70°C
Preporučena temperatura vode: 50°C

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 70°C
Suggested max. water temperature : 50°C

email : info@rosan.rs

www.rosan.rs

