

SPECIFICATION SHEET

TEHNIČKI LIST




COLLECTION
SERIJA

KING

PRODUCT CODE
ŠIFRA PROIZVODA

J371252

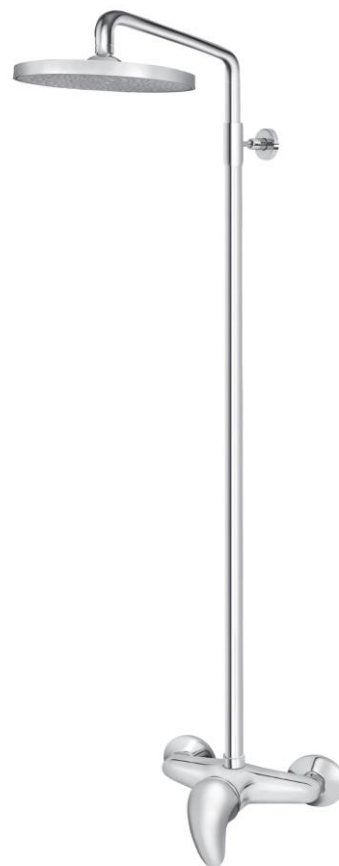

TEHNIČKI PODACI

Jednoručna baterija
Zidna montaža
Keramički mešač KEROX® 40 HWS
Podesivi usponski tuš
Zglobna tuš ruža D. 200mm
Heavy Duty ekscentar kolena
Hromirane rozete

TECHNICAL DETAILS

Single lever mixer
Wall mounted
Ceramic cartridge KEROX®40 HWS
Adjustable height stand pipe shower
Shower head D. 200mm
Heavy Duty eccentric connectors
Chromed rossete

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 70°C
Preporučena temperatura vode: 50°C

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 70°C
Suggested max. water temperature : 50°C

email : info@rosan.rs

www.rosan.rs

