

SPECIFICATION SHEET

TEHNIČKI LIST




COLLECTION
SERIJA

KLASIK

PRODUCT CODE
ŠIFRA PROIZVODA

K11101

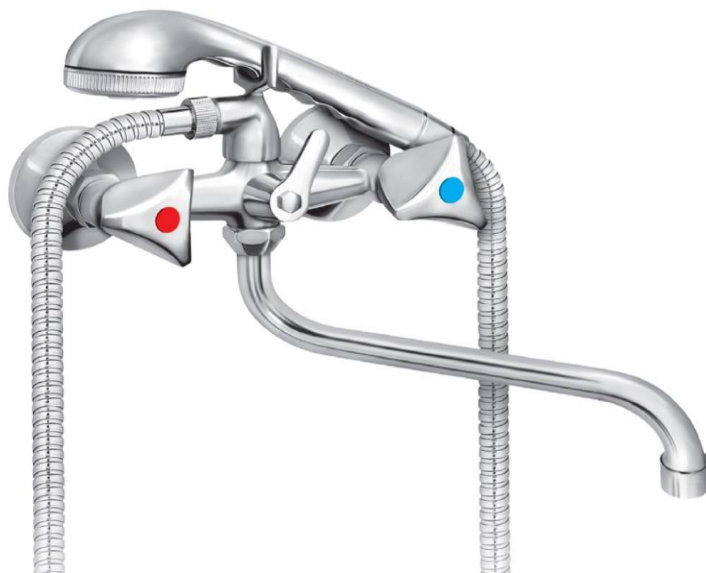

TEHNIČKI PODACI

Dvoručna baterija
Zidna montaža
Regulacija protoka do 5 lit/min na tušu
Kompresioni gornji deo sa masnom komorom 1/2"
Metalni trokraki rukohvat
Duplo pleteno tuš crevo 1.5m
Ručni tuš
Ručni prebacivač
Pokretni izliv 300mm
Heavy Duty ekscentar kolena
Hromirane rozete

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 70°C
Preporučena temperatura vode: 50°C

TECHNICAL DETAILS

Two handle mixer
Wall mounted
Flow regulation on shower up to 5 lit/min
Compression cartridge with grease chamber 1/2"
Metal triangle handle
Double lock shower hose 1.5m
Hand shower
Manual diverter
Swivel spout 300mm
Heavy Duty eccentric connectors
Chromed rossettes

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 70°C
Suggested max. water temperature : 50°C

email : info@rosan.rs

www.rosan.rs

