

WIDE OPENING ADJUSTABLES WRENCHES



EGA Master manufactures the widest range of adjustable wrenches in the world, featuring different sizes, types, and exclusive global innovations: adjustable, combi, quick-action, with or without Comfort handle, side knurl, 1000V insulated, left-handed, wide mouth, Titacrom® or phosphated.



1. Plumbingwrench: Maximum jaw opening and minimum thickness for optimal operability in confined spaces.




2. Available in Titacrom or phosphated finish.

3. Available with or without a bi-component, non-slip Comfort handle for maximum comfort and great appeal.

4. Reinforced design for heavy-duty work that multiplies its tightening strength.

TITACROM®

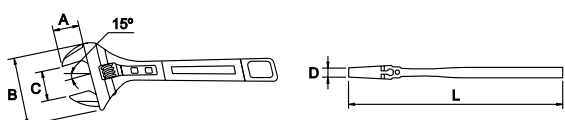


COD.	L (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)	g	10	•
61229	6	150	28	60	35	6	180		
61213	8	200	33	75	41	6,5	430		

TITACROM® | Registered model

TECHNICAL SPECIFICATIONS	
MATERIAL	Special steel
HARDNESS	40-50 HRC
FINISHING	Titacrom®

TITACROM® COMFORT

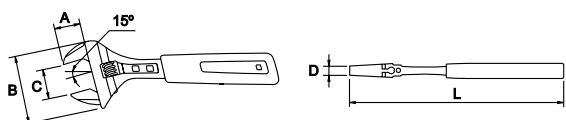


COD.	L (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)			
61230	6	150	28	60	35	6	195		
61214	8	200	33	75	41	6,5	450	10	●

TITACROM® COMFORT | Registered model

TECHNICAL SPECIFICATIONS

MATERIAL	Special steel
HARDNESS	40-50 HRc
FINISHING	Titacrom®

PHOSPHATED




COD.	L (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)			
61231	6	150	28	60	35	6	180		
61215	8	200	33	75	41	6,5	430	10	●

Registered model

TECHNICAL SPECIFICATIONS

MATERIAL	Special steel
HARDNESS	40-50 HRc
FINISHING	Phosphated

PHOSPHATED COMFORT



COD.	L (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)			
61232	6	150	28	60	35	6	195		
61216	8	200	33	75	41	6,5	450	10	●

COMFORT | Registered model

TECHNICAL SPECIFICATIONS

MATERIAL	Special steel
HARDNESS	40-50 HRc
FINISHING	Phosphated

SPARE PARTS

COD.	Description	COD.	Description	Valid for
81966	Axle	81965	Nut	61230, 61231, 61232
81968		81967		61213, 61214, 61215, 61216, 61237, 61238, 61239, 61240