

BASQUE COMBI PLUMBINGWRENCH




EGA Master manufactures the widest range of adjustable wrenches in the world, with all kinds of sizes, types, and exclusive innovations: adjustable, combi, quick action, with or without Comfort handle, with lateral nut, 1000V safety insulated, left turn, wide opening , Titacrom® or phosphated.




1. Combi system for working with polygonal elements, pipes or rounded-off nuts.

2. Quick action system enables fast positioning.

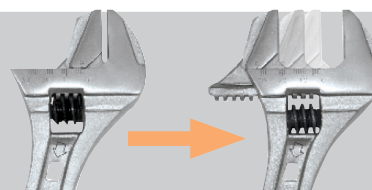

3. Plumbingwrench: Maximum opening and minimum jaw thickness for best accessibility.




4. Comfort bi-component anti-slippery handle for best comfortability and great attractive design.

5. Heavy Duty Performance to provide maximum resistance to high torque.

6. Worldwide patent.

TITACROM




COD.	L (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	g	10	●
61221	8	200	33	75	41	6,5	1.1/4	430	10	●

TITACROM® | Worldwide patent

TECHNICAL SPECIFICATION	
MATERIAL	Special steel
HARDNESS	40-50 HRC
FINISHING	Titacrom®

TITACROM COMFORT

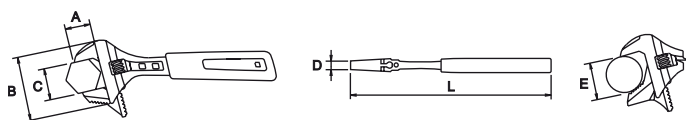


COD.	L (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)			
61222	8	200	33	75	41	6,5	1.1/4	450	10	●

 **TITACROM® COMFORT** | Worldwide patent

TECHNICAL SPECIFICATION		
MATERIAL	Wrench	Special Steel
	Handle	PVC
HARDNESS	40-50 HRc.	
FINISHING	Wrench	Titacrom®
	Handle	Black

PHOSPHATED




COD.	L (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)			
61223	8	200	33	75	41	6,5	1.1/4	430	10	●

 | Worldwide patent

TECHNICAL SPECIFICATION		
MATERIAL	Special steel	
HARDNESS	40-50 HRc	
FINISHING	Phosphated	

PHOSPHATED COMFORT

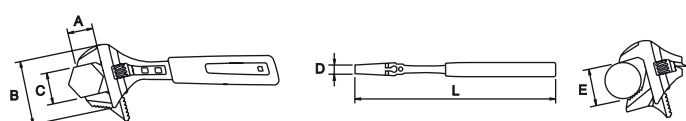

COD.	L (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)			
61224	8	200	33	75	41	6,5	1.1/4	450	10	●

 **COMFORT** | Worldwide patent

TECHNICAL SPECIFICATION		
MATERIAL	Wrench	Special Steel
	Handle	PVC
HARDNESS	40-50 HRc.	
FINISHING	Wrench	Phosphated
	Handle	Black

SPARE PARTS

COD.	Description	COD.	Description	Valid for
81033	Axle	81967	Nut	61221, 61222, 61223, 61224