


SCREWDRIVERS MASTERTORK 1000V

EGA Master insulated tools comply with IEC 60900 regulations, all of which are subject to a dielectric test at 10,000V (i.e. at an intensity 10 times greater than that certified).


The tools are also subject to adhesion, dielectric penetration, impact and flame spread tests, in accordance with the rigorous European standard.



MASTERTORK
Medal International
Salon of Invention,
Paris 2007

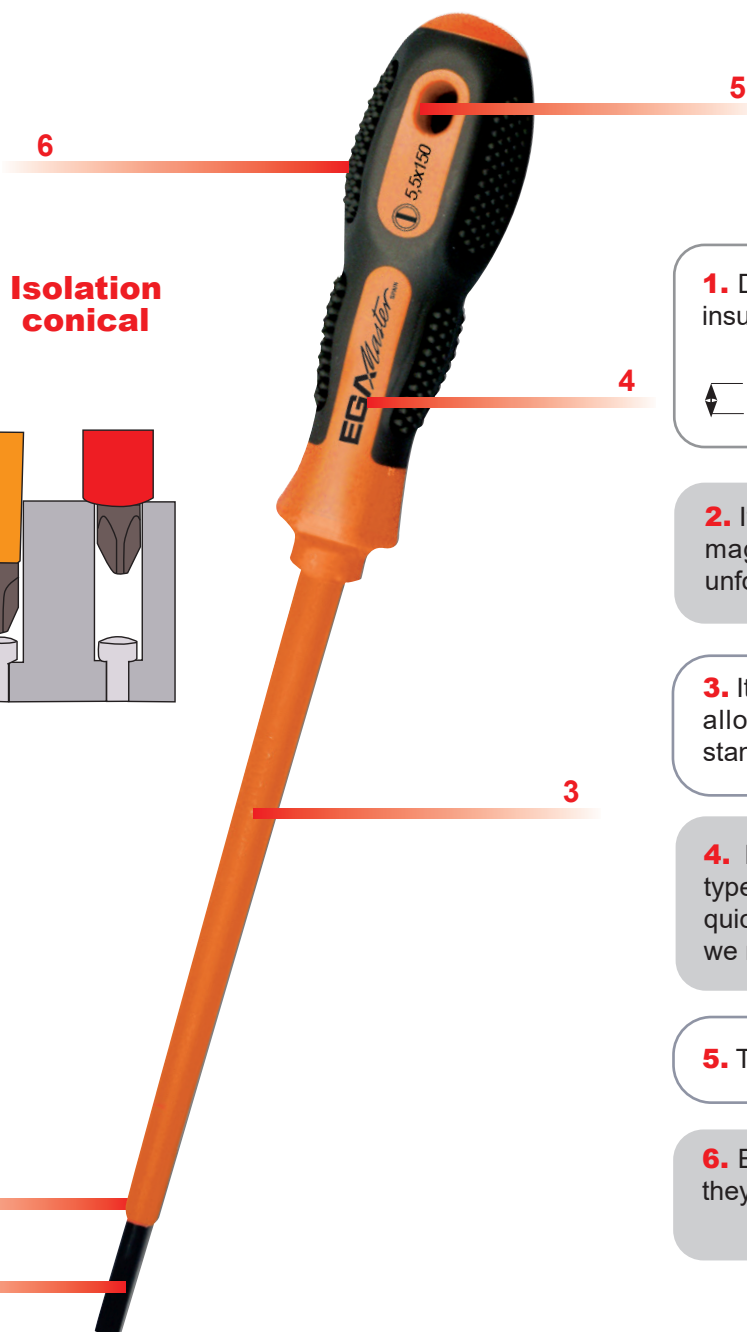

**Isolation
conical**



1. Designed to access tighter spaces thanks to its conical insulation, which provides a lower thickness at the tip.



2. Its innovative anti-slip tip system and magnetic facilitates positioning and prevents unforeseen landslides.

3. Its exclusive chrome-molybdenum alloy rod Vanadium allows tightening 30% higher than that of standard screwdrivers.

4. Double vertical and frontal marking of type and size facilitates identification quick screwdriver that we need to employ.




5. The hole in the handle allows for leverage.



6. Equipped with wider ergonomic and non-slip handles, they offer superior grip preventing slipping.

ELECTRICIAN

MM

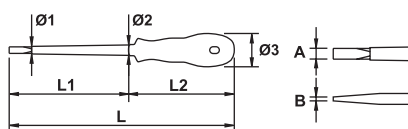


COD.	A (mm)	B (mm)	Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)			
76620	2,5	0,4				160	75				
76621	3	0,5	4,4	6,1	26	185	100	85	16		●
76734	3,5	0,6									
76622	4	0,8	5,4	7		230	125			●	●
76623	5,5	1	6,4	8,8	34	255		105	8		●
76624	6,5	1,2	8,4	11	36	265	150	115			
76625	8	1,6	9,4	12,3	40	305	175	130	6	-	-
76627	10	1,6	11,4	15		330	200				

1000V | IEC 60900 | DIN ISO 2380 | Registered model



INCH

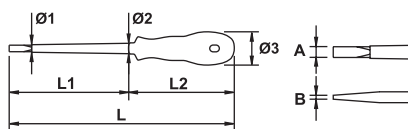


COD.	A (inch)	B (inch)	Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (inch)	L2 (mm)			
75063	3/32	0,016	4,4	6,1	26	160	3	85	16		●
75064	1/8	0,02				185	4				
75065	5/32	0,032	5,4	7		230	5	105	8		
75066	7/32	0,04	6,4	8,8	34	255				●	
75067							6	115			
75068	1/4	0,046	8,4	11	36	265					
75069	5/16		9,4	12,3	40	305	7	130	6	-	-
75081	25/64	0,063	11,4	15		330	8				

1000V | IEC 60900 | DIN ISO 2380 | Registered model



ULTRA SLIM




COD.	A (mm)	B (mm)	Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)			
76074	3.5	0.6	3.5	6.5	26	160	75	85	16		●
76075	4	0.8	4	7	34	205	100	105	8	●	●
76076	5.5	1	5.5	8.5		230	125			●	
76077	6.5	1.2	6.5	9.5	36	265	150	150	6	-	-

1000V | IEC 60900 | DIN ISO 2380 | Registered model



PHILLIPS®*




COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)			
76628	PH-0	4,4	5	26	145	60	85	16		●
76738	PH-1	6,4	7,6	34	185	80	105	8		●
76629	PH-2	7,4	9,6	36	205	100	115		●	
76630	PH-3	9,4	12,3	40	280	150	130	6		-
76631	PH-4				330	200				

1000V | IEC 60900 | DIN ISO 8764 | Registered model



ULTRA SLIM

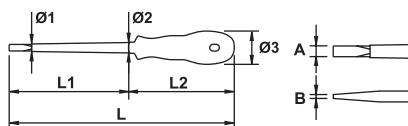


COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)		
76078	PH-1	5	7,9	34	230	125	108	●	-
76079	PH-2	6	8,9	36	240		115		

1000V | IEC 60900 | DIN ISO 2380 | Registered model



SLOTTED-PHILLIPS®* FOR TERMINAL SCREWS




COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)		
79163	PH-1	6,4	7,6	34	205	100	105	8	●
79164	PH-2	7,4	9,6	36	240	125	115	6	

1000V | IEC 60900 | Registered model



POZIDRIV®*




COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)			
76633	PZ-0	4,4	5	26	145	60	85	16		●
76634	PZ-1	6,4	7,6	34	205	100	105	8		●
76635	PZ-2	7,4	9,6	36	240	125	115		●	
76636	PZ-3	9,4	12,3	40	280	150	130	6		-
76637	PZ-4				330	200				

1000V | IEC 60900 | DIN ISO 8764 | Registered model



ULTRA SLIM

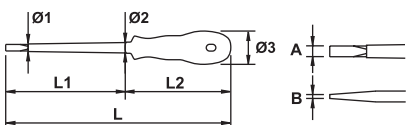


COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)			
76080	PZ-1	5	8	34	230	125	105	8	●	
76081	PZ-2	6	9	36	260		115	6		-

1000V | IEC 60900 | DIN ISO 2380 | Registered model



SLOTTED-POZIDRIV®* FOR TERMINAL SCREWS




COD.			Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)		
79165		PZ-1	6,4	7,6	34	205	100	105	8	
79166		PZ-2	7,4	9,6	36	240	125	115	6	

1000V IEC 60900 Registered model



TORX®*




COD.			Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)		
76638	T-6			8		135	50			
76639	T-7									
76640	T-8	4,4		26				85		
76641	T-9			5		160	75		16	
76642	T-10					180				
76643	T-15									
76644	T-20	5,8		8	34	205	100	105		
76645	T-25									
76646	T-27	6,4		9,6		220	115		8	
76647	T-30	7,4		36		240	125	115		
76648	T-40	8,7				255				
76649	T-45	9,4		12,3	40	280	150	128	6	
76650	T-50	11,4		15		305	175			

1000V IEC 60900 Registered model



TAMPER TORX




COD.			Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)		
75037	TT-6			8		135	50			
75038	TT-7									
75039	TT-8	4,4		26				85		
75040	TT-9			5		160	75		16	
75041	TT-10					180				
75042	TT-15									
75043	TT-20	5,8		8	34	205	100	105		
75044	TT-25									
75045	TT-27	6,4		9,6		220	115		8	
75046	TT-30	7,4		36		240	125	115		
75047	TT-40	8,7				255				
75048	TT-45	9,4		12,3	40	280	150	128	6	
75049	TT-50	11,4		15		305	175			

1000V IEC 60900 Registered model



SOCKET SCREWDRIVER

MM




COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)		
74698	4								
74699	5	11	7,5	34	255	150	105	8	
74700	5,5								
74701	6	12,5	8,5	36	275	160	115		
74702	7				290				
74703	8								
74704	9	16	10,5						
74705	10					175		6	
74706	11	19		40	305		130		
74707	12		11,5						
74708	13	21							
74709	14								

  1000V | IEC 60900 | Registered model



INCH



COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (inch)	L2 (mm)		
75132	5/32								
74984	3/16	11	7,5	34	255	6	105	8	
75133	7/32								
74985	1/4	12,5	8,5	36	275		115		
74986	5/16								
74987	3/8	16	10,5						
75136	25/64			40	305	7	130	6	
74988	7/16	19							
75138	15/32		11,5						
74989	1/2	21							

  1000V | IEC 60900 | Registered model



MM

COD.							
74664	9	11	130	115	6		•
74665	10						

  1000V | IEC 60900



MAGNETIC BIT HOLDER SCREWDRIVER


COD.		L (mm)			
76737	1/4	210	120	6	•

  1000V | IEC 60900



HEXAGONAL ALLEN

MM




COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (mm)	L2 (mm)		
74710	2,5	4,4	6		160	75		16	
74711	3			26			85		
74712	4	5,8	8		185	100		8	•
74713	5	6,4			205		105		
74714	6	7,8	11,2	34	230	125		6	
74715	8	9,8	13,4	40	280	150	130		-

  1000V | ICE 60900 | Registered model



INCH



COD.		Ø 1 (mm)	Ø 2 (mm)	Ø 3 (mm)	L (mm)	L1 (inch)	L2 (mm)		
75083	1/8	4,4	6		160	3	85	16	
75084	5/32	5,8	8		185	4		8	•
75131	13/64	6,4		34	205		105		
75097	5/16	9,8	13,4	40	280	6	130	6	-

  1000V | ICE 60900 | Registered model



TECHNICAL CHARACTERISTICS

MATERIAL

ROD: Chromium-Molybdenum-Vanadium (Cr-V)

HARDNESS

ROD: 52-56HRC

FINISH: PVC Orange color