



*CH10x38 gG 4A/500V

Fuse link

ETI Code:	002620003
Catalogue Group:	C low Voltage cylindrical fuses
Fuse type:	CH
Product group:	C low Voltage cylindrical fuses
Type description:	CH
Type (Legacy):	CH
Size:	10x38
Rated current:	4 A
Rated AC voltage:	500 V
Time-Current Characteristic:	gG
Breaking capacity AC:	100 kA
Application:	For cable protection
Power dissipation:	1.4 W
Standards:	IEC 60269-1, IEC 60269-2

Online product page [🔗](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



CERTIFICATE



2D FILE



3D FILE



EPLAN FILE

ETIM

Size	10x38 mm
Breaking capacity	100 kA
Utilization category	Other

Logistics

Product

Net depth	10.3 mm
Net weight of the product	7.6 g
Net width	10.3 mm
Net height	38 mm
Stock unit of measure	pcs
EAN code for a single product	3838895581581


Basic Packaging

EAN code for a basic packaging	3838895137672
Basic packaging weight	0.08 kg
Basic packaging volume	0.042 dm³
Basic packaging quantity	10 pcs


Transport Packaging

Transport packaging weight	4.1 kg
Transport packaging volume	3.386 dm³
Transport packaging quantity	500 pcs
Customs tariff	85361010
EAN code for a transport packaging	3838895164968
Pallet quantity	84,000 pcs


I/t characteristic

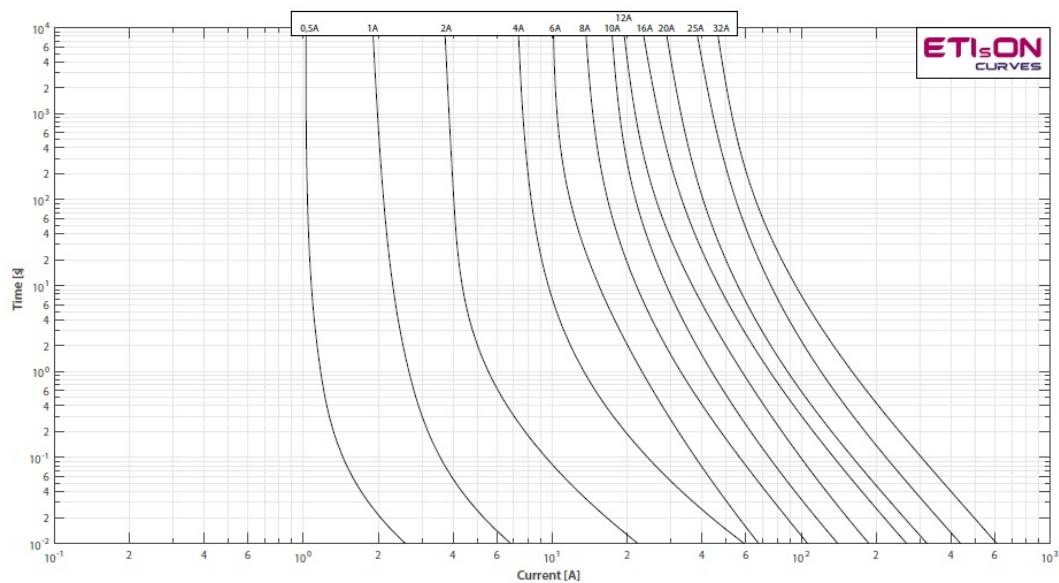

CutOff

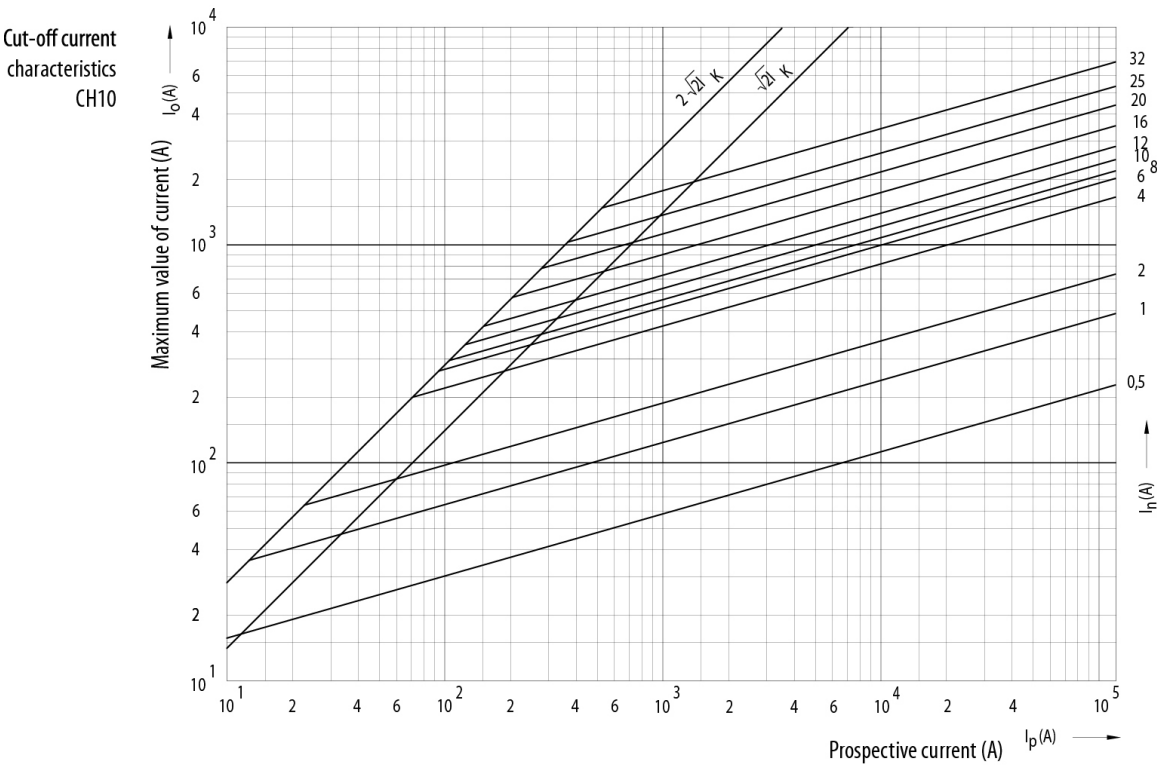

Dimension

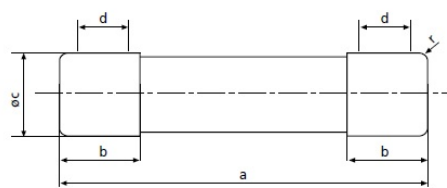

size	a	b _{max}	c	d _{min}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1

Energy characteristic

