



VVC3 36kV/2A

Fuse link

ETI Code:	004260003
Type description:	NEW VVC 50N striker
Breaking capacity AC:	315 kA
Rated minimum breaking current:	12 A
Rated AC voltage:	36000 V
Cold resistance:	2,900 mΩ
Rated current:	2 A
Power dissipation:	17 W
Fuse type:	NEW VVC 50N striker
Size:	537
Indicator:	50N striker force
Type (Legacy):	NEW VVC 50N striker

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



2D FILE



3D FILE



EPLAN FILE

ETIM

Performance category according to IEC 60282-1

Voltage type

Application

With striker

Installation technique

Rated frequency(Min)

Standard

Rated frequency(Max)

Length

Breaking capacity

Diameter

Rated voltage

Rated current

Utilization category

Back-up

AC

Other

Yes

Air

45 Hz

IEC

60 Hz

537 mm

31.5 kA

53 mm

36 kV

2 A

Other

Logistics


Product

Net depth	56 mm
Net weight of the product	2.85 kg
Net width	56 mm
Net height	603 mm
Stock unit of measure	pcs
EAN code for a single product	3838895918899


Transport Packaging

Transport packaging weight	9.07 kg
Transport packaging volume	0.027 m³
Transport packaging quantity	3 pcs
Customs tariff	85351000
Transport Packaging Dimensions Height	0.12 m
Transport Packaging Dimensions Width	0.64 m
Transport Packaging Dimensions Depth	0.35 m
EAN code for a transport packaging	3838895918905
Pallet quantity	54 pcs

I/t characteristic

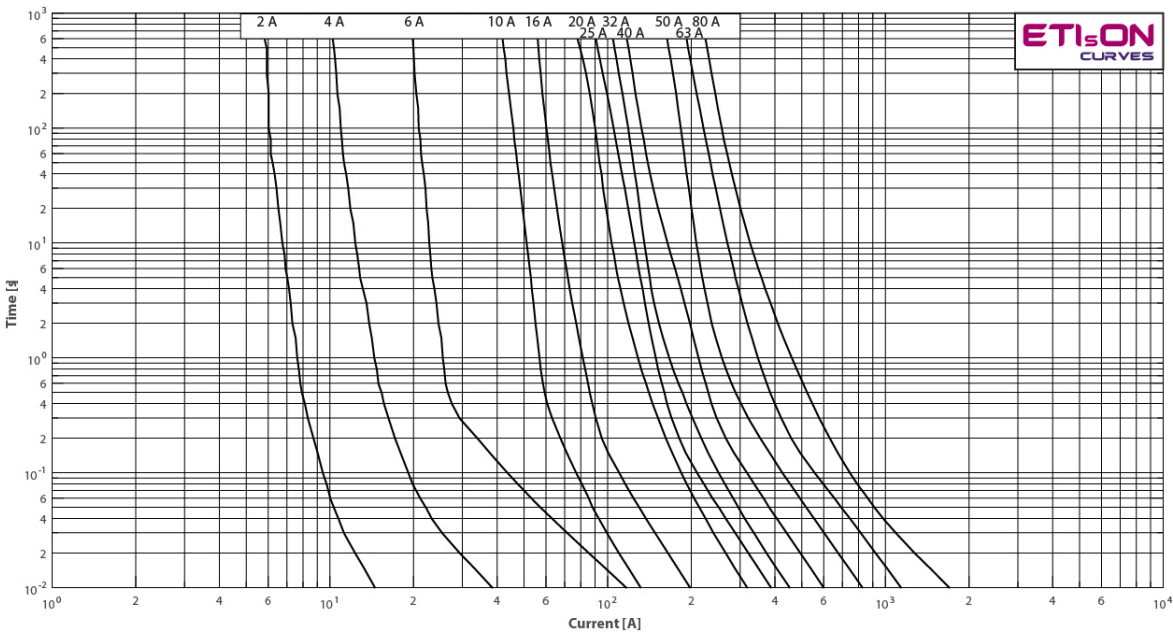

CutOff

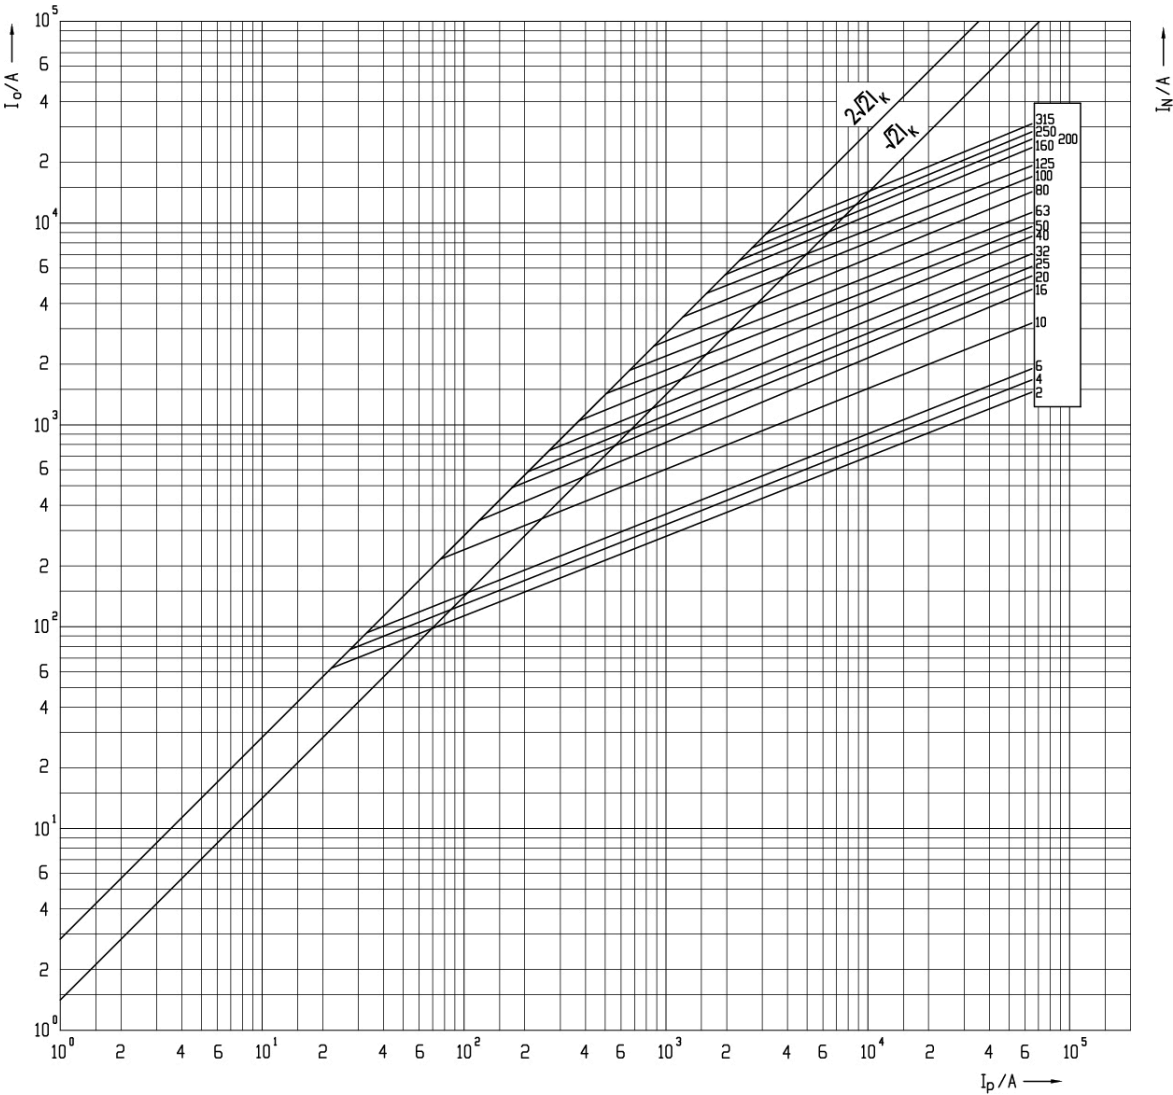

Dimension

