

COILPRO90, COILNAILER




This pneumatic CoilPro90 coilnailer runs both wire and plastic collated nails ranging from 2,5 to 3,3mm in diameter and 45 to 90mm in length. This Pro Series coilnailer can span a wide range of applications from framing and siding to sub-flooring and decks.

Technical specifications

Magazine capacity	300 pieces
Operating pressure	4,8-8,3 bar
Firing mode	Dual
Air consumption (at 60 shots per minute)	157 l/m

Fastener specification

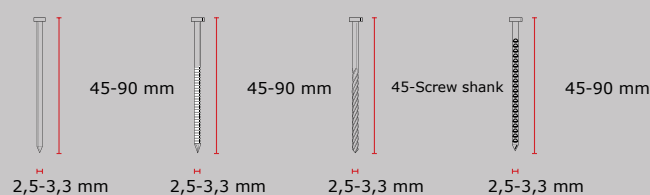

Applications

Roofs, Decking, Cladding, Sub-flooring, Pallet and crates, Timber frame construction



Features & Benefits

- Selectable trigger
- Adjustable depth of drive
- Well balanced and lightweight
- Nose with saw tooth for more grip
- Guide body improvement for better nail guidance
- Upgraded safety, driver, magazine and nose piece



Description

CoilPro90, coilnailer, dual

Art. Nr.

1VS2001N

EAN code

8715274180755

FASTENERS



Description	Finish	Art. Nr.
Smooth shank coilnail galvanized 2,5x50mm	Sencoted	BD21AABF
Ring shank coilnail galvanized 2,5x45mm	Sencoted	BL19AABC
Ring shank coilnail galvanized 2,5x55mm	Sencoted	BS22AABC
Ring shank coilnail AISI304 2,5x45mm	Sencoted	BS19AGBC

RELATED ITEMS



Description	Art. Nr.
Air plug universal 3/8"NPT, male	4000110



Description	Art. Nr.
Air hose kit universal 8mm	4000660



Description	Art. Nr.
Lubrication oil for pneumatic tools 946ml	PC0102



Description	Art. Nr.
Safety glasses	PC1166



Description	Art. Nr.
Lubrication oil for pneumatic tools with moisture guard	PC1295



Description	Art. Nr.
Trio lube 12, 4oz	YB0123